



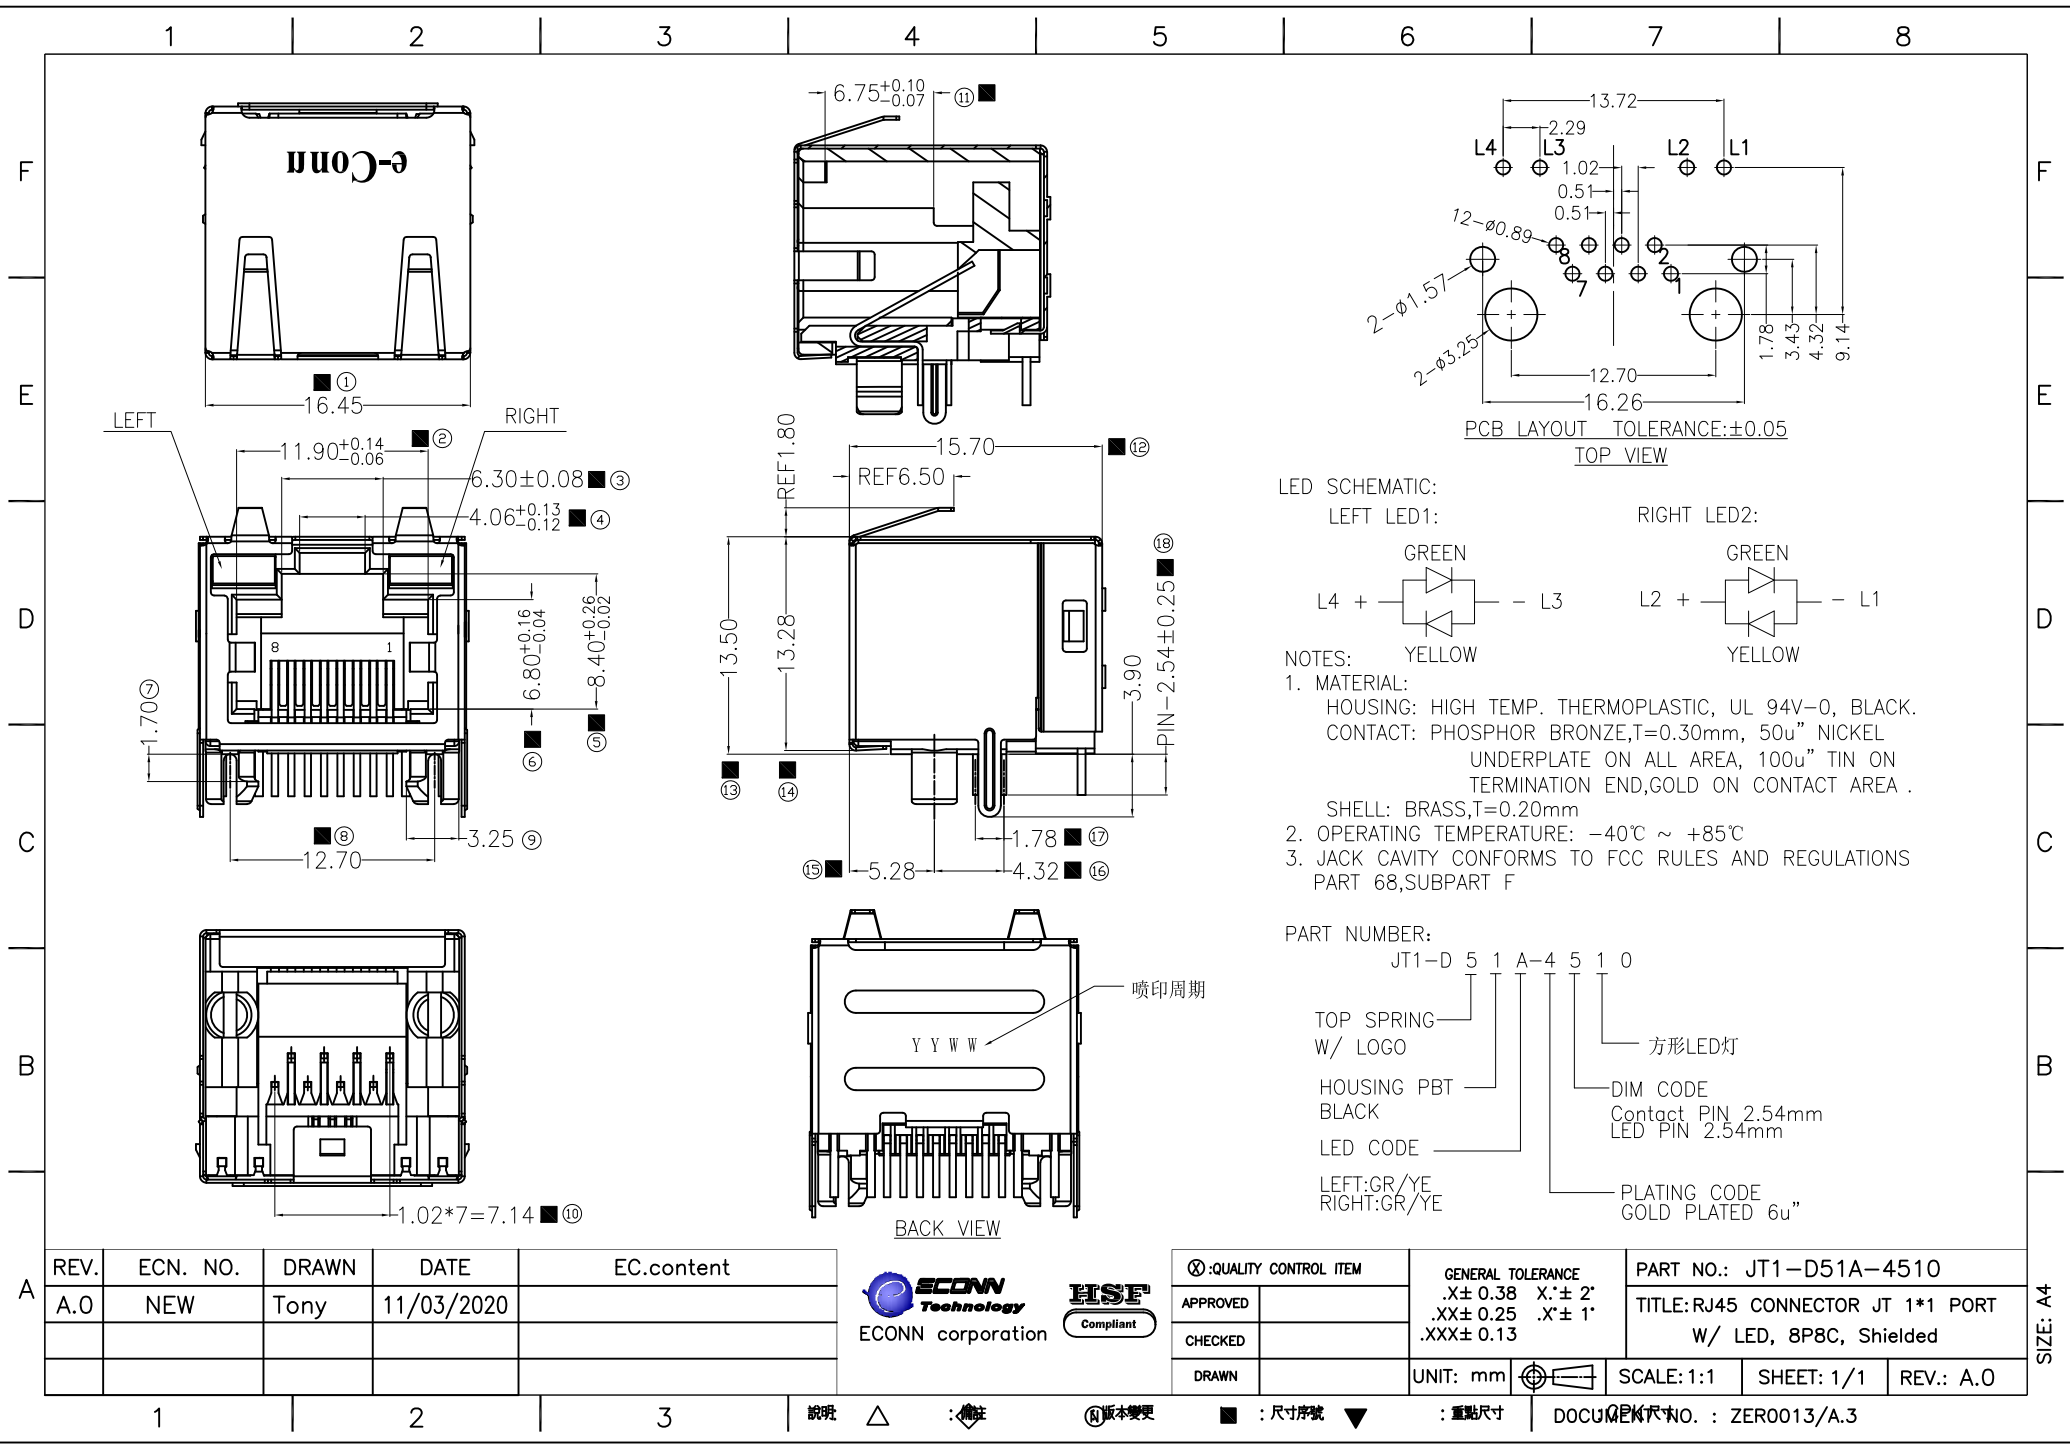


LED SCHEMATIC:

LEFT LED1:



RIGHT LED2:



NOTES:

- 1. MATERIAL:
HOUSING: HIGH TEMP. THERMOPLASTIC, UL 94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE, T=0.30mm, 50u" NICKEL
UNDERPLATE ON ALL AREA, 100u" TIN ON
TERMINATION END, GOLD ON CONTACT AREA .
SHELL: BRASS, T=0.20mm
- 2. OPERATING TEMPERATURE: -40°C ~ +85°C
- 3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F

PART NUMBER:

JT1-D 5 1 A-4 5 1 0

TOP SPRING
W/ LOGO

HOUSING PBT
BLACK

LED CODE

LEFT:GR/YE
RIGHT:GR/YE

方形LED灯

DIM CODE
Contact PIN 2.54mm
LED PIN 2.54mm

PLATING CODE
GOLD PLATED 6u"

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Tony	11/03/2020	



QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JT1-D51A-4510		
APPROVED		.X±0.38	X.'±2'	TITLE:RJ45 CONNECTOR JT 1*1 PORT W/ LED, 8P8C, Shielded		
CHECKED		.XX±0.25	.X'±1'			
DRAWN		.XXX±0.13		UNIT: mm	SCALE: 1:1	SHEET: 1/1
				REV.: A.0		