

F

E

D

C

B

A

F

E


D

C



B

A






SIZE: A4



貼高溫茶色麥拉(寬13*長21.8*厚0.05)
以兩側面為基準面貼多餘的麥拉需
對折貼到另一面(對折前示意图)



兩側面麥拉對折
貼到另一面(折后视图)

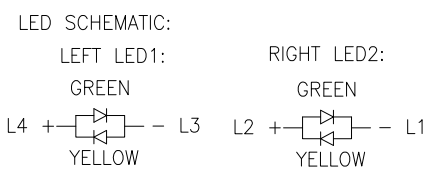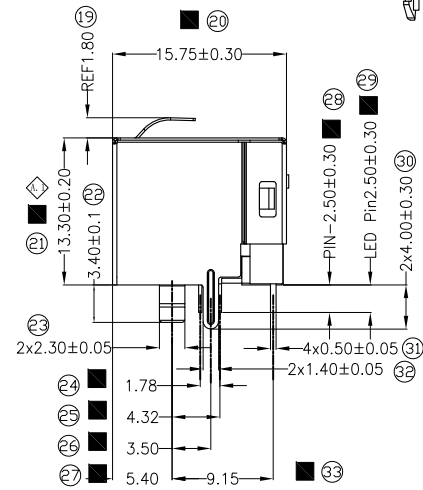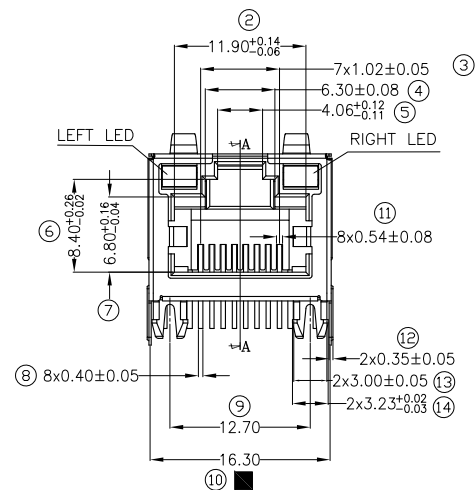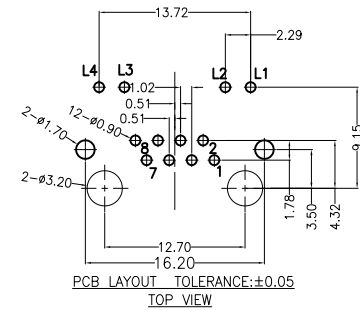

LED SCHEMATIC				
RIGHT LED				
顏色	脚位	波长 (nm)	亮度 (MCD)	
GREEN	L4 + — L3 YELLOW	LF:20mA	LF=20mA	LF=2mA
		G/565~570	3~8	0.3~0.8
YELLOW	L2 + — L1 YELLOW	Y/585~590	3~8	0.3~0.8
		LF:20mA	LF=20mA	LF=2mA
GREEN	L4 + — L3 YELLOW	G/565~570	3~8	0.3~0.8
		Y/585~590	3~8	0.3~0.8

- NOTES:
- 1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.30mm
SHELL:C2680,T=0.20mm
- 2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
- 3.OPERATING TEMPERATURE:-40°C~+85°C.
- 4.THIS PRODUCT CONFORMS TO THE MEET OF IEC 60603-7
- 5.1500V AC 1mA 60s(LED To SHELL FEET)
6. LED只能用瑞鑫源:
- 7.WAVE SOLDERING:260±5°C, 5 SEC MAX
RESISTANCE TO SOLDER:260±5°C, 10±1 SEC

PART NUMBER:

JT1-E F 3 A -2 5 0 2-X

H=13.3mm 新模

Offset 2mm

TOP SPRING

W/O BACK LEG

W/O LOGO

HOUSING PA6T

BLACK

LED CODE

LEFT:GREEN/YELLOW

RIGHT:GREEN/YELLOW

无此码出优比快
H:和碩

2:喇叭口蘑菇脚规格

0:胶芯 黑色

DIM CODE

Contact PIN 2.50mm

LED PIN 2.50mm

PLATING CODE

GOLD PLATED 3u"

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Andy	02/27/2024	-
A.2	EN2408007	Candy	08/16/2024	新增客户代码
A.3	EN2411003	Victor	11/11/2024	增加焊接参数



QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JT1-EF3A-2502	
APPROVED		.X±0.38	X.*±2'	TITLE:RJ45 CONNECTOR JT 1*1 PORT W/ LED, 8P8C, Shielded	
CHECKED		.XX±0.25	.X'±1'		
DRAWN		.XXX±0.13		UNIT: mm	SCALE: 1:1
				SHEET: 1/1	REV.: A.3

說明: △:備註 ◇:版本變更 ㉞:尺寸序號 ■:重點尺寸 ▼:CPK尺寸 DOCUMENT NO. : ZERO013/A.3