
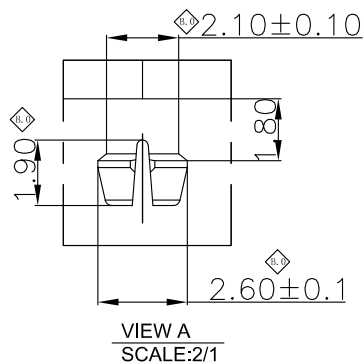
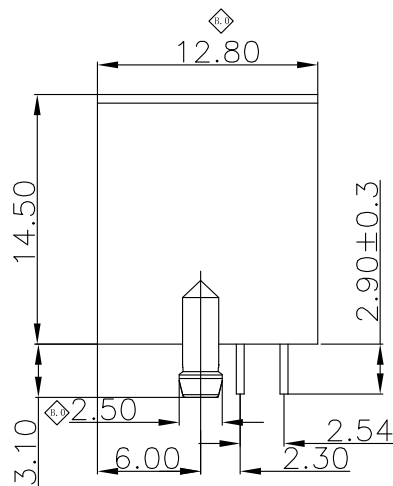
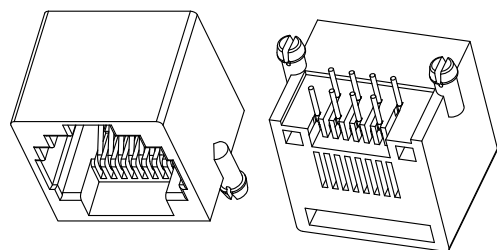



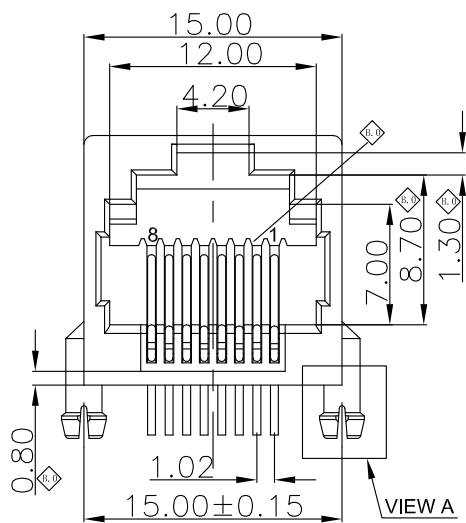

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT YELLOW UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : $1\mu\text{Min Au}$ PLATING OVER NICKEL $40\mu\text{Min}$.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC OR 1500V DC 0.5mA 50/60Hz. 1 Minute.


MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORCE: 3.06 KG.F MAX.
3. PLUG RETENTION : 5.5Kgf MIN QUIESCENT STATE RETENTION 1MINUTE

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

Whether the collocation dimension is in accordance with international standard (FCC Part 68 or TIA-1096-A)

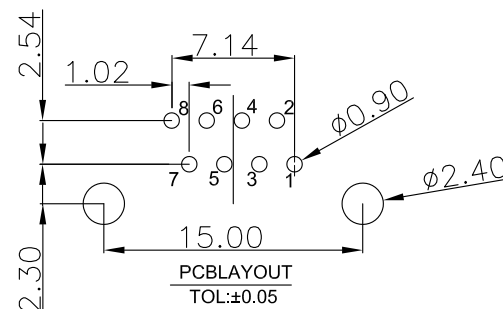

REV.	ECN. NO.	DRAWN	DATE	EC.content
B.0	EN2310008	Candy	6/24/2021	旧模老化, 重开新模, 尺寸/外观稍有变化



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JT1W-C010-38Y0		
APPROVED		.X±0.38	X.'±2'	TITLE:RJ45 JACK 1X1 8P8C W/O SHIELD		
CHECKED		.XX±0.25	.X'±1'			
DRAWN		.XXX±0.13				
UNIT: mm		SCALE: 1:1		SHEET: 1/1	REV.: B.0	

説明: △ : 備註
寸 : CPK尺寸

Ⓝ 版本變更

尺 : 寸

字號

圖號 : ZER0013/A.3

SIZE: A4