

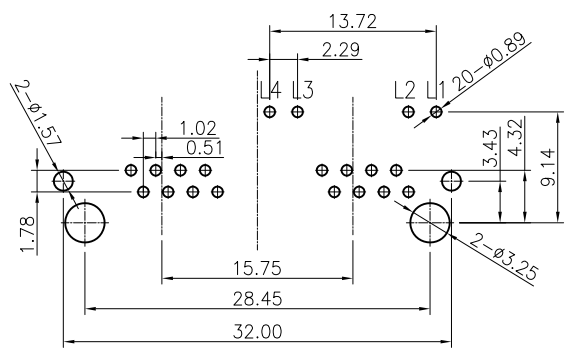
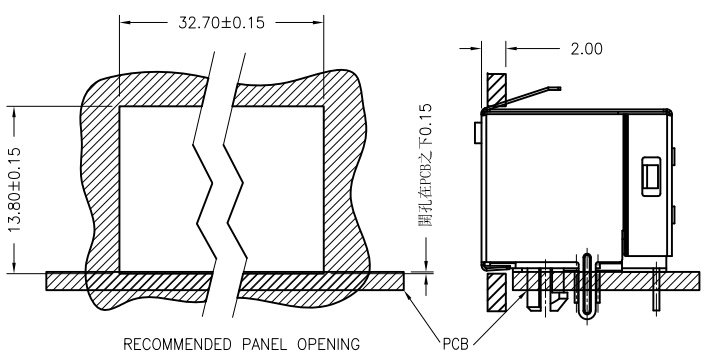
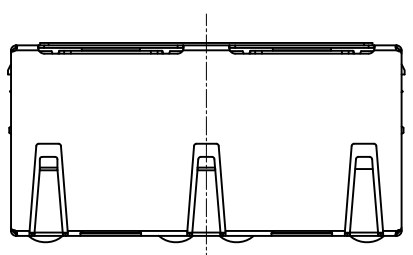
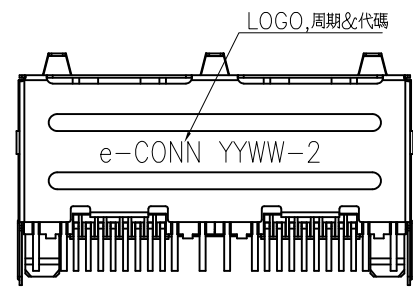


F
E
D
C
B
A


F
E
D
C
B
A

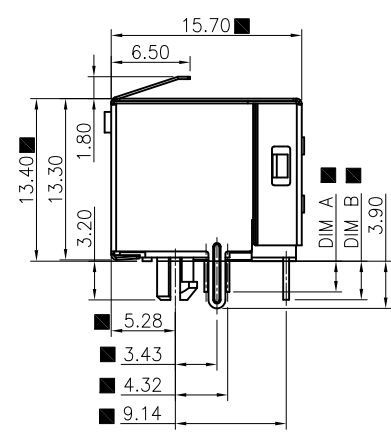

PCB LAYOUT TOLERANCE:±0.05
TOP VIEW

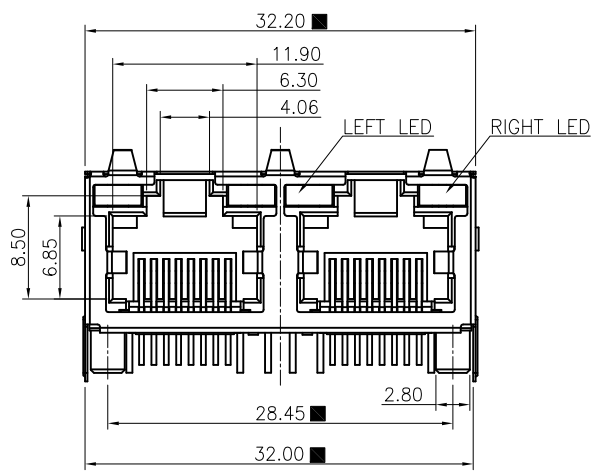

BACK VIEW

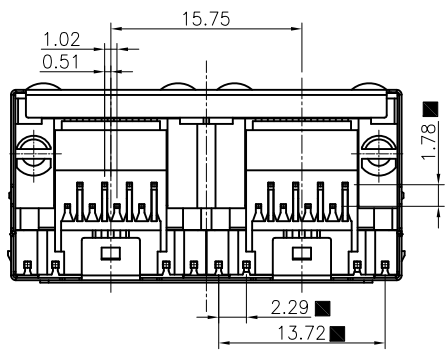

- NOTES:
1. MATERIAL:
HOUSING: HIGH TEMP. THERMOPLASTIC, UL 94V 0, BLACK.
CONTACT: PHOSPHOR BRONZE, T=0.30mm, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN TERMINATION END, GOLD ON CONTACT AREA.
SHELL: T=0.20mm COPPER ZINC ALLOY PLATED WITH NICKEL
 2. OPERATING TEMPERATURE: -40°C ~ +85°C
 3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

PART NUMBER:

JT2-C 5 1 A-2 1 0 0

SHELL CODE
5: W/TOP SPRING
1: Housing PBT

LED CODE

	Left LED#2	Right LED#1
A	L4+ L3- L4- L3+	L2+ L1- L2- L1+
	GR YE	GR YE

0: 膠芯黑色

DIM CODE

CODE	Contact PIN DIM A	LED PIN DIM B
1	2.54	3.18

PLATING CODE
2-GOLD PLATED 3u"

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	ALLEN	10/15/2021	



QUALITY CONTROL ITEM	GENERAL TOLERANCE	PART NO.:
APPROVED	.X± 0.38 X':± 2'	JT2-C51A-2100
CHECKED	.XX± 0.25 X':± 1'	TITLE:RJ45 CONNECTOR JT 1*2 PORT
DRAWN	.XXX± 0.13	W/ LED, 8P8C, Shielded
	UNIT: mm	SCALE: 1:1
		SHEET: 1/1
		REV.: A.0

DOCUMENT NO.: ZERO013/A.3

SIZE: A4

1

2

3

說明 △ : 參照

○ 本圖變更

■ : 尺寸序號 ▼ : 重點尺寸