

Top Spring 5Pcs

LEFT LED:

GREEN

L4 + — L3


RIGHT LED:

GREEN





L2 + — L1



GOLD FLASH AREA (1u"max)

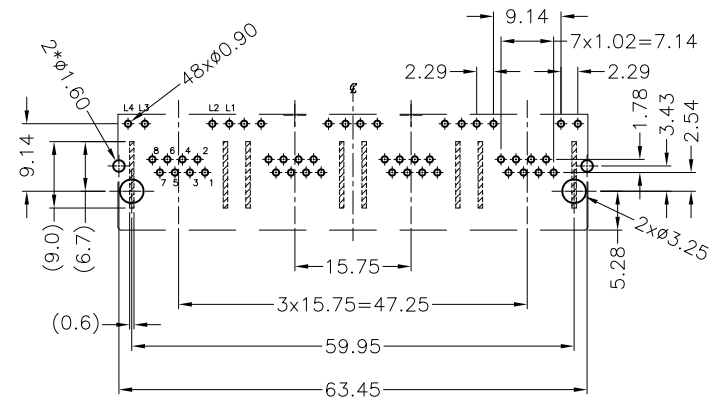

RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05

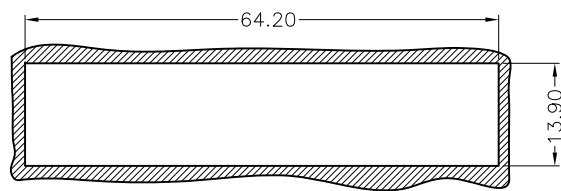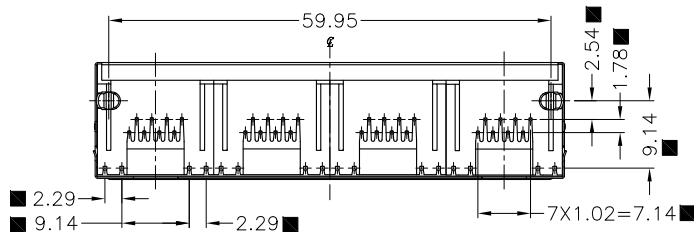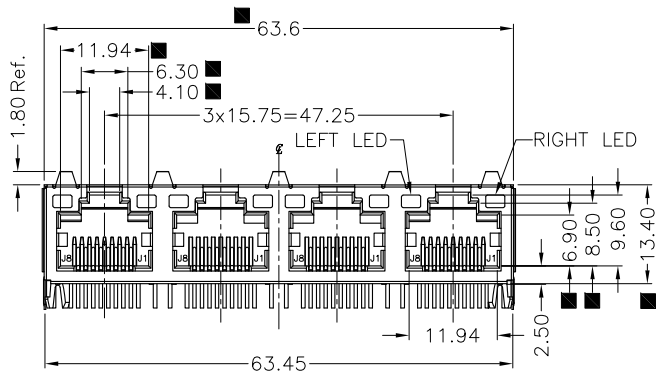

RECOMMENDED
PANEL CUTOUT DIMENSION

P/N RULE:

JT4A-2 1 1 1-G G A M


SHELL CODE
W/ TOP SPRING
W/O BACK LEG
W/ LOGO

Housing: PBT Black

LED CODE
LEFT LED: GREEN
RIGHT LED: GREEN

PIN 3.20mm

G/F For All (圓PIN)

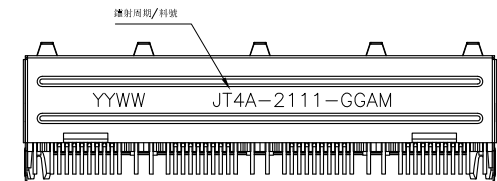

BACK VIEW

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMO PLASTIC (UL94V-0)

CONTACT: PHOSPHOR BRONZE

SHELL: SUS201-1/2H, T=0.20mm

2. FINISHED:

CONTACT: 50u" MIN. NICKEL UNDERPLATING ALL AREA,
SELECT GOLD PLATING ON CONTACT AREA.

SHELL: 30u" MIN. NICKEL PRE-PLATING ALL AREA

3. JACK CAVITY CONFORMS TO FCC RULES AND
REGULATIONS PART 68.500 (D) (2)

REV.	ECN. NO.	DRAWN	DATE	EC.content
C.3	EN2304011	Candy	04/19/2023	业务要求取消“-E”客户代码



QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JT4A-2111-GGAM	
APPROVED		.X $\pm$ 0.38	X' $\pm$ 2'	TITLE: RJ45 Jack W/ LED & SHELL T/H	
CHECKED		.XX $\pm$ 0.25	.X' $\pm$ 1'		
DRAWN		.XXX $\pm$ 0.13		UNIT: mm	SCALE: 1:1
				SHEET: 1/1	REV.: C.3

說明:



版本變更

尺寸

DOCUMENT NO. : ZER0013/A.3

SIZE: A4