
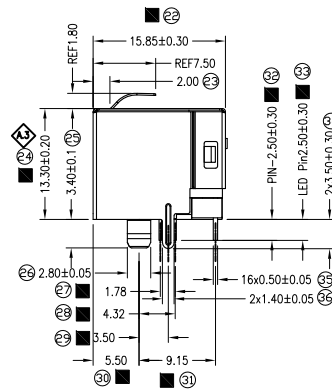
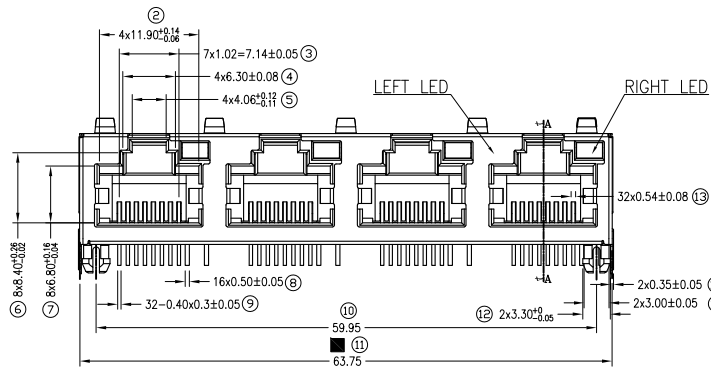
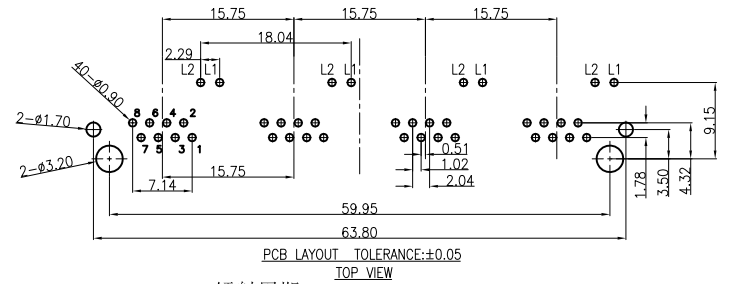



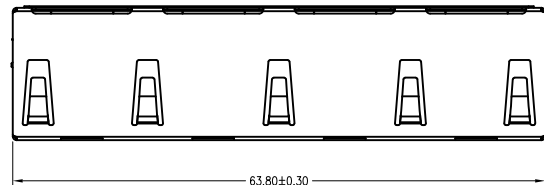

- NOTES:
- 1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.30mm
SHELL:C2680,T=0.20mm
 - 2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
 - 3.OPERATING TEMPERATURE:-40°C~+85°C.
 - 4.THIS PRODUCT CONFORMS TO THE MEET OF IEC 60603-7

PART NUMBER: JT4-E F 3 58 2 5 0 0

H=13.3mm 新模
Offset 2mm
TOP SPRING
W/O BACK LEG
W/O LOGO
HOUSING PA6T
BLACK
LED CODE
LEFT:W/O
RIGHT:GREEN/YELLOW
DIM CODE
Contact PIN 2.50mm
LED PIN 2.50mm
PLATING CODE
GOLD PLATED 3u"

LED SCHEMATIC:

LEFT LED1:
W/O

RIGHT LED2:
GREEN
L2 + - L1
YELLOW

LED SCHEMATIC

		RIGHT LED		
颜色	脚位	波长 (nm)	亮度 (mcd)	
GREEN	GREEN	LF=20mA	LF=20mA	LF=2mA
	L2 + - L1	G/565~570	3~8	0.3~0.8
YELLOW	YELLOW	Y/585~590	3~8	0.3~0.8

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.3	EN2406005	Candy	06/14/2024	按客户要求重新整理图面 将产品高度公差变更为+/-0.20

ECONN Technology
ECONN corporation

HSE
Compliant

QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JT4-EF3582500	
APPROVED		.X±0.38	X.'±2"	TITLE:RJ45 CONNECTOR JT 1*4 PORT W/ LED, 8P8C, Shielded	
CHECKED		.XX±0.25	.X'±1"		
DRAWN		.XXX±0.13			
UNIT: mm		SCALE: 1:1		SHEET: 1/1	REV.: A.3

DOCUMENT NO. : ZERO03/A.3

說明: △ : 備註 (N) : 版本變更 ■ : 尺寸序號

SIZE: A4