


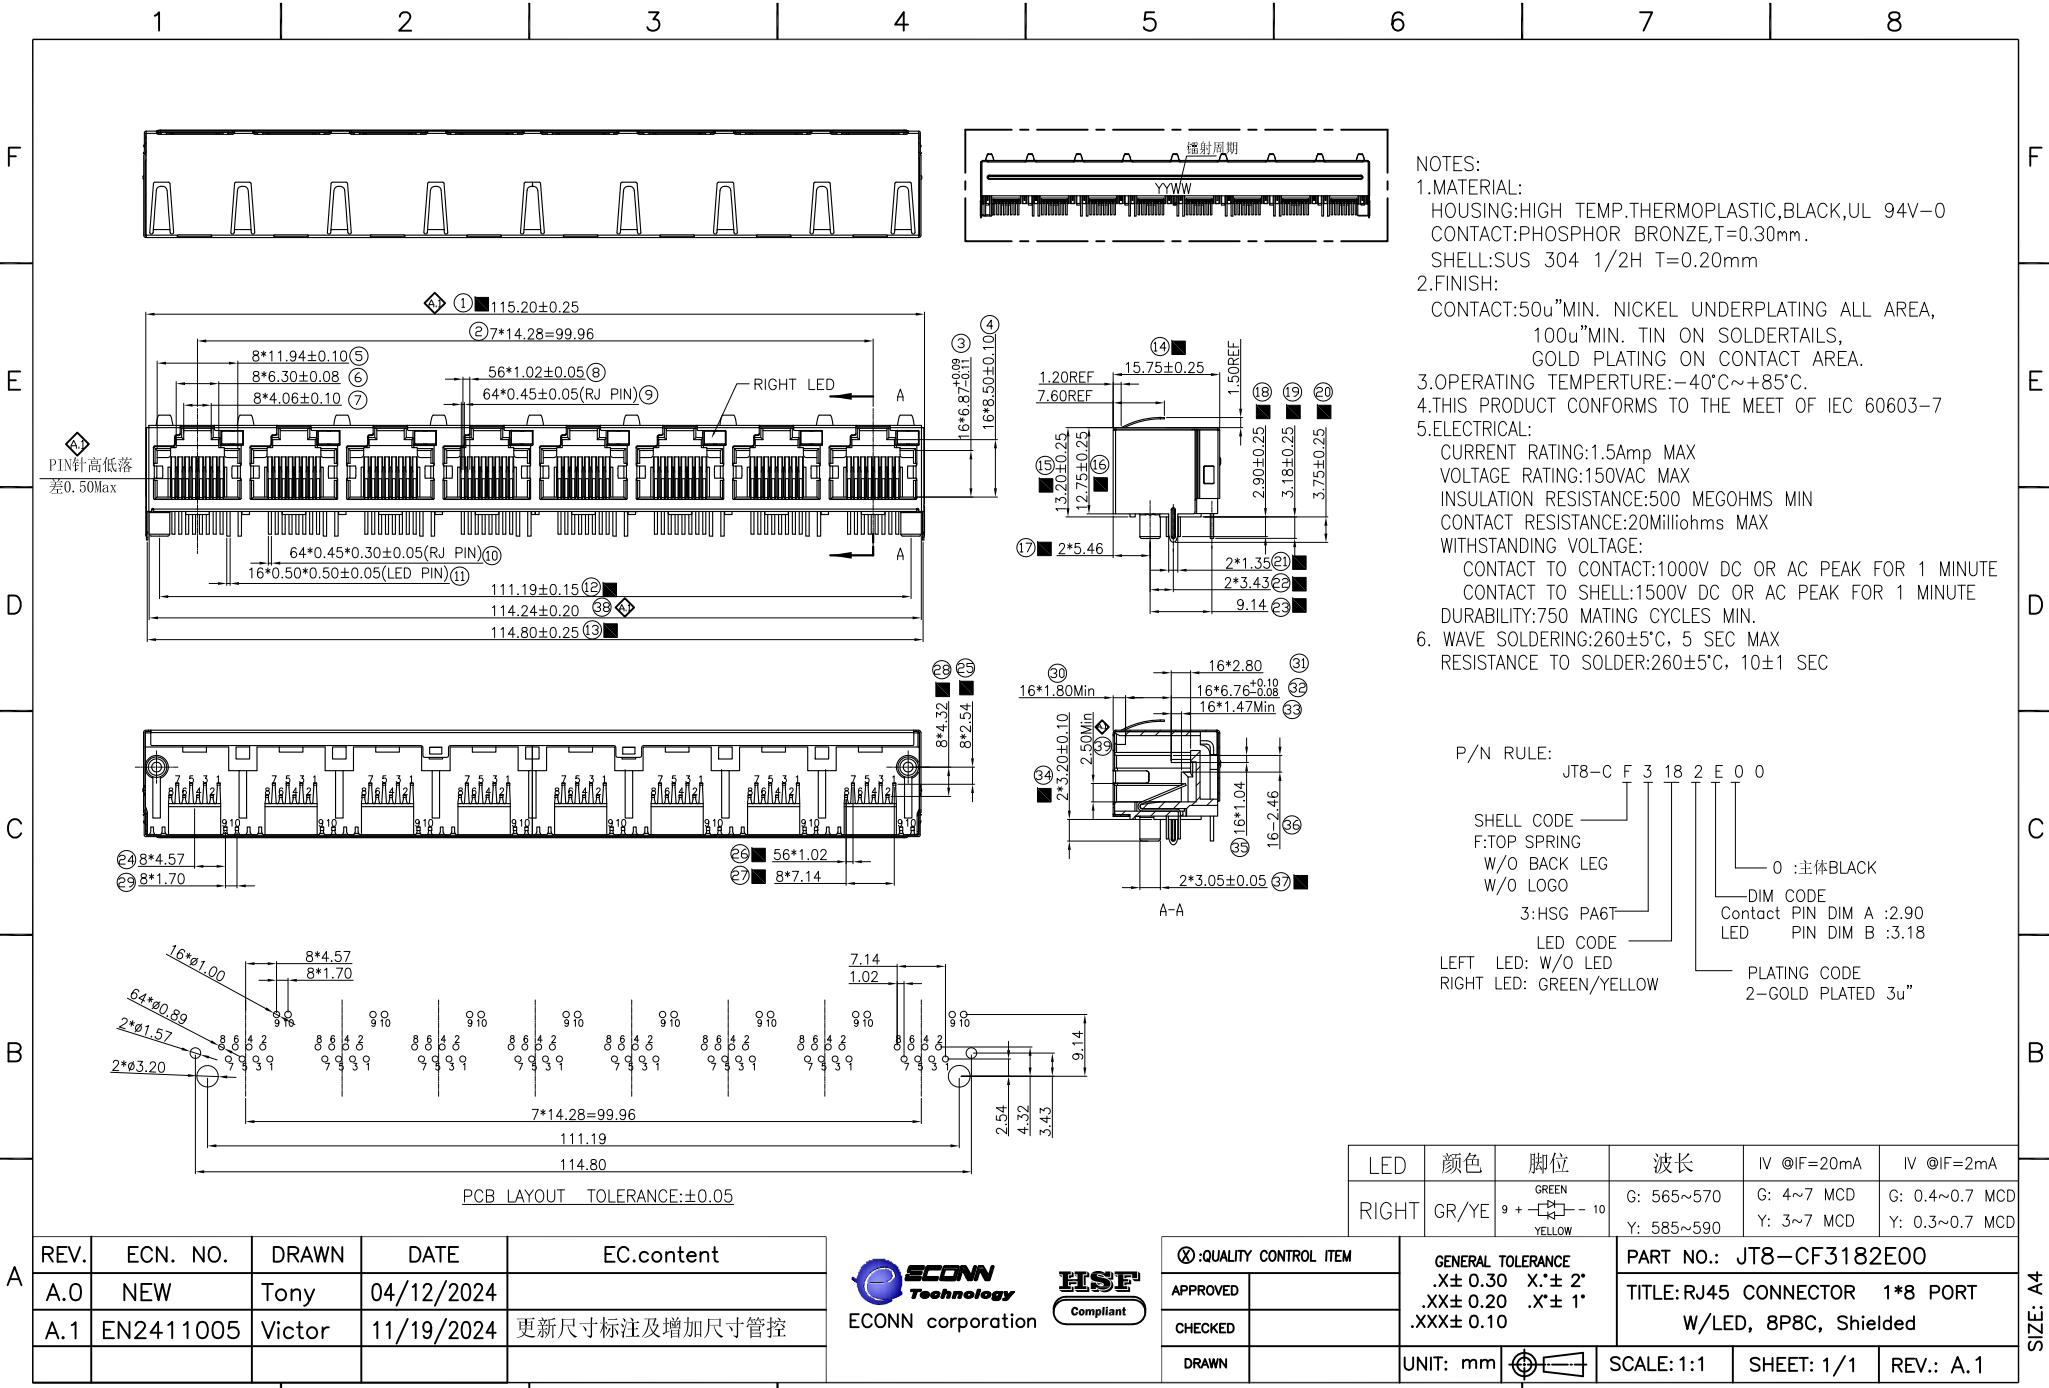

NOTES:
1.MATERIAL:
HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.30mm.
SHELL:SUS 304 1/2H T=0.20mm
2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDERTAILS,
GOLD PLATING ON CONTACT AREA.
3.OPERATING TEMPERATURE:-40°C~+85°C.
4.THIS PRODUCT CONFORMS TO THE MEET OF IEC 60603-7
5.ELECTRICAL:
CURRENT RATING:1.5Amp MAX
VOLTAGE RATING:150VAC MAX
INSULATION RESISTANCE:500 MEGOHMS MIN
CONTACT RESISTANCE:20Milliohms MAX
WITHSTANDING VOLTAGE:
CONTACT TO CONTACT:1000V DC OR AC PEAK FOR 1 MINUTE
CONTACT TO SHELL:1500V DC OR AC PEAK FOR 1 MINUTE
DURABILITY:750 MATING CYCLES MIN.
6. WAVE SOLDERING:260±5°C, 5 SEC MAX
RESISTANCE TO SOLDER:260±5°C, 10±1 SEC

P/N RULE:
JT8-C F 3 18 2 E 0 0
SHELL CODE
F:TOP SPRING
W/O BACK LEG
W/O LOGO
3:HSG PA6T
LED CODE
LEFT LED: W/O LED
RIGHT LED: GREEN/YELLOW
0 :主体BLACK
DIM CODE
Contact PIN DIM A :2.90
LED PIN DIM B :3.18
PLATING CODE
2-GOLD PLATED 3u"

LED	颜色	脚位	波长	IV @IF=20mA	IV @IF=2mA
RIGHT	GR/YE	9 +  10 GREEN YELLOW	G: 565~570 Y: 585~590	G: 4~7 MCD Y: 3~7 MCD	G: 0.4~0.7 MCD Y: 0.3~0.7 MCD

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Tony	04/12/2024	
A.1	EN2411005	Victor	11/19/2024	更新尺寸标注及增加尺寸管控



QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JT8-CF3182E00	
APPROVED		.XX±0.30	X:±2"	TITLE:RJ45 CONNECTOR 1*8 PORT	
CHECKED		.XX±0.20	.X'±1"	W/LED, 8P8C, Shielded	
DRAWN		.XXX±0.10		UNIT: mm	SCALE: 1:1
				SHEET: 1/1	REV.: A.1

說明: △:備註 ◇:版本變更 (N):尺寸序號 ■:重點尺寸 ▼:CPK尺寸

DOCUMENT NO. : ZERO013/A.3