

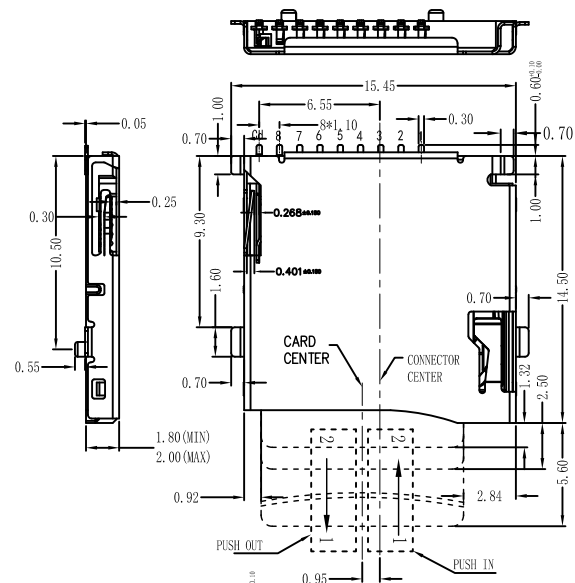


NOTES:

1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
- 2.PLATING:
UNDERPLATE: NICKEL 30u".
CONTACT AREA: 0.6u"GOLD OVER NICKEL.
SOLDER AREA: 80u" TIN OVER NICKEL.
- 3.MULTIMEDIA CARD COMPATIBLE

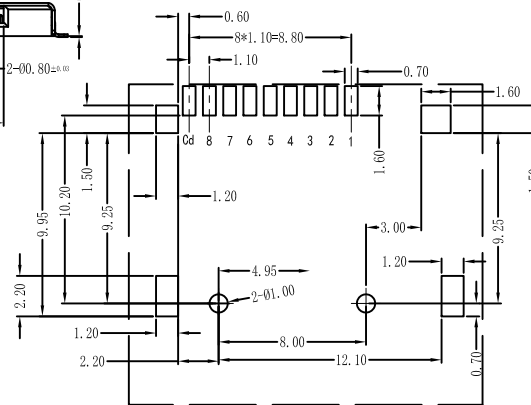

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)



W C T - 2 3 2 1 - 1 2 0 0

T: T-FLASH

2: PUSH PUSH

3: LCP黑色

2: 有铁壳(外壳脚镀镍)

1: 端子8PIN

1: 镀金0.6U"

2: 卷式包装

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)
9	CD	CD	CD

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	LLDONG	10/10/2015	—
B.0	EN2201015	Candy	01/10/2022	优化产品及更改包装规范（原一箱装11K, 现一箱装10K



HSF

Compliant

⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: WCT-2321-1200			
APPROVED		.X± 0.38	X.± 2'	TITLE:T-FLASH PUSH 外焊式			
CHECKED		.XX± 0.25	.X'± 1'				
		.XXX± 0.13					
DRAWN		UNIT: mm		SCALE:1:1	SHEET: 1/1	REV.: B.0	