
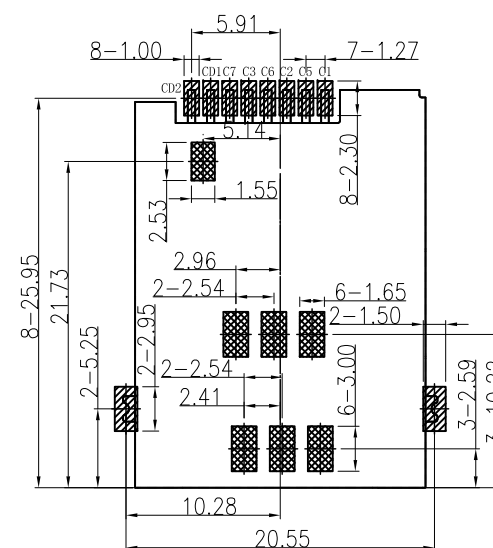
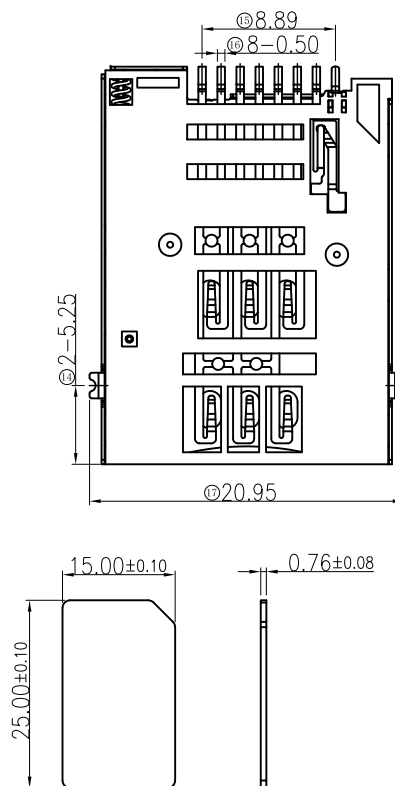



ROHS

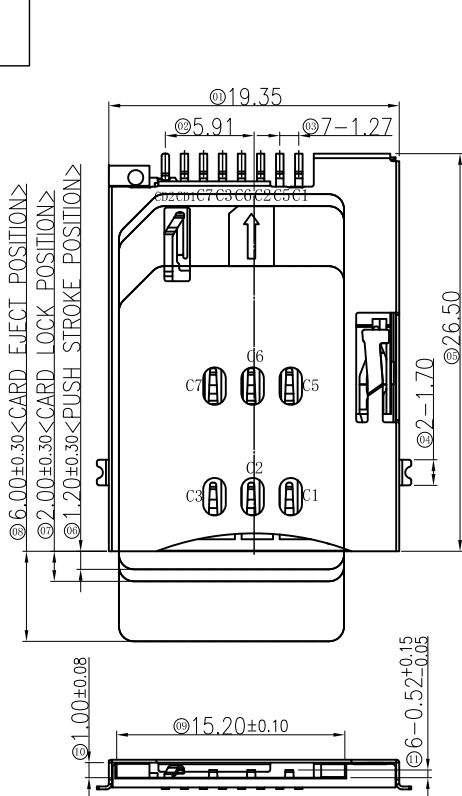

RECOMMENDED PCB LAYOUT

TOLERANCE: ± 0.05

-  SMT SOLDER AREA
 COPPER RESTRICTED AREA
 1. TOUCH AREA OF CONTACT
 TIPS NO ELECTRICAL FUNCTION
 2. NO FIRST PCB_LAYOUT
 CIRCUITS IN THE AREA

Notes:

1. Material:
Housing: High Temperature Thermoplastic
Terminal: Copper Alloy
Shell: Stainless Steel
2. Plating:
Terminal: 50u" Ni Underplated Overall
G/F Plated On Contact Area
Matte Tin Plated On Solder Area
Shell: 30u" Ni Underplated Overall
G/F Plated On Contact Area And Solder Area
3. Technical Speciality:
Rated Voltage: 30V
Current Rating: 0.5A
Insulation Resistance: 1000M Ω Min.
Contact Resistance: 100m Ω Max.
Withstanding Voltage: 500V DC For 1 Minutes.
Operating Temperature: -40C ~ +75C Humidity 80% R.H Max.

PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD1	POL
CD2	Detect Switch

CIRCUIT DIAGRAM FOR DETECT SWITCHES	
	
CARD INSERTED	WITHOUT CARD

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.O	NEW	Candy	02/20/2024	–



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE .X± 0.38 .X.* 2° .XX± 0.25 .X.* 1° .XXX± 0.13		PART NO.: WK-3007		
APPROVED				TITLE: 1. 80H Push-Push SIM Card		
CHECKED						
DRAWN		UNIT: mm		SCALE: 1:1	SHEET: 1/1	REV.: A.0

SIZE: A4

說明: : 備註 : 版本變更

■尺寸序號

:重點尺寸

DOCUMENT NO. : ZER0013/A.3