



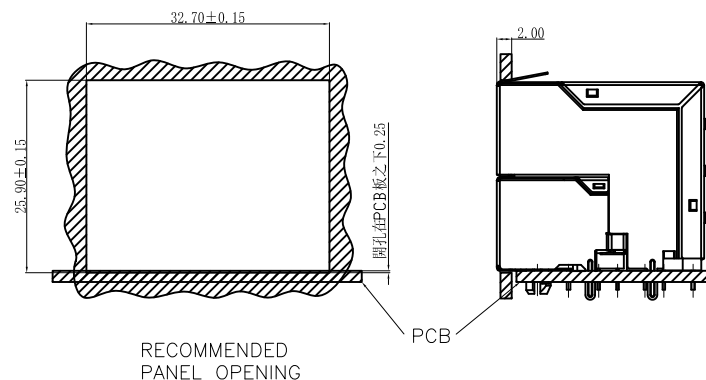

NOTES:

1. MATERIALS:
HOUSING: PBT BLACK(UL94V-0)
CONTACTS: PHOSPHOR BRONZE T:0.35MM
2. FINISH:
CONTACT: 50u" NICKEL LUNDERPLAT ON ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
GOLD PLATED ON CONTACT AREA.
SHIELD: COPPER ALLOY T:0.20MM PLATED WITH NICKEL
3. OPERATING TEMPERATURE: -40°C ~ +85°C
4. JACK CAVITY CONFORMS TO FCC RULES AND
REGULATIONS PART 68, SUBPART F


PART NUMBER:




BACK VIEW

LED SCHEMATIC:

```
LEFT LED1:
LEFT LED2:
```



RIGHT LED1
RIGHT LED2



5: TWO TYPES W/TOP SPRING ———— JM2-C 5 1 A-4 5 1 0 ———— DIM CODE

0: 兩件式鐵殼
1: 方形燈

CODE	Contact PIN DIM A	LED PIN DIM B
5	2.54	2.54

— PLATING CODE
GOLD PLATED 6u"

A	Left LED#2		Right LED#	
	L4+ L3-	L4- L3+	L2+ L1-	L2- L1+
	GR	YE	GR	YE

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	LLDONG	01/02/2018	–
A.1	EN2102001	Relly	03/05/2021	



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE .X± 0.38 .X.± 2' .XX± 0.25 .X.± 1' .XXX± 0.13		PART NO.: JM2-C51A-4510		
APPROVED				TITLE:RJ45 CONNECTOR JM 2*2 PROT		
CHECKED				W/LED, 8P8C,		
DRAWN		UNIT: mm		SCALE: 1:1	SHEET: 1/1	REV.: A.1

說明: △: 備註 ◇: 版本變更 ⑨: 尺寸序號 ■: 重點尺寸 ▼: CPK 尺寸 DOCUMENT NO. : ZER0013/A.3

SIZE: A4	
----------	--