




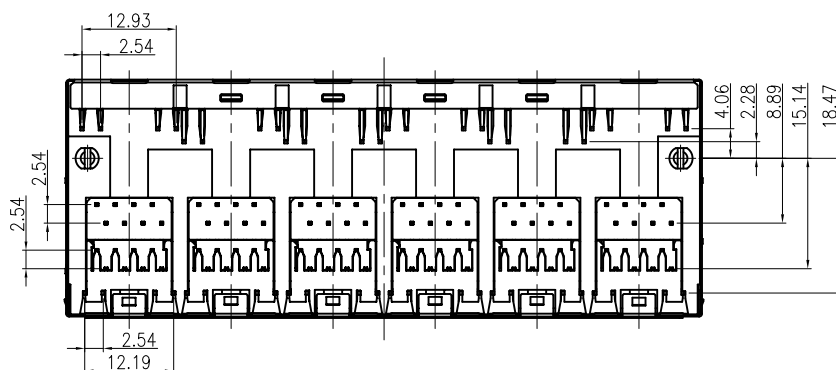


LED SCHEMATIC:

```
LEFT LED1:
LEFT LED2:
```



RIGHT LED1:
RIGHT LED2:

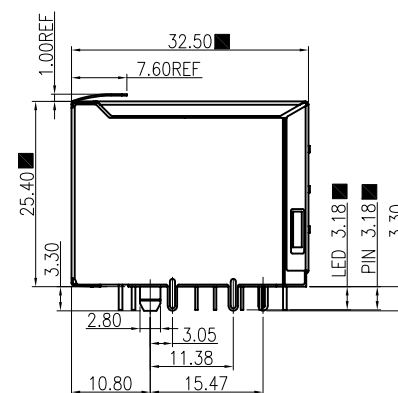

PART NUMBER:

JMA-C F 1 90 4 6 6 Y

F:W/ TOP SPR
W/O LOGO
W/O BACK LE

1-Housing PBT

—6: SUS 304 上支架贴麦拉 铝箔

M CODE

LED CODE				
74	Left LED#2		Right LED#1	
	L4+ L3-	L4- L3+	L2+ L1-	L2- L1-
	BLUE	ORANGE	ORANGE	

CODE	Contact PIN DIM A	LED PIN DIM B
6	3.18	3.18

— PLATING CODE
4-GOLD PLATED 6u"

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Victor	05/21/2025	



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE .X± 0.38 .X'± 2' .XX± 0.25 .X'± 1' .XXX± 0.13		PART NO.: JMA—CF190466Y		
APPROVED				TITLE: RJ45 CONNECTOR JM 2*6PORT		
CHECKED				W/LED, 8P8C, Shielded, Thru-Hole		
DRAWN		UNIT: mm		SCALE: 1:1	SHEET: 1/2	REV.: A.0

SIZE: A4	
----------	--

說明: △: 備註 ◇: 版本變更 ④: 尺寸序號 ■: 重點尺寸 ▼: CPK 尺寸

DOCUMENT NO. : ZER0013/A.3

1 2 3 4 5 6 7 8

F

E

D

C

B

A

F

E

D

C

B

A

鐳射周期

YYWW

BACK VIEW

87.70±0.15


25.90±0.15

開孔在PCB板之下0.12

PCB

RECOMMENDED PANEL OPENING

2.00

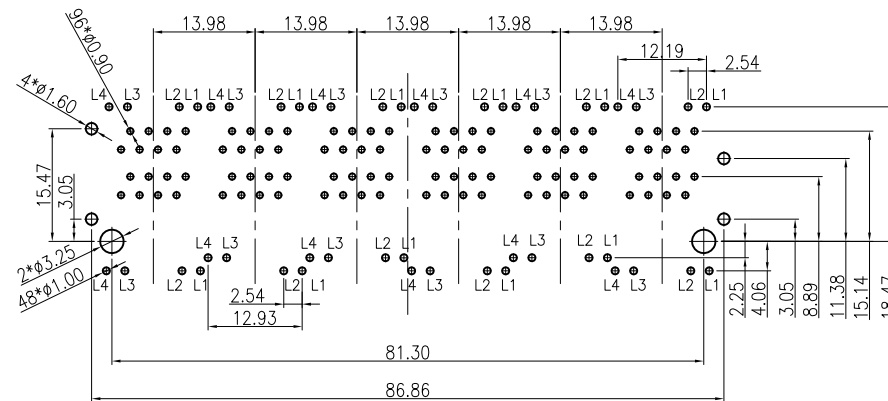

PCB LAYOUT TOLERANCE:±0.05

TOP VIEW

NOTES:

1.MATERIAL:

HOUSING:BLACK, UL 94V-0

CONTACT:PHOSPHOR BORNZE,T=0.35mm

SHELL: SUS304 ,T=0.20mm

2.FINISH:

CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,

100u"MIN. TIN ON SOLDER TAILS,

GOLD PLATING ON CONTACT AREA.

SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA

3.OPERATING TEMPERATURE:-40°C~+85°C.

4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Victor	05/21/2025	



⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JMA-CF190466Y		
APPROVED		.X± 0.38	.X.± 2'	TITLE:RJ45 CONNECTOR JM 2*6PORT W/LED, 8P8C, Shielded, Thru-Hole		
CHECKED		.XX± 0.25	.X'± 1'			
DRAWN		.XXX± 0.13				
		UNIT: mm		SCALE: 1:1	SHEET: 2/2	REV.: A.0

1 2 3

說明: △: 備註 ◇: 版本變更 ①: 尺寸序號 ■: 重點尺寸 ▼: CPK尺寸

DOCUMENT NO. : ZERO013/A.3

SIZE: A4