



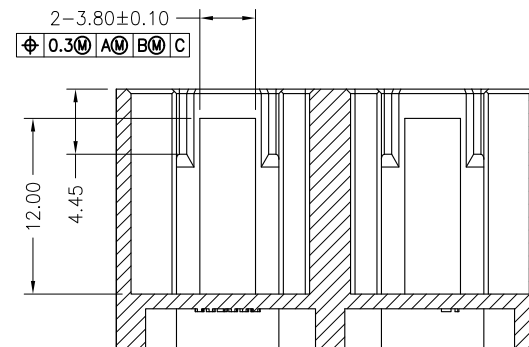

SEC. C-C

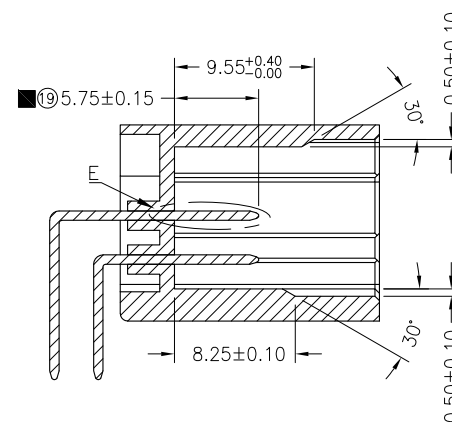

SEC. A-A

 **ECONN**
Technology
ECONN corporation



 **HSF**
Compliant

⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE $.X \pm 0.38$ $.X_s \pm 2'$ $.XX \pm 0.25$ $.X_s \pm 1'$ $.XXX \pm 0.13$		PART NO.: CD2-C060-1000			
APPROVED				TITLE: 16Pin 信號組合插接器			
CHECKED	TONY						
DRAWN	ALLEN	UNIT: mm		SCALE: 1:1	SHEET: 1/2	REV.: C.6	



說明: △: 備註 ◇: 版本變更 ④: 尺寸序號 ■: 重點尺寸 ▼: CPK 尺寸

DOCUMENT NO. : ZER0013/A.3

SIZE: A4

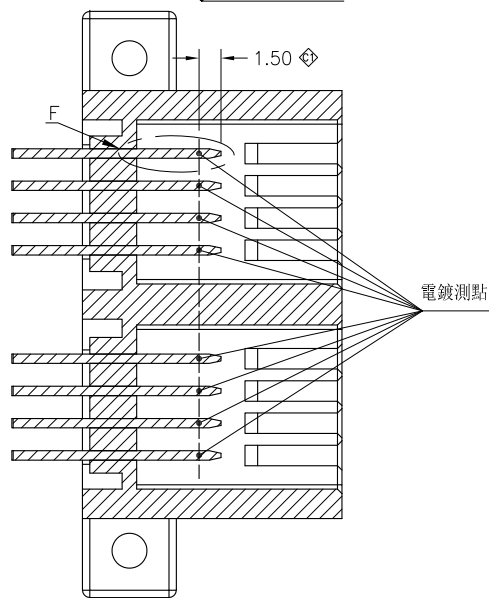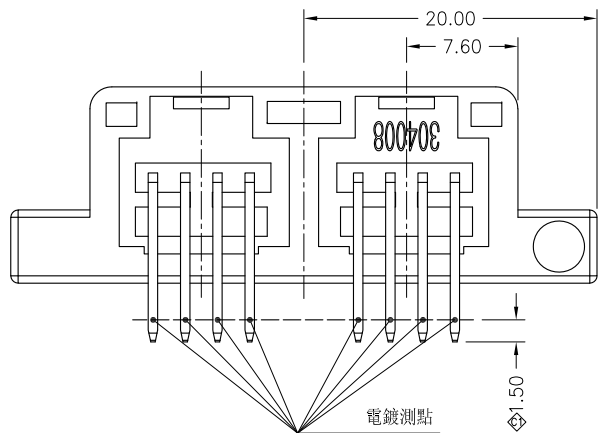

SEC. D-D

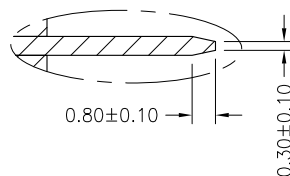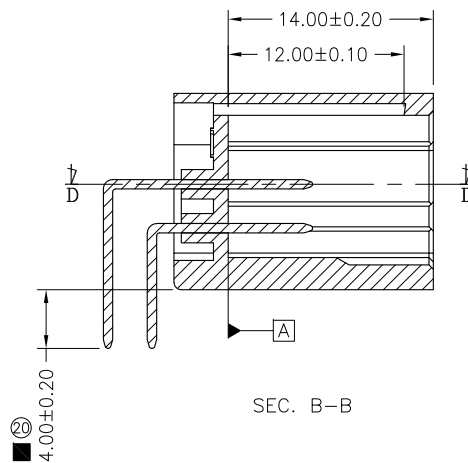

DETAIL F
2:1

技術要求:

1. 去毛刺, 倒銳邊.
2. 端子材質C2680-H, 電鍍規格: 鍍銀底50u"~120u", 鍍霧錫100u"~220u".
3. 塑膠材質為PA66+30%G. F.
4. 塑膠料必須為全新料.
5. 所有材料均無鉛/符合限制有害物質指令 (RoHS) 2011/65/EU規範要求.
6. 每Pin端子保持力必須達到2.5kg以上.
7. 文字為仿宋陽文, 字寬1.2, 凸起高度0.2mm.
8. (⊗)表示測量塑膠根部, (⊕) 標示測量塑膠口部

e-CONN PART NO:

C D 2-C 0 6 0 - 1 0 0 0

HOUSING CODE
6:PA66 BLACK

PLATING CODE

REV.	ECN. NO.	DRAWN	DATE	EC.content
C.4	EN1610003	YMeng	10/08/2016	修改端子口部外露尺寸公差
C.5	EN1701003	WangLei	01/05/2017	圖面公差調整
C.6	EN1703014	WangLei	03/23/2017	圖面尺寸序號重新排列



⊗: QUALITY CONTROL ITEM	GENERAL TOLERANCE .X±0.38 X: ±2" .XX±0.25 .X: ±1" .XXX±0.13	PART NO.: CD2-C060-1000
APPROVED		TITLE: 16Pin 信號組合插接器
CHECKED	TONY	
DRAWN	ALLEN	UNIT: mm
		SCALE: 1:1
		SHEET: 2/2
		REV.: C.6

說明: △ 備註 ◇ 版本變更 ⑨ 尺寸序號 ■ 重點尺寸 ▼: CPK尺寸

DOCUMENT NO. : ZER0013/A.3

SIZE: A4