




REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	YYting	2017.4.21	
A.1	EN2005015	ALLEN	2020.06.05	更新保持力要求

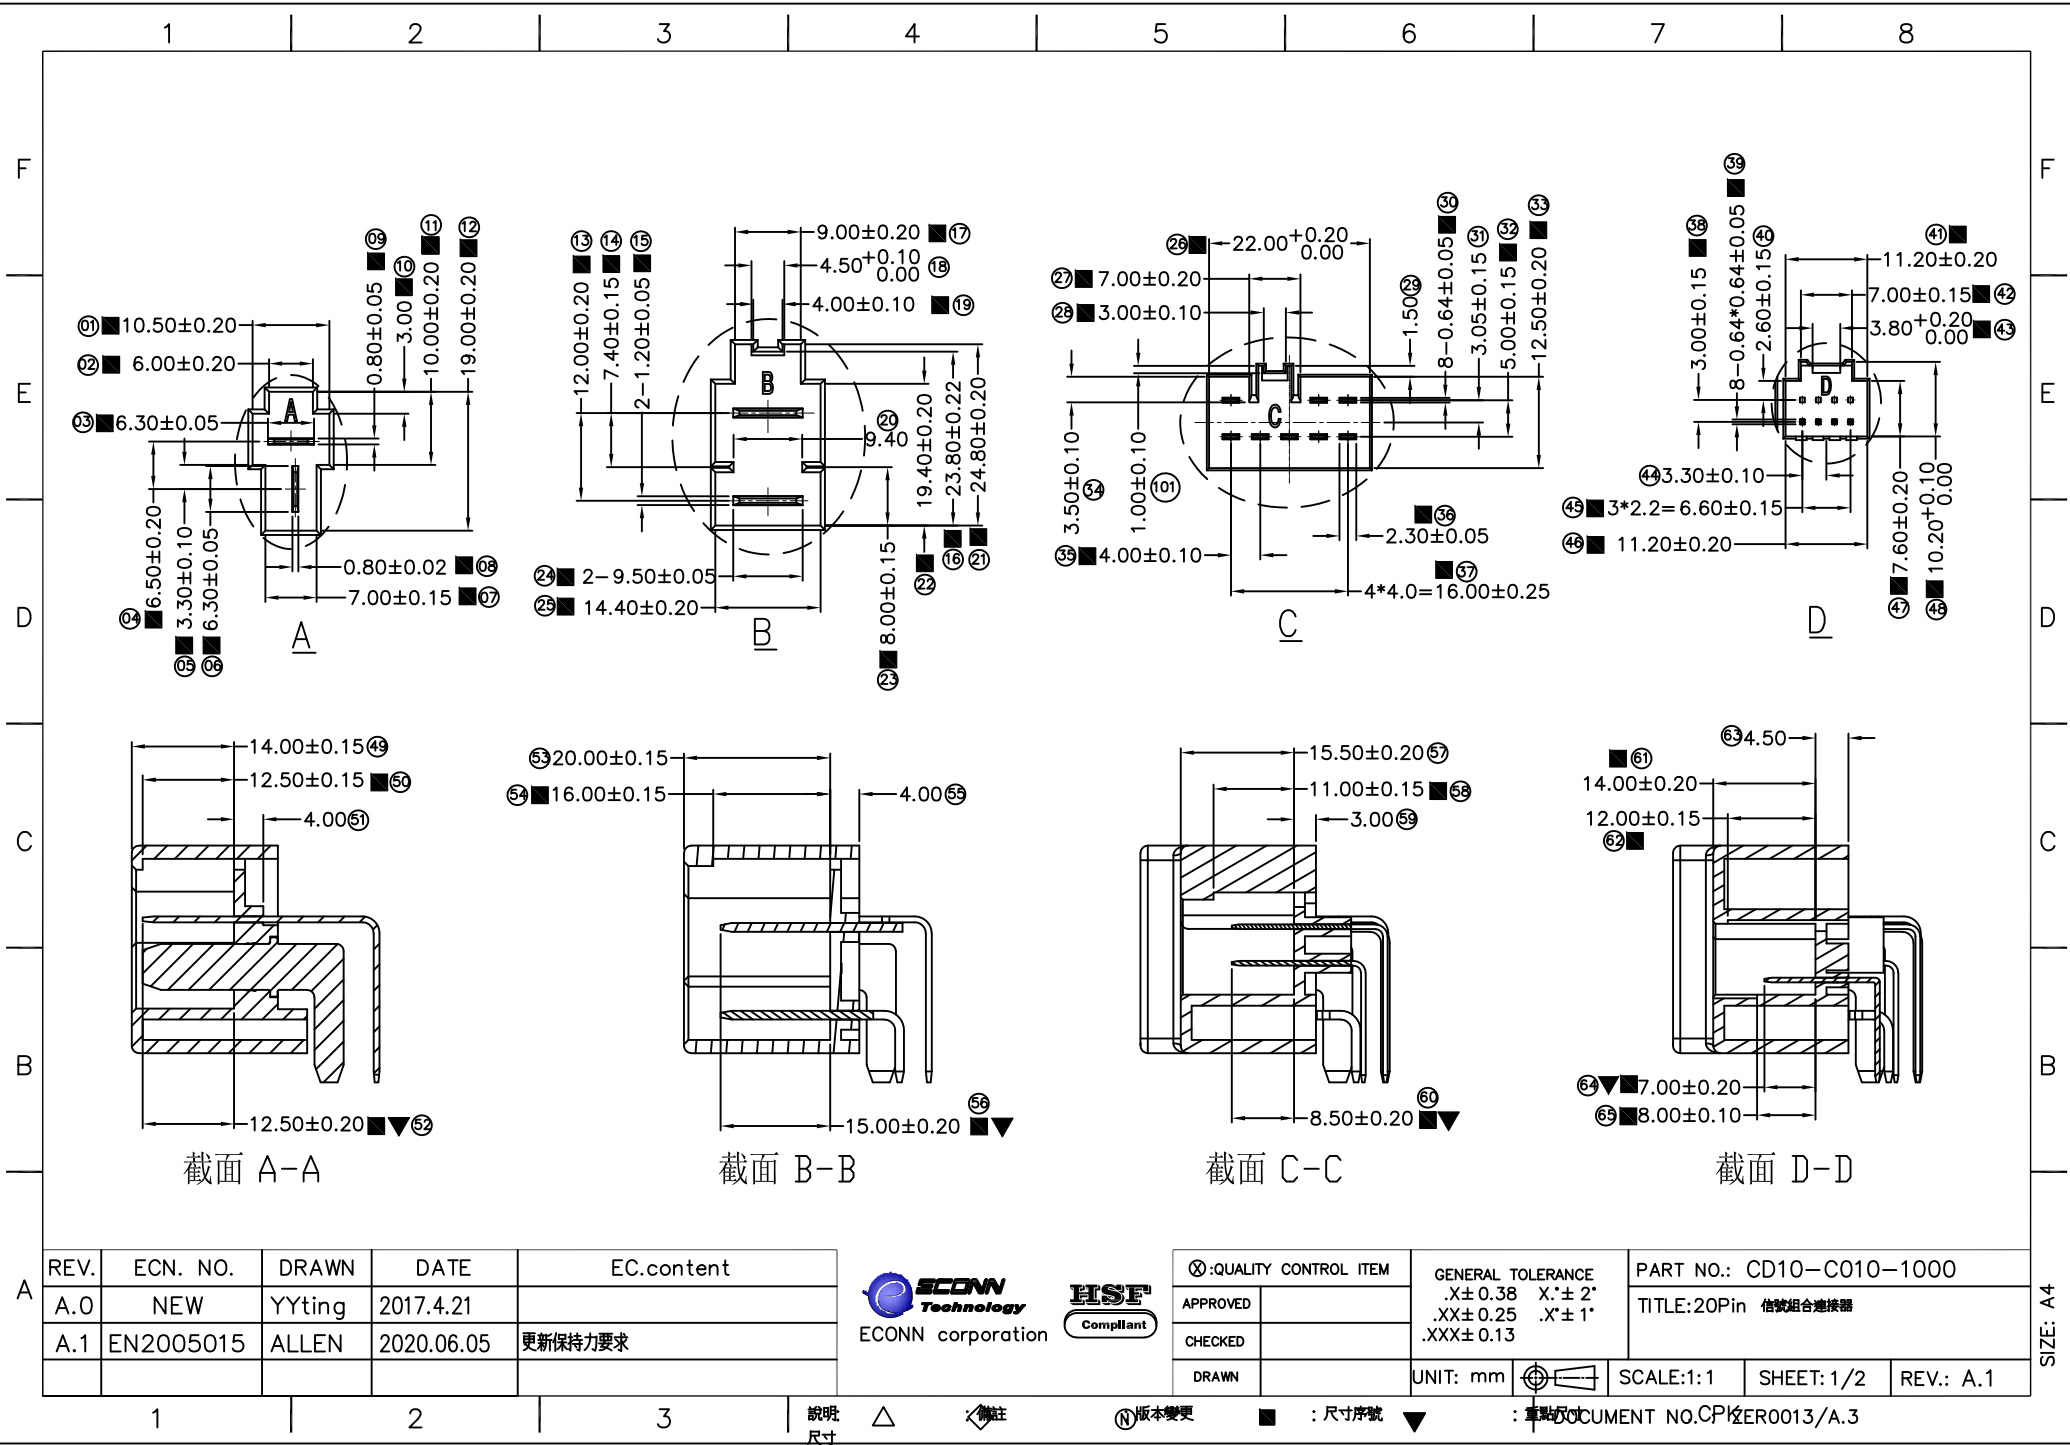

⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE .X±0.38 X.*±2° .XX±0.25 X.*±1° .XXX±0.13		PART NO.: CD10-C010-1000	
APPROVED				TITLE: 20Pin 信號組合連接器	
CHECKED					
DRAWN		UNIT: mm		SCALE: 1:1	SHEET: 1/2
				REV.: A.1	

說明
尺寸




版本變更

尺寸序號



DOCUMENT NO. CP10ER0013/A.3

SIZE: A4

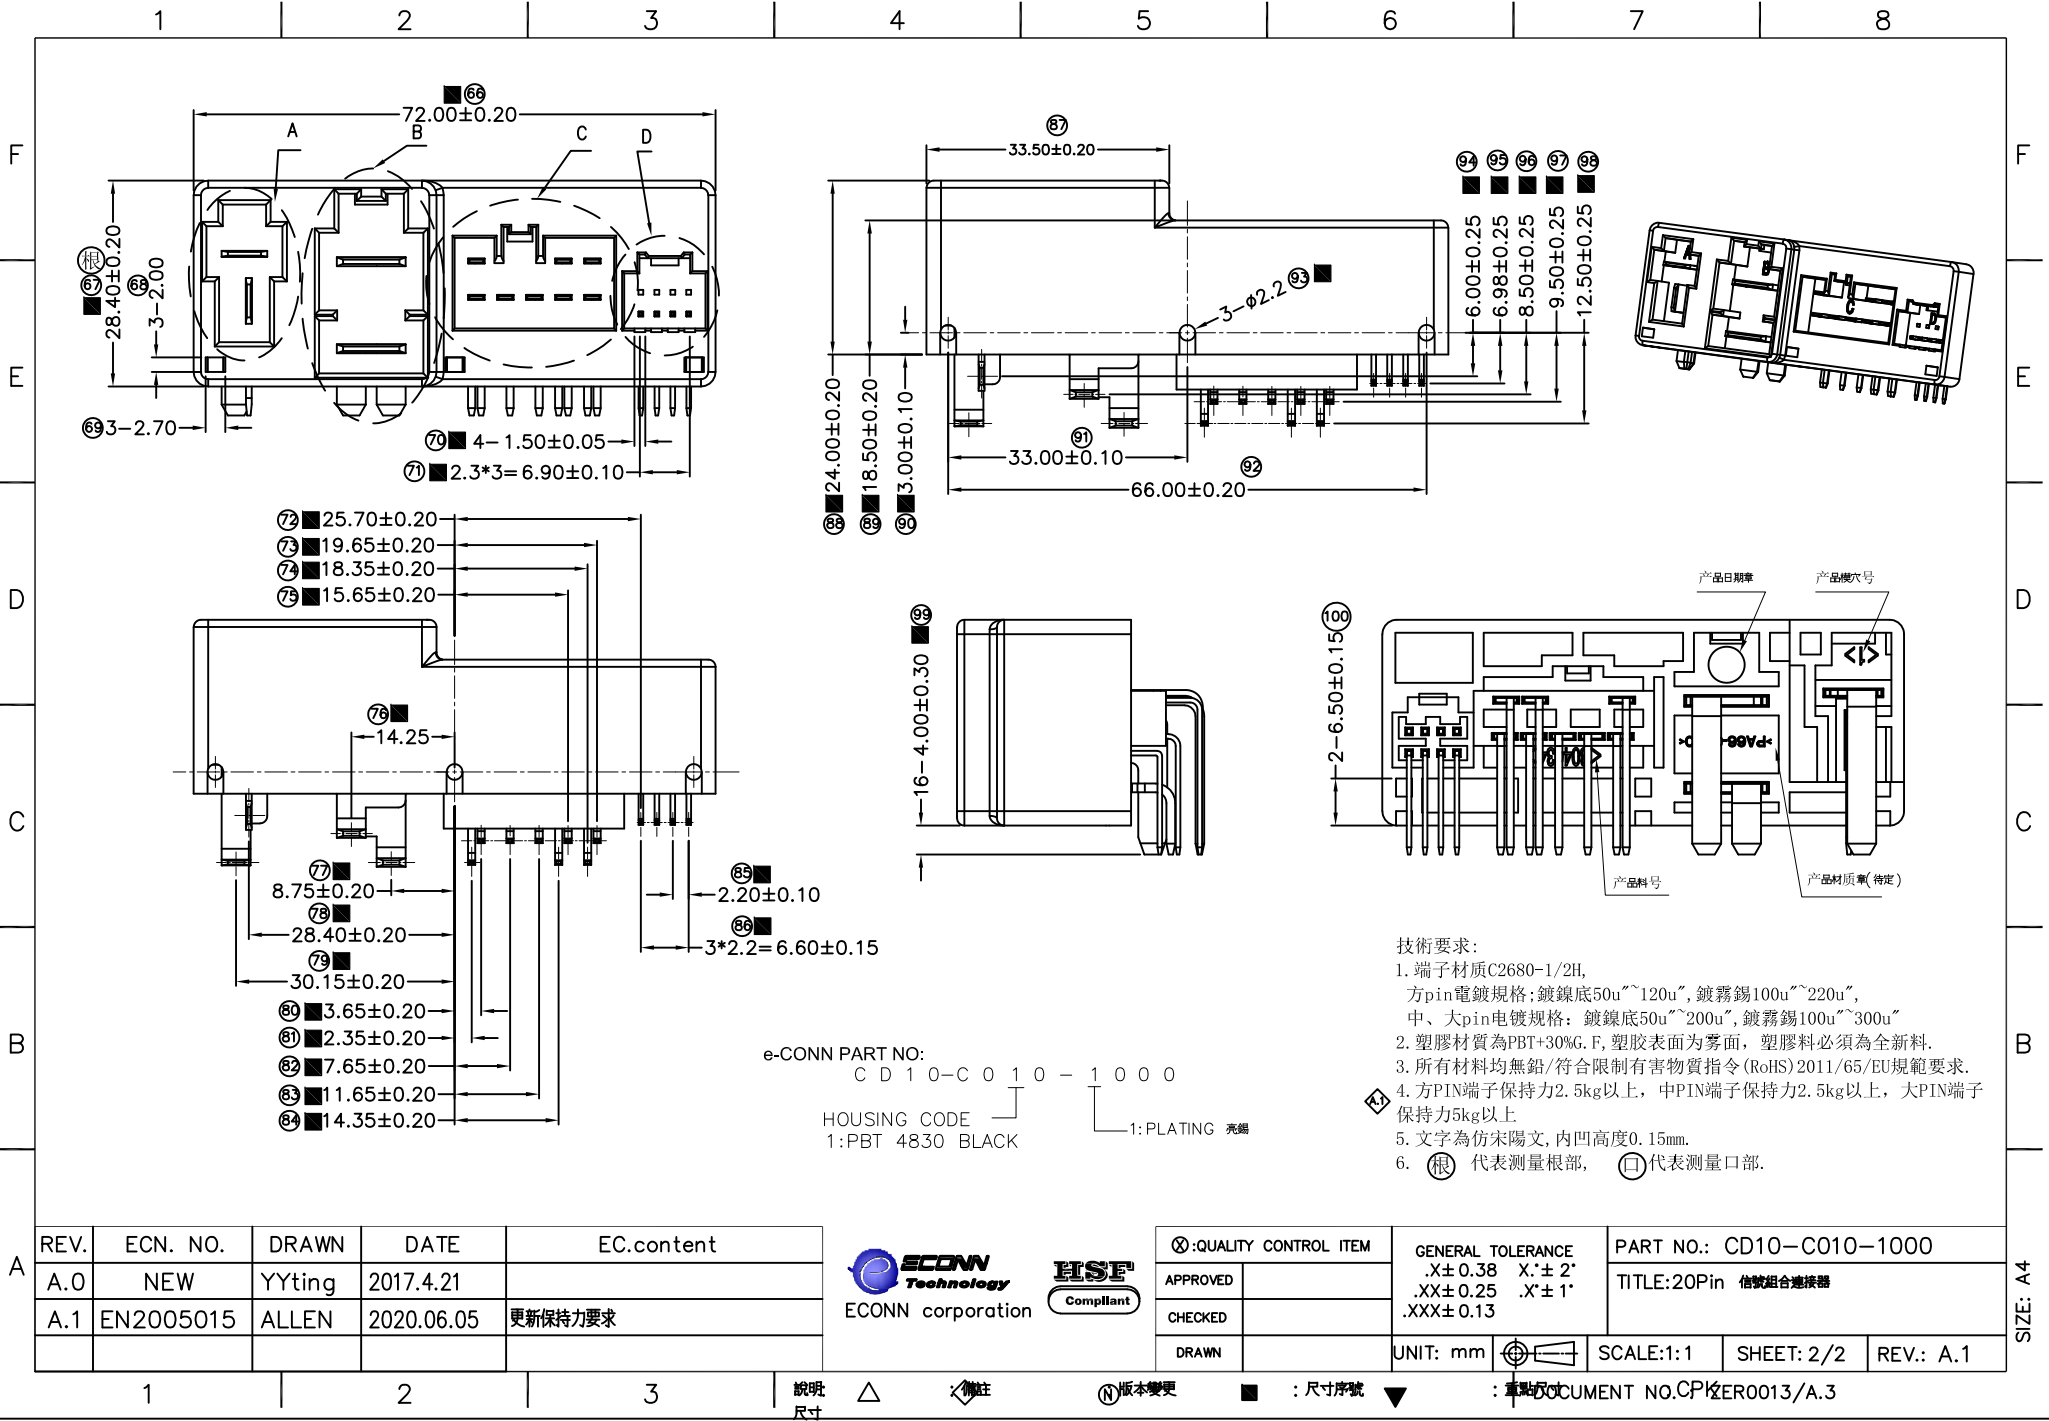

F
E
D
C
B
A

F
E
D
C
B
A

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	YYting	2017.4.21	
A.1	EN2005015	ALLEN	2020.06.05	更新保持力要求



⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: CD10-C010-1000		
APPROVED		.X±0.38	.X:±2°	TITLE:20Pin 信號組合連接器		
CHECKED		.XX±0.25	.X:±1°			
DRAWN		.XXX±0.13				
		UNIT: mm		SCALE:1:1	SHEET: 2/2	REV.: A.1

e-CONN PART NO:
C D 1 0 - C 0 1 0 - 1 0 0 0
HOUSING CODE
1:PBT 4830 BLACK
1:PLATING 亮鍍

- 技術要求:
1. 端子材質C2680-1/2H, 方pin電鍍規格:鍍銀底50u"~120u", 鍍霧錫100u"~220u", 中、大pin電鍍規格: 鍍銀底50u"~200u", 鍍霧錫100u"~300u"
 2. 塑膠材質為PBT+30%G.F, 塑膠表面為霧面, 塑膠料必須為全新料.
 3. 所有材料均無鉛/符合限制有害物質指令 (RoHS) 2011/65/EU規範要求.
 4. 方PIN端子保持力2.5kg以上, 中PIN端子保持力2.5kg以上, 大PIN端子保持力5kg以上
 5. 文字為仿宋陽文, 內凹高度0.15mm.
 6. (根) 代表測量根部, (口) 代表測量口部.

