


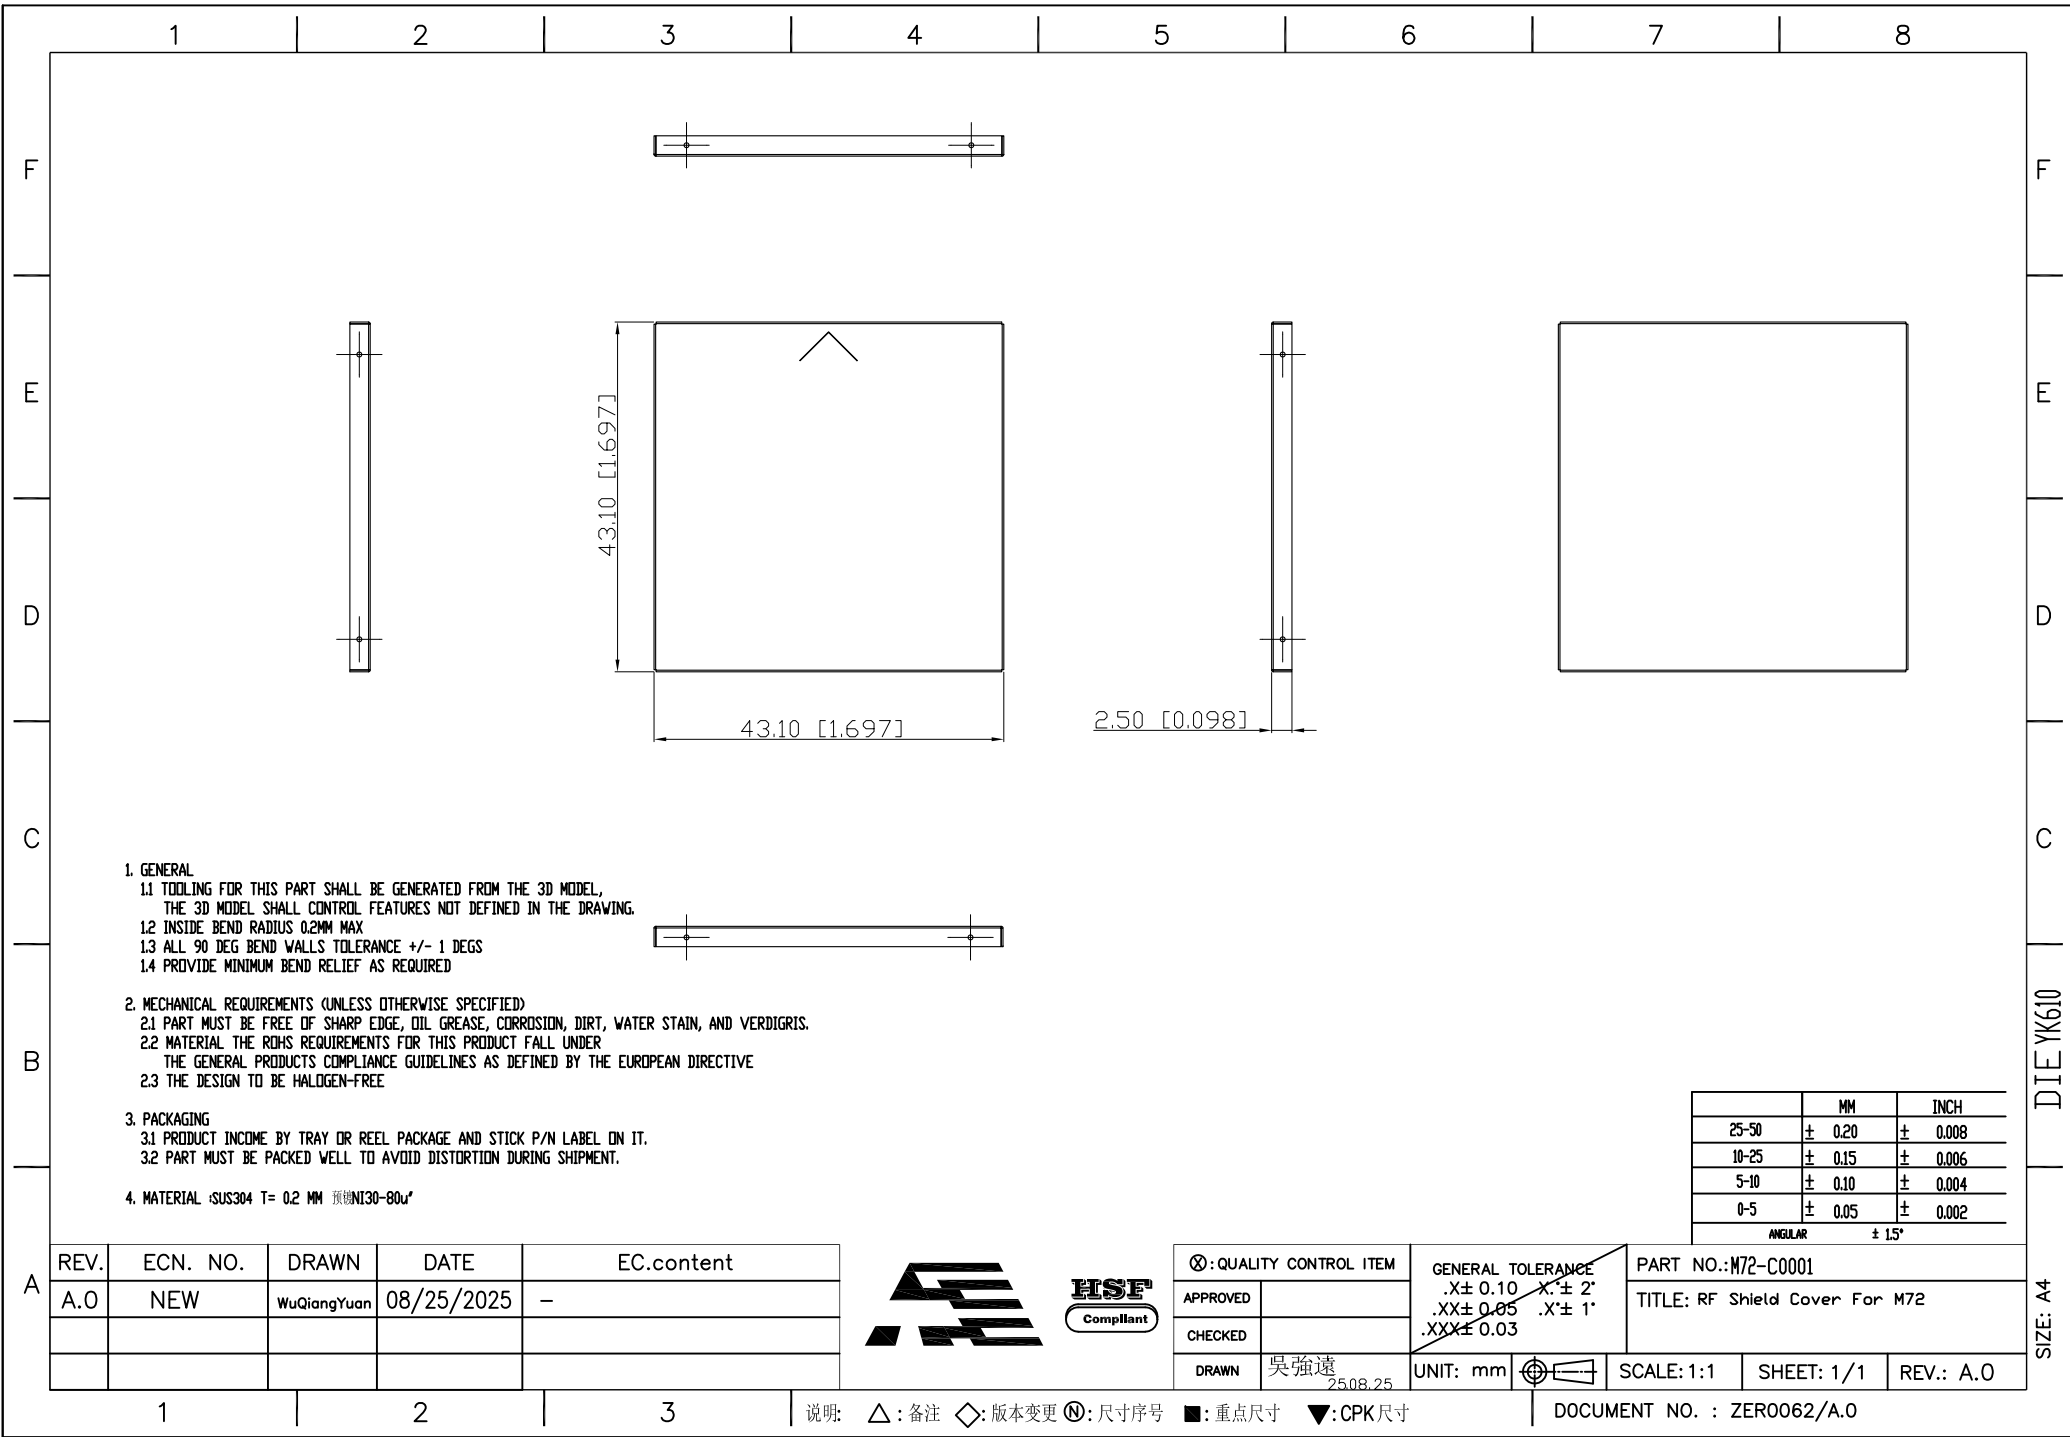

1. GENERAL
- 1.1 TOOLING FOR THIS PART SHALL BE GENERATED FROM THE 3D MODEL, THE 3D MODEL SHALL CONTROL FEATURES NOT DEFINED IN THE DRAWING.
- 1.2 INSIDE BEND RADIUS 0.2MM MAX
- 1.3 ALL 90 DEG BEND WALLS TOLERANCE +/- 1 DEGS
- 1.4 PROVIDE MINIMUM BEND RELIEF AS REQUIRED

2. MECHANICAL REQUIREMENTS (UNLESS OTHERWISE SPECIFIED)
- 2.1 PART MUST BE FREE OF SHARP EDGE, OIL GREASE, CORROSION, DIRT, WATER STAIN, AND VERDIGRIS.
- 2.2 MATERIAL THE ROHS REQUIREMENTS FOR THIS PRODUCT FALL UNDER THE GENERAL PRODUCTS COMPLIANCE GUIDELINES AS DEFINED BY THE EUROPEAN DIRECTIVE
- 2.3 THE DESIGN TO BE HALOGEN-FREE

3. PACKAGING
- 3.1 PRODUCT INCOME BY TRAY OR REEL PACKAGE AND STICK P/N LABEL ON IT.
- 3.2 PART MUST BE PACKED WELL TO AVOID DISTORTION DURING SHIPMENT.

4. MATERIAL :SUS304 T= 0.2 MM 预切N130-80u'

	MM	INCH
25-50	± 0.20	± 0.008
10-25	± 0.15	± 0.006
5-10	± 0.10	± 0.004
0-5	± 0.05	± 0.002
ANGULAR		± 15°

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	WuQiangYuan	08/25/2025	-



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.:M72-C0001		
APPROVED		.X± 0.10	X:± 2°	TITLE: RF Shield Cover For M72		
CHECKED		.XX± 0.05	.X:± 1°			
DRAWN	吴强远	.XXX± 0.03				
		UNIT: mm		SCALE: 1:1	SHEET: 1/1	REV.: A.0

说明: △: 备注 ◇: 版本变更 ①: 尺寸序号 ■: 重点尺寸 ▼: CPK尺寸

DOCUMENT NO. : ZER0062/A.0

DIE YK610
SIZE: A4