


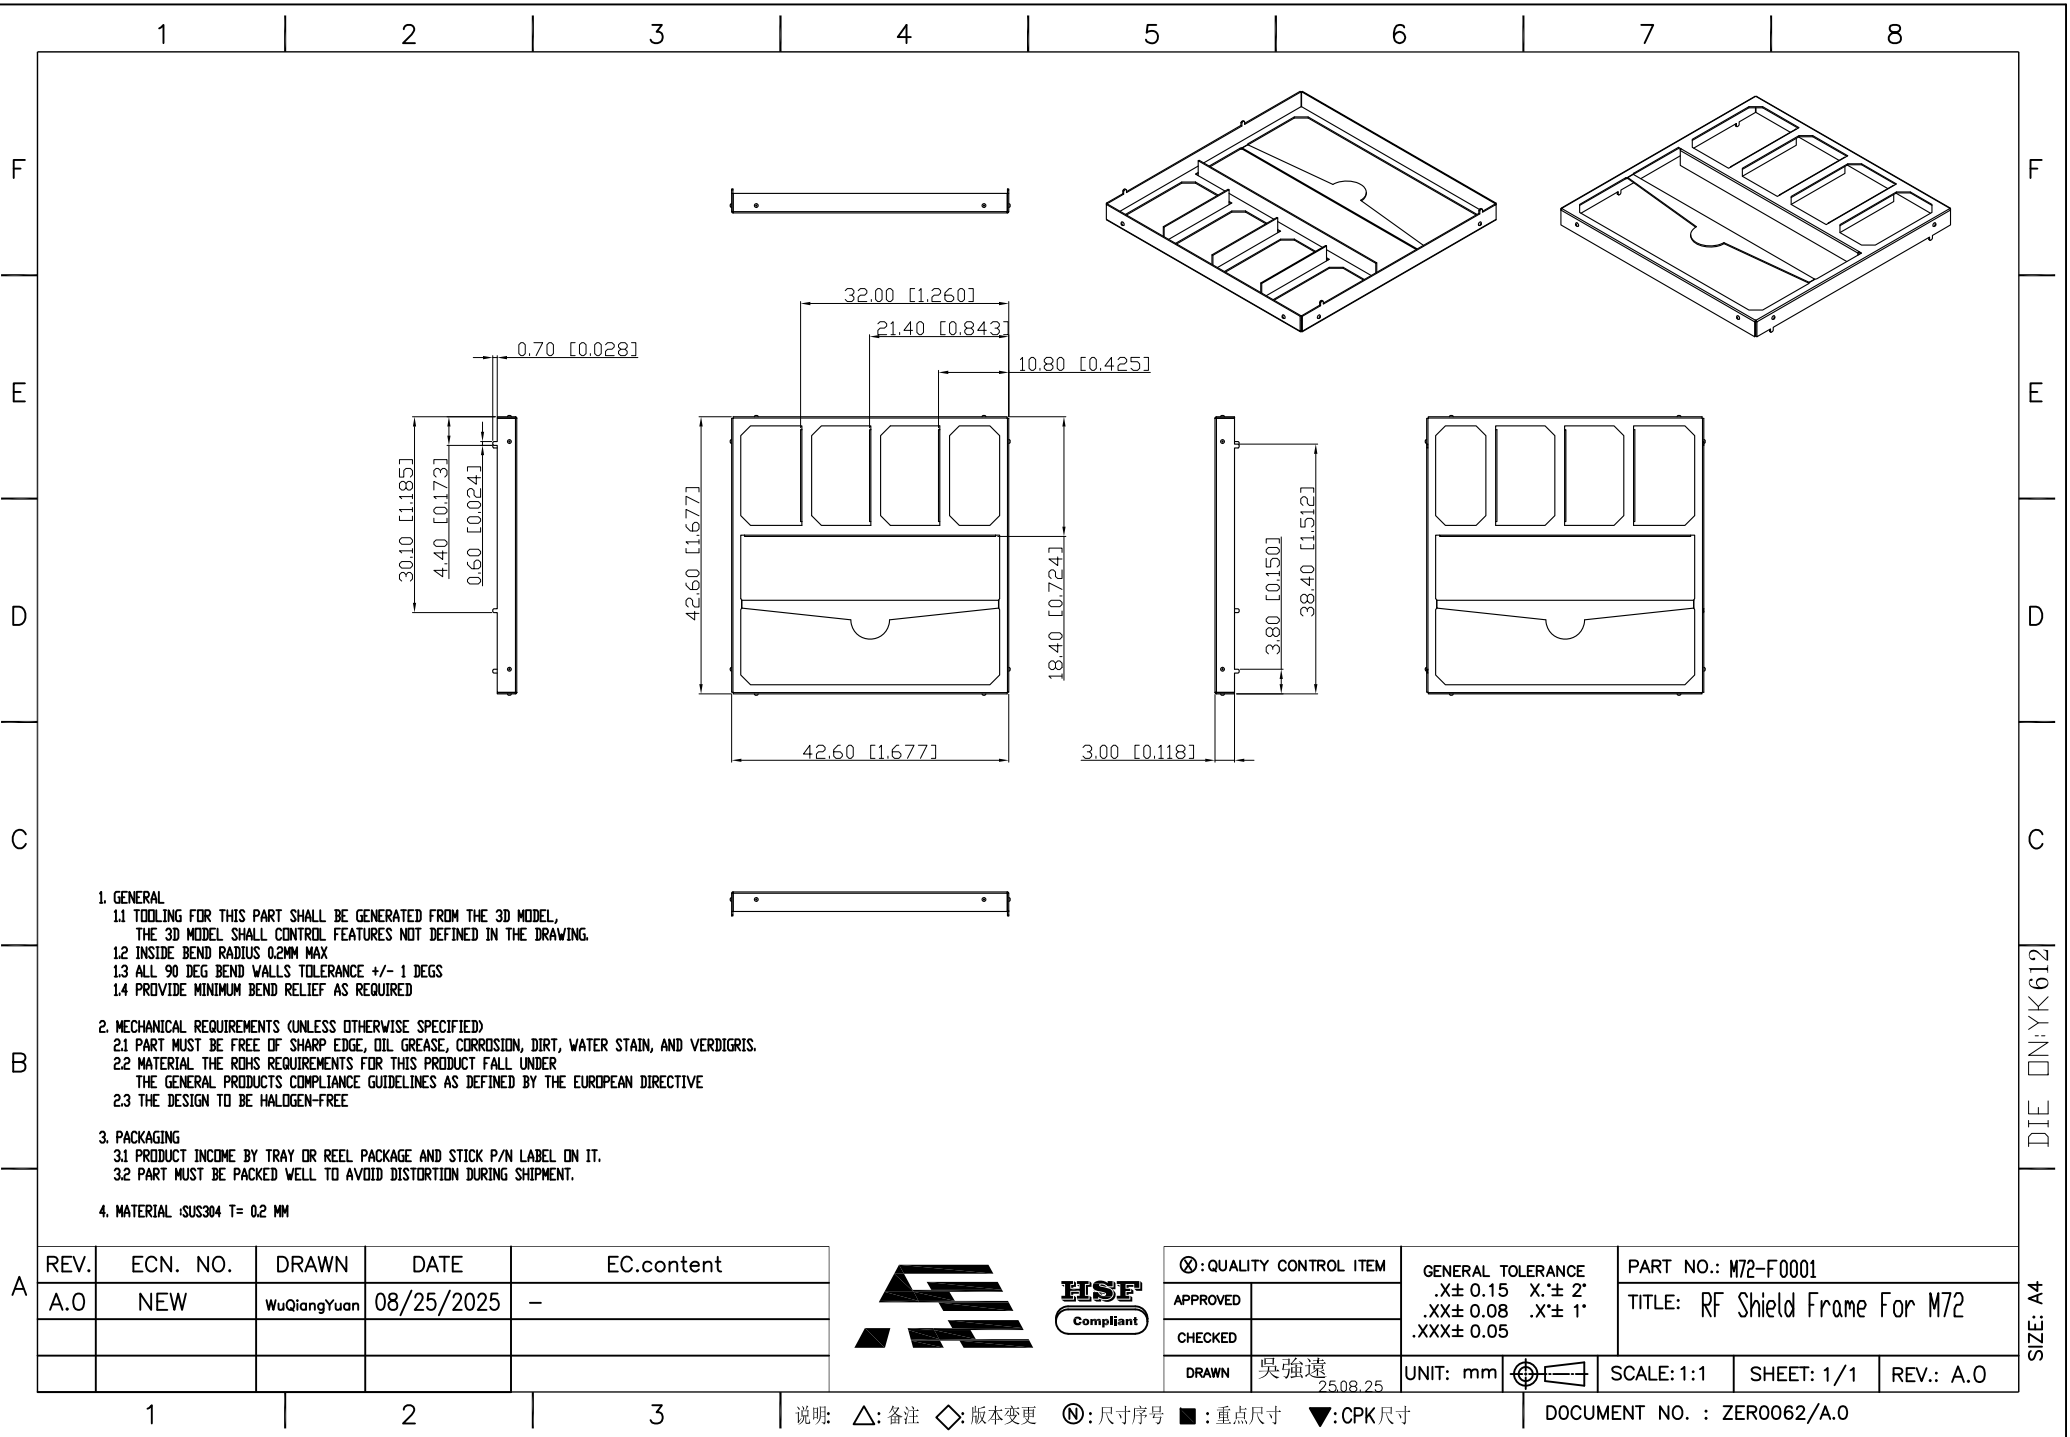

1. GENERAL
1.1 TOOLING FOR THIS PART SHALL BE GENERATED FROM THE 3D MODEL,
THE 3D MODEL SHALL CONTROL FEATURES NOT DEFINED IN THE DRAWING.
1.2 INSIDE BEND RADIUS 0.2MM MAX
1.3 ALL 90 DEG BEND WALLS TOLERANCE +/- 1 DEGS
1.4 PROVIDE MINIMUM BEND RELIEF AS REQUIRED

2. MECHANICAL REQUIREMENTS (UNLESS OTHERWISE SPECIFIED)
2.1 PART MUST BE FREE OF SHARP EDGE, OIL, GREASE, CORROSION, DIRT, WATER STAIN, AND VERDIGRIS.
2.2 MATERIAL THE ROHS REQUIREMENTS FOR THIS PRODUCT FALL UNDER
THE GENERAL PRODUCTS COMPLIANCE GUIDELINES AS DEFINED BY THE EUROPEAN DIRECTIVE
2.3 THE DESIGN TO BE HALOGEN-FREE

3. PACKAGING
3.1 PRODUCT INCOME BY TRAY OR REEL PACKAGE AND STICK P/N LABEL ON IT.
3.2 PART MUST BE PACKED WELL TO AVOID DISTORTION DURING SHIPMENT.

4. MATERIAL :SUS304 T= 0.2 MM

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	WuQiangYuan	08/25/2025	-



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: M72-F0001		
APPROVED		.X± 0.15	X.*± 2'	TITLE: RF Shield Frame For M72		
CHECKED		.XX± 0.08	.X'± 1'			
DRAWN	吳強遠	.XXX± 0.05		UNIT: mm	SCALE: 1:1	REV.: A.0
		25.08.25			SHEET: 1/1	

说明: △: 备注 ◇: 版本变更 ①: 尺寸序号 ■: 重点尺寸 ▼: CPK 尺寸

DOCUMENT NO. : ZER0062/A.0

F
E
D
C
B
A
DIE □N:YK612
SIZE: A4