









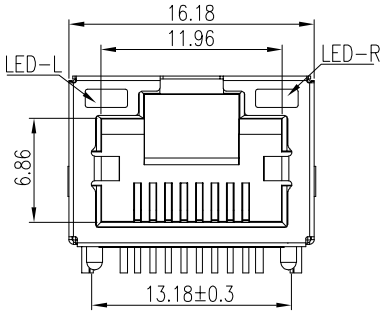







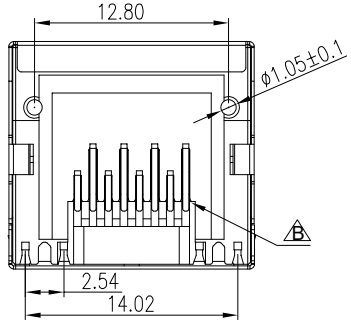

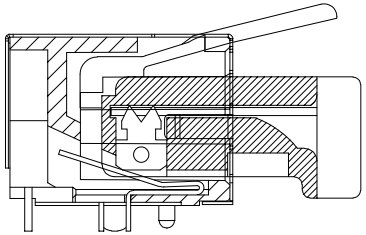

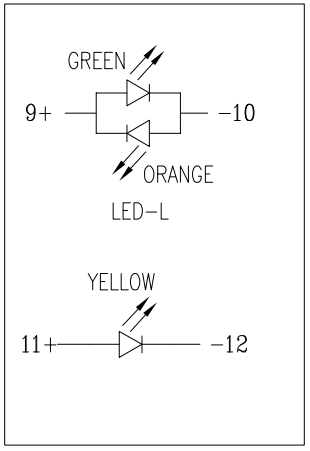

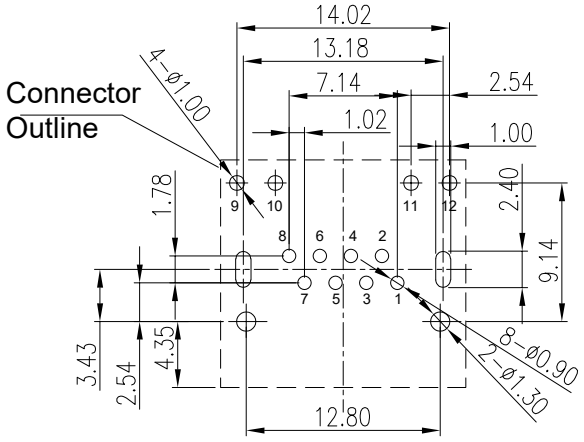

NOTES

MATERIAL
1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.
3. PLATING : Au PLATING ON CONTACT AREA, AND TIN PLATING ON SOLDER AREA OVER NICKEL.
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL
1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC STRENGTH : 500V DC RMS 50Hz. 1MIN.

MECHANICAL
1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORCE: 2.24 KG.F MAX.

ENVIRONMENTAL:
1. OPERATION : -40℃～+85℃.
2. STORAGE : -40℃～+85℃.

PART NUMBER: JT1W-C G 4 N-7 3 0 1

- G: W/O SPRING, W/O LOGO, W/O BACK LEG
- 4-Housing LCP(HF)
- N-LEFT LED:GR/OR, RIGHT LED:YELLOW
- 7-GOLD PLATED 50u" PLATING CODE
- 3-Contact PIN 1.70mm, LED Pin:1.70mm
- 0-黑色膠芯
- 1-铁壳完全

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Lumiore	9/5/2026	-

ECONN Technology
ECONN CORPORATION
HSF Compliant

APPROVED	
CHECKED	
DRAWN	

ⓧ: QUALITY CONTROL ITEM

GENERAL TOLERANCE
.X± 0.38 X.'± 2'
.XX± 0.25 .X'± 1'
.XXX± 0.13

PART NO.: JT1W-CG4N-7301
TITLE: RJ45 TAB UP内弯脚 无弹 左绿橙右黄

UNIT: mm | SCALE: 1:1 | SHEET: 1/1 | REV.: A.1

SIZE: A4

說明: ⚠備註 : 版本變更 : 尺寸序號Ⓝ : 重點尺寸 ■CPK尺寸 ▼

DOCUMENT NO. : ZER0013/A.3