
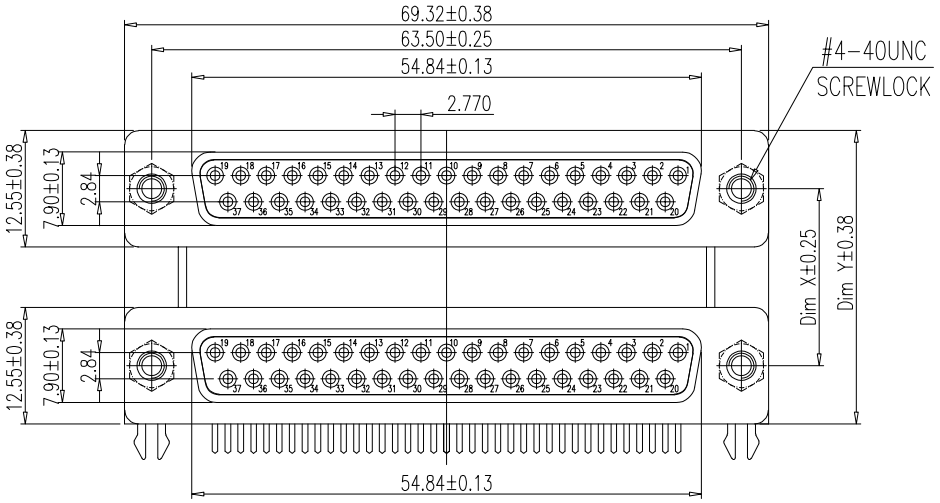
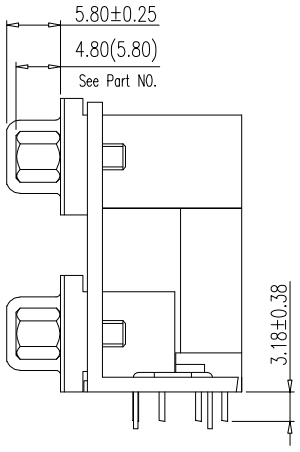
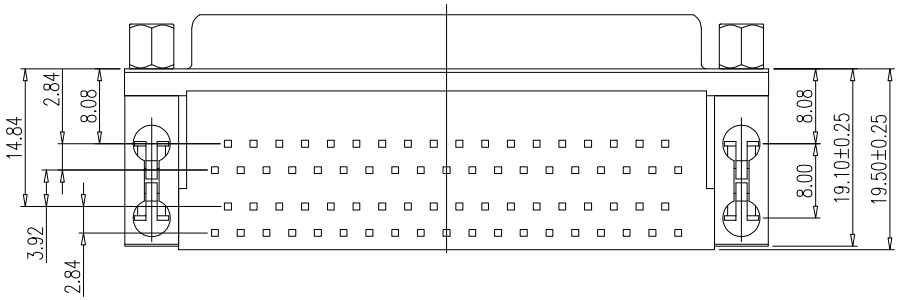



NOTE:
1.MATERIALS AND FINISHED
INSULATOR : PBT+30% GF UL 94V-0,
SHELL : STEEL, NI FINISHED
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
RIVETED INSERT: BRASS MATERIAL ,NI FINISHED
WITH #4-40 THREADED ASSEMBLED

2.ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
3.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
4.HOW TO ORDER:

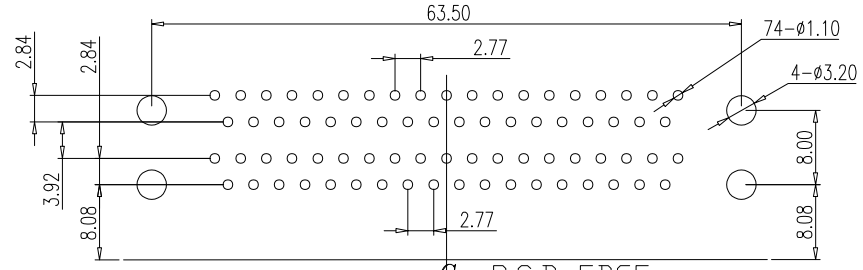


RECOMMENDED P.C.B LAYOUT

PART NUMBER:

WDF-3 0 3 3-1 0 74

F:Female

PLATING CODE
GOLD PLATED G/Fu"

Contact PIN:
74-74PIN

0:HOUSING COLOUR:BLACK

1:HOUSING PBT

| REV. | ECN. NO. | DRAWN | DATE | EC.content |
|---|---|---|---|---|
| A.0 | NEW | Lumiore | 8/25/2026 | |
| | | | | |
| | | | | |

ECONN Technology
ECONN CORPORATION

HSF Compliant

| | |
|---|---|
| ⓧ:QUALITY CONTROL ITEM | |
| APPROVED | |
| CHECKED | |
| DRAWN | |

GENERAL TOLERANCE
.X± 0.25 X.°± 2°
.XX± 0.15 .X°± 1°
.XXX± 0.10

PART NO.: WDF-3033-1074

TITLE: DR_37母对DR_37母(8.08),
铆合支架+双鱼叉(8.08*8.0)锁螺丝

UNIT: mm | SCALE: 1:1 | SHEET: 1/4 | REV.: A.0

SIZE: A4

說明: :備註 :版本變更 :尺寸序號 Ⓝ :重點尺寸 :CPK尺寸

DOCUMENT NO. : ZER0013/A.3