
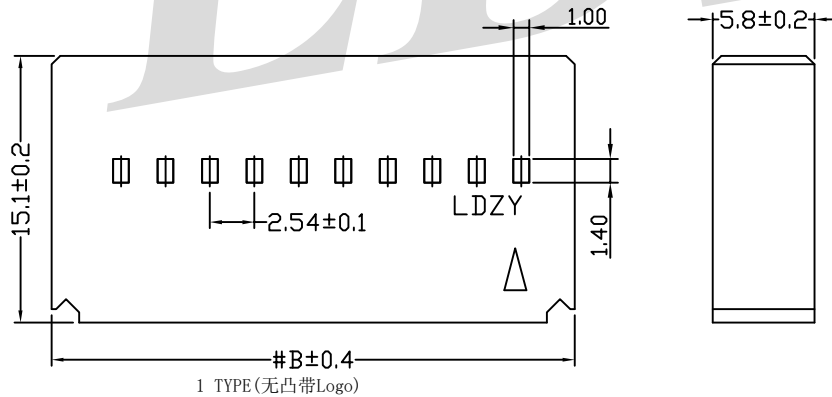
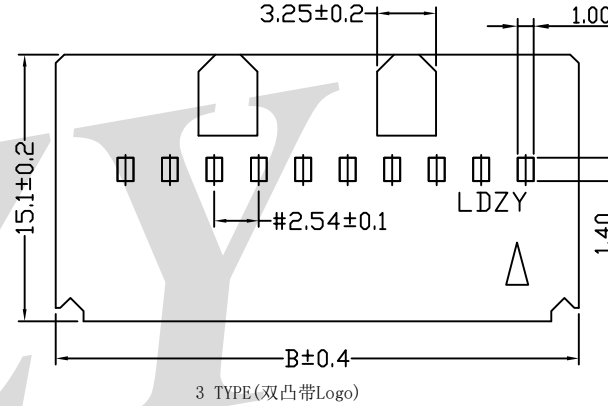
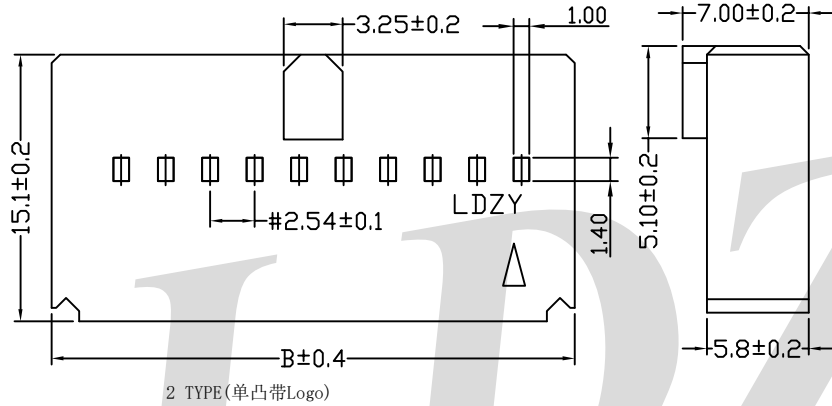
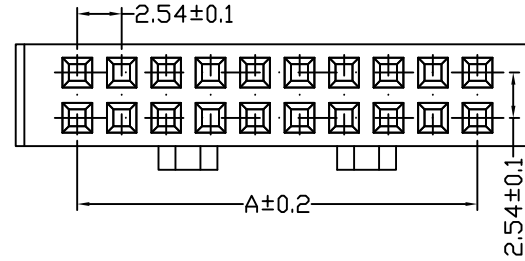


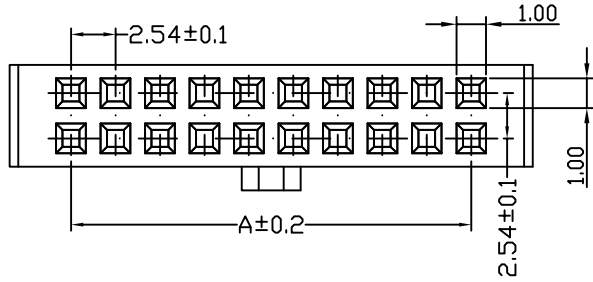

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -25°C~+85°C
- Contact resistance: Initial value/10mΩmax
- After enviornmental testing/20mΩmax

A2547 H A - 2NP - P0 BK X
① ②③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: H-Housing
③ Colloid Feature: Blank-Common, A-A TYPE
④ Pin No.: 204-2*02PIN 264-20*32PIN.
⑤ Material: P0-PBT, UL94V-0;
⑥ Color: BK-Black,
⑦ Option: 1-1 TYPE (无凸带Logo); 2-2 TYPE (单凸带Logo)
3-3 TYPE (双凸带Logo);

Poles	Part No	Dimensions (mm)	
		A	B
2	A2547HA-2*02P	2.54	9.54
3	A2547HA-2*03P	5.08	12.08
4	A2547HA-2*04P	7.62	14.62
5	A2547HA-2*05P	10.16	17.16
6	A2547HA-2*06P	12.70	19.70
7	A2547HA-2*07P	15.24	22.24
8	A2547HA-2*08P	17.78	24.78
9	A2547HA-2*09P	20.32	27.32
10	A2547HA-2*10P	22.86	29.86
11	A2547HA-2*11P	25.40	32.40
12	A2547HA-2*12P	27.94	34.94
13	A2547HA-2*13P	30.48	37.48
14	A2547HA-2*14P	33.02	40.02
15	A2547HA-2*15P	35.56	42.56
16	A2547HA-2*16P	38.10	45.10
17	A2547HA-2*17P	40.64	47.64
18	A2547HA-2*18P	43.18	50.18
19	A2547HA-2*19P	45.72	52.72
20	A2547HA-2*20P	48.26	55.26
21	A2547HA-2*21P	50.80	57.60
22	A2547HA-2*22P	53.34	60.34
23	A2547HA-2*23P	55.88	62.88
24	A2547HA-2*24P	58.42	65.42
25	A2547HA-2*25P	60.96	67.96
26	A2547HA-2*26P	63.50	70.50
27	A2547HA-2*27P	66.04	73.04
28	A2547HA-2*28P	68.58	75.58
29	A2547HA-2*29P	71.12	78.12
30	A2547HA-2*30P	73.66	80.66
31	A2547HA-2*31P	76.20	83.20
32	A2547HA-2*32P	78.74	85.74

						一般公差 GENERAL TOLERANCE . X ±0.3 . XX ±0.2 . XXX ±0.1	LDZY® Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A2547HA-2NP-POBKX			
											品名 TITLE 2.5mm Crimp Style connectors			
2016/12/16	A	B	修改图框格式及添加料号描述					核准 APPD	审核 CHK	绘图 DR	日期 DATA			
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	Rodney	兰 雄	LCE	2010/11/10	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8801	版次 REV B