
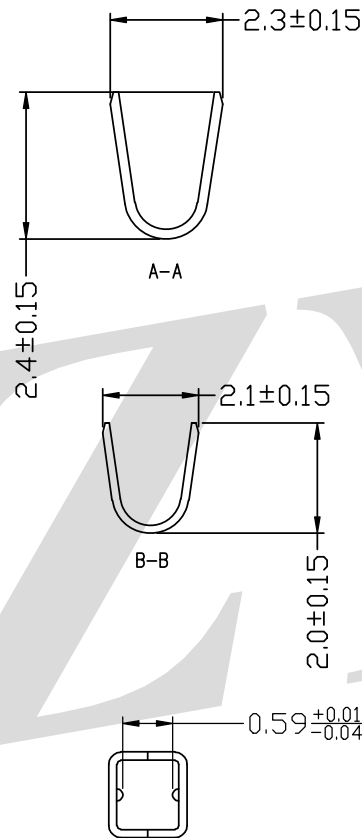


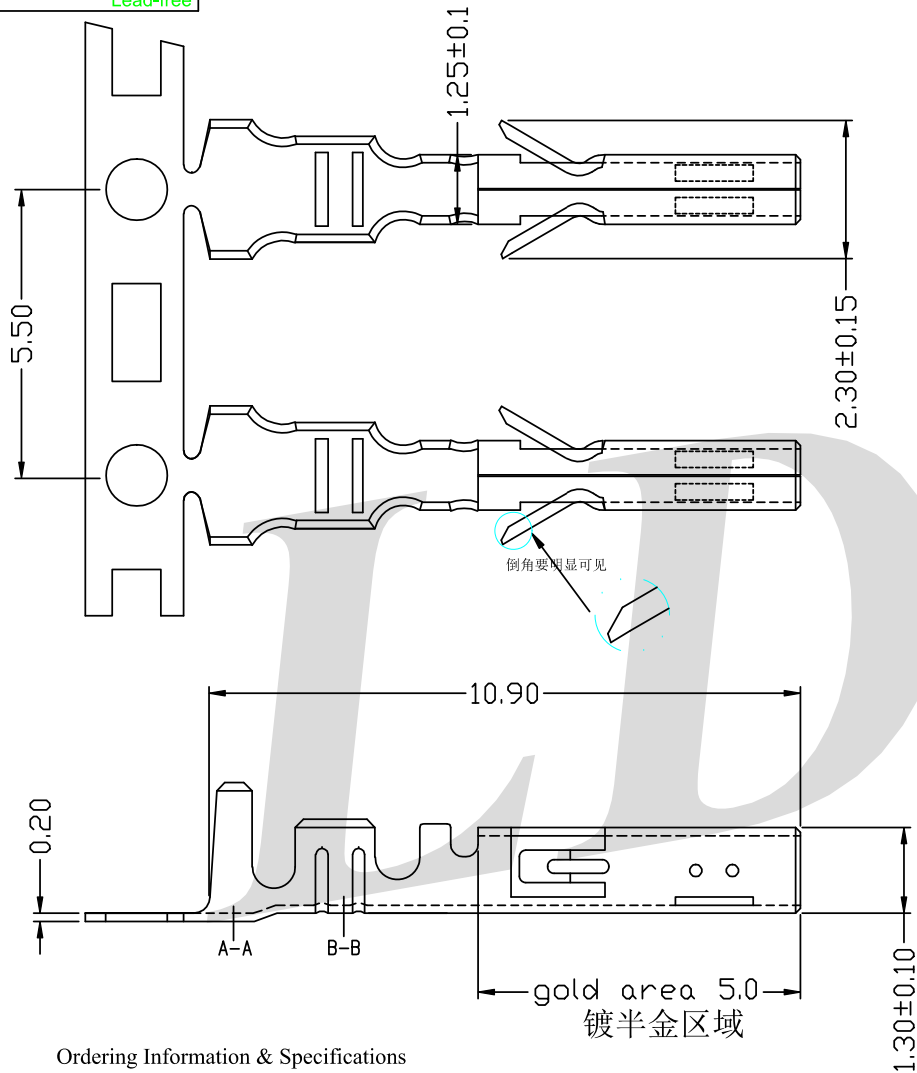

■ SPECIFICATIONS :


- Voltage Rating: 250V AC / DC
- Current Rating: 5A AC / DC
- Withstanding Voltage: 1500V AC/minute
- Temperature Range: -25C°~+85C°
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20MΩ Max.
- *Mates with LDZY C3030HF series Housing

■ *Material:

Terminal: Phosphor Bronze
Plating: Tin Plated Or Gold Flash
Or Contact Gold Flash Bottom Nickel


C3030 T F - P XX -A-L
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.:
- ② Category: T- Terminal
- ③ Terminal Type: F-mate with male housing
- ④ Material: P-Phosphor Bronze, B-Brass ,
- ⑤ Plating : G1-Gold Flash, T1- Tin Plated
GT- Contact Gold Flash Bottom Nickel(镀半金)
- ⑥ Other Types: A-A Type(新模)
- ⑦ Other Types: L-L Type(无LOGO)

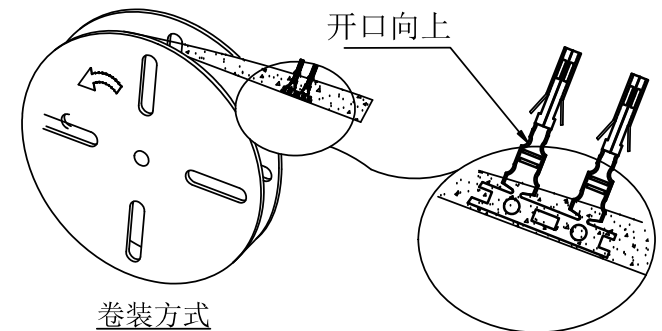

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C3030TF-PG1-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	gold flash	10,000pcs
C3030TF-PT1-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	Tin Plated	10,000pcs
C3030TF-PGT-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	Contact Gold Flash Bottom Nickel	10,000pcs

						一般公差 GENERAL TOLERANCE	LDZY® 东莞市蓝雁电子有限公司 Electro DongGuan LDZY Electronics CO.,LTD.				料号 PART NO C3030TF-PXX-A-L			
						. X ±0.30	核准 APPD 审核 CHK 绘图 DR 日期 DATA				品名 TITLE 3.0mm Crimp Style connectors			
						. XX ±0.20	核装 APPD 审核 CHK 绘图 DR 日期 DATA				单位 UNIT 比例 SCALE 图号 NUMBER 版次 REV			
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	周立鸿	兰 雄	唐文舜	2021/05/24	MM	1/1	LDZY-8803	A
						. XXX ±0.10								