
RoHS Lead-free

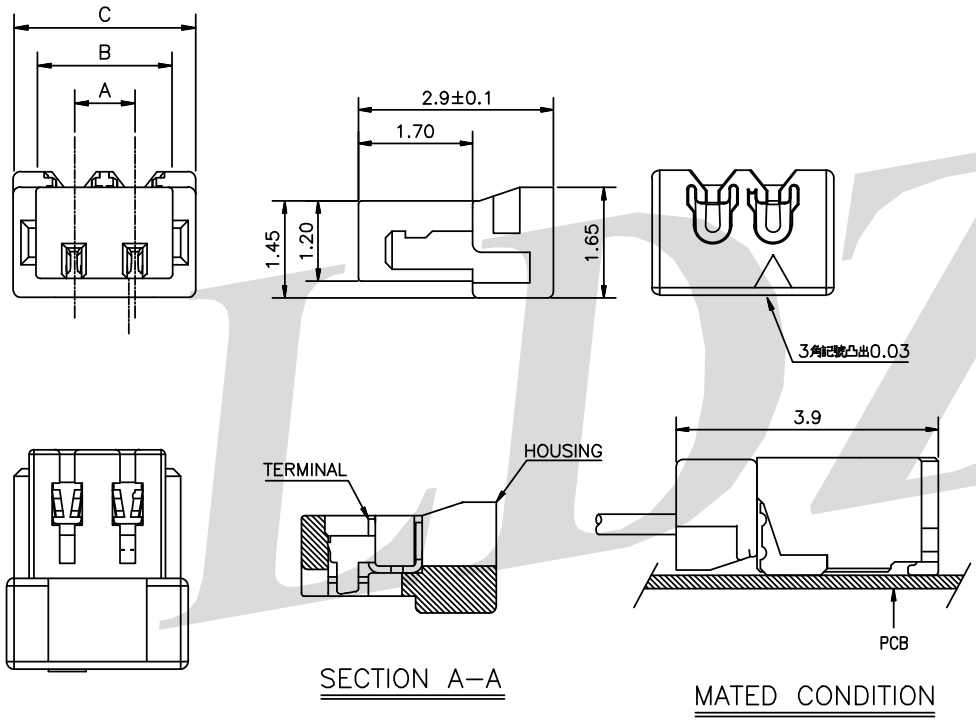


SPECIFICATIONS :
Voltage Rating：30V AC / DC
Current Rating： 0.5A AC / DC
Withstanding Voltage：200V AC/minute
Temperature Range：-25°C~+85°C
Insulation Resistance：100MΩ Min.
Contact Resistance：20mΩ Max.
*Mates with LDZY A0800 series Wafer

Material：
Housing: PA66,UL94V-0
Color：Natural/Beige
Contacts: Phosphor bronze/Gold-plated

A0800 H I X - NP - N0 XX G
① ②③④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category：H-Housing
③ Housing Type：Blank-Common，I-Prick Housing, F-Female Housing, M-Male Housing，
④ Colloid Feature：Blank-Common，A-A TYPE ...
⑤ Pin No.：02-02PIN,03-03PIN...
⑥ Material：N0-PA66,UL94V-0.
⑦ Color：NA-Natural,BG-Beige.
⑧ Plating Specification：T-Tin Plated, G-Gold-plated .

## Ordering Information & Dimensions

| Poles | Dimensions (mm) | | |
|---|---|---|---|
| | A | B | C |
| 2 | 0.80 | 1.80 | 2.40 |
| 3 | 1.60 | 2.60 | 3.20 |
| 4 | 2.40 | 3.40 | 4.00 |
| 5 | 3.20 | 4.20 | 4.80 |
| 6 | 4.00 | 5.00 | 5.60 |
| 7 | 4.80 | 5.80 | 6.40 |
| 8 | 5.60 | 6.60 | 7.20 |
| 9 | 6.40 | 7.40 | 8.00 |
| 10 | 7.20 | 8.20 | 8.80 |
| 12 | 8.80 | 9.80 | 10.40 |
| 14 | 10.40 | 11.40 | 12.00 |
| 16 | 12.00 | 13.00 | 13.60 |
| 20 | 15.20 | 16.20 | 16.80 |

| | | | | | | 一般公差 GENERAL TOLERANCE | 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD. | | | | 料号 PART NO A0800HI-NP-N0XXG | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | .X ±0.3 | | | | | 品名 TITLE 0.80mm Pitch Single Row Housing | | | |
| 2022/8/19 | A | B | 依照实物修正图纸外观 | | | .XX ±0.2 | 核准 APPD | 审核 CHK | 绘图 DR | 日期 DATE | | | | |
| 日期 DATE | 旧版次 OLD REV | 新版次 NEW REV | 变更内容 DESCRIPTION | 审核 CHK | 核准 APPD | .XXX ±0.1 角法 PROJECT | Rodney | 兰 雄 | Lce | 2024-12-02 | 单位 UNIT MM | 比例 SCALE 1/1 | 图号 NUMBER LDZY-81080 | 版次 REV B |