
RoHS Pb Lead-free

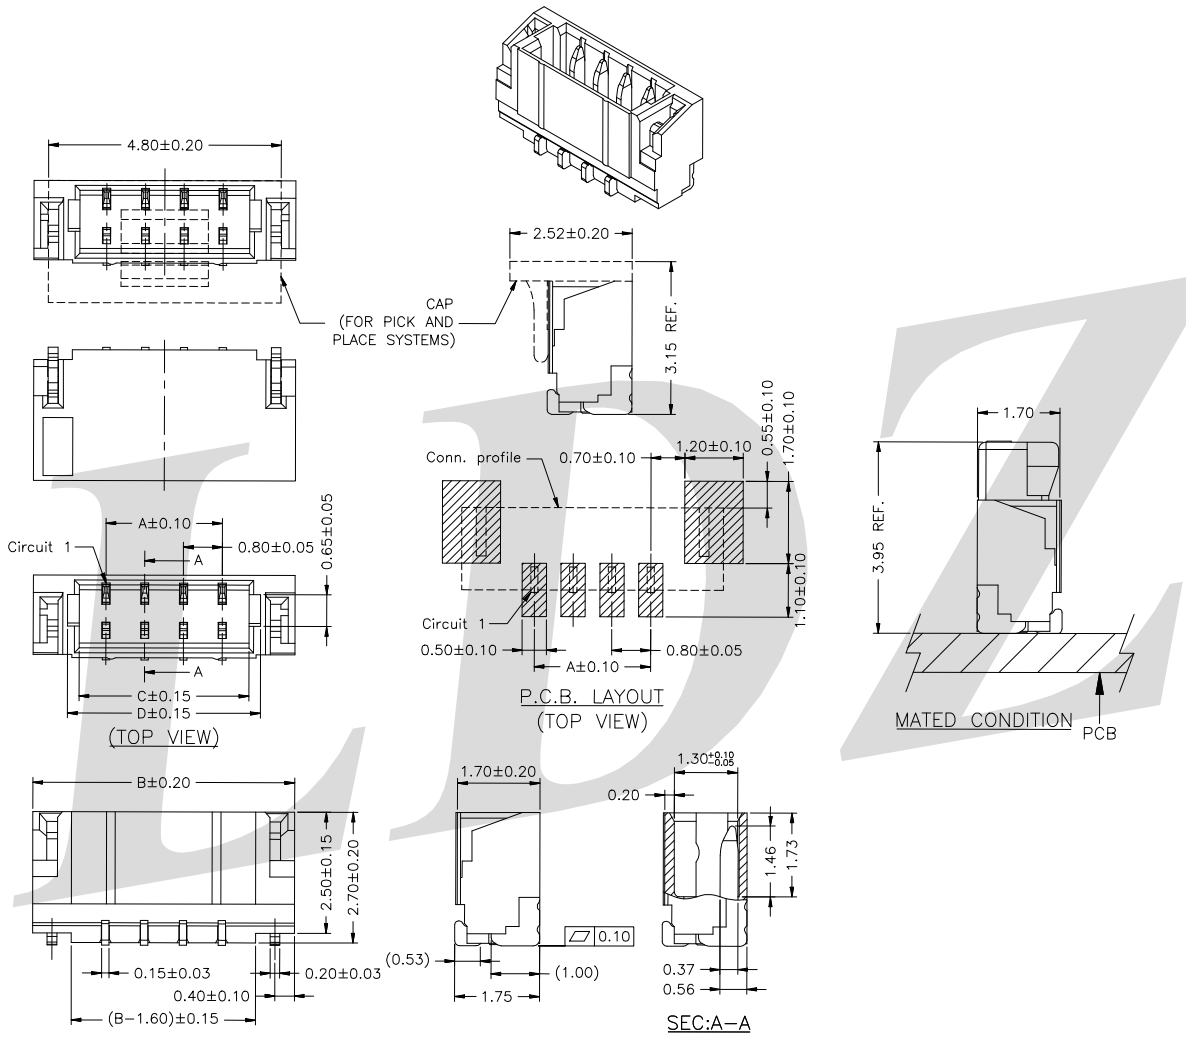


## ■ Specification

- Voltage Rating : 30V AC/DC
- Current Rating : 0.7A AC/DC
- Withstanding Voltage : 200V AC /minute
- Insulation Resistance : ≥100MΩ min
- Temperature Range : -25℃ to + 85 ℃
- Contact Resistance : ≤20mΩ
- After Environmental Testing: ≤40mΩ

A0800 W V S- NP - L0 BG G - D
① ②③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.
② Category:W-wafer
③ Welding Board Angle: V- Straight 180° ,
④ Soldering Type: S-SMT Type,
⑤ Circuit No.: 02-2PIN, 03-3PIN ...20-20PIN
⑥ Material: L0-LCP,UL94V-0;
⑦ Color: BG-Beige,
⑧ Plating Method: G-Gold flash
⑨ Other:D-LDZY-8180

## Ordering Information & Dimensions

| Poles | Dimensions(mm) | | | |
|---|---|---|---|---|
| | A | B | C | D |
| 2 | 0.80 | 3.80 | 1.90 | 2.38 |
| 3 | 1.60 | 4.60 | 2.70 | 3.18 |
| 4 | 2.40 | 5.40 | 3.50 | 3.98 |
| 5 | 3.20 | 6.20 | 4.30 | 4.78 |
| 6 | 4.00 | 7.00 | 5.10 | 5.58 |
| 7 | 4.80 | 7.80 | 5.90 | 6.38 |
| 8 | 5.60 | 8.60 | 6.70 | 7.18 |
| 9 | 6.40 | 9.40 | 7.50 | 7.98 |
| 10 | 7.20 | 10.20 | 8.30 | 8.78 |
| 11 | 8.00 | 11.00 | 9.10 | 9.58 |
| 12 | 8.80 | 11.80 | 9.90 | 10.38 |
| 13 | 9.60 | 12.60 | 10.70 | 11.18 |
| 14 | 10.40 | 13.40 | 11.50 | 11.98 |
| 15 | 11.20 | 14.20 | 12.30 | 12.78 |
| 16 | 12.00 | 15.00 | 13.10 | 13.58 |
| 17 | 12.80 | 15.80 | 13.90 | 14.38 |
| 18 | 13.60 | 16.60 | 14.70 | 15.18 |
| 19 | 14.40 | 17.40 | 15.50 | 15.98 |
| 20 | 15.20 | 18.20 | 16.30 | 16.78 |

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1 | LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD. | | | | 料号 PART NO A0800WVS-NP-L0BGG-D |
| | | | | | | | | | | | 品名 TITLE 0.8mm Crimp Style Connectors |
| 2022/10/14 | A | A1 | 增加电镀规格 | | | | 核准 APPD | 审核 CHK | 绘图 DR | 日期 DATA | |
| 日期 DATE | 旧版次 OLD REV | 新版次 NEW REV | 变更内容 DESCRIPTION | 审核 CHK | 核准 APPD | 角法 PROJECT | Rodney | 兰 雄 | 潘昌文 | 2023/04/04 | 单位 UNIT mm / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8180 / 版次 REV A1 |