



RoHS Pb Lead-free

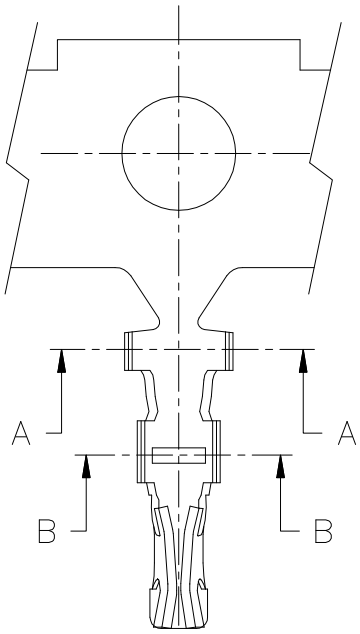




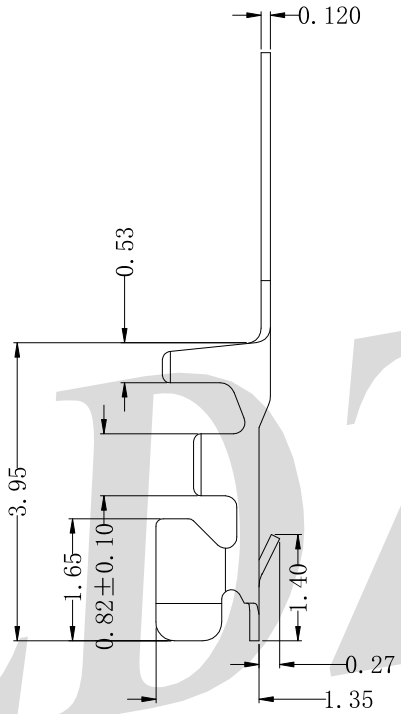



SEC:A—A



SEC:B—B

■ SPECIFICATIONS :

- Voltage Rating：50V AC / DC
- Current Rating： 1A AC / DC
- Withstanding Voltage：500V AC/minute
- Temperature Range：-25°C~+85°C
- Insulation Resistance：100MΩ Min.
- Contact Resistance：20mΩ Max.
- *Suitable LDZY A1001 series Housing


■ *Material:

Terminal: Phosphor Bronze

Plating： Tin Plated Or Gold Flash,

A1001 T F - P XX
① ② ③ ④

① Series No.
② Termianl Type：TF-Mate with male housing
③ Material：P-Phosphor Bronze
④ Plating Specification：T1-Tin Plated G1-Gold flash

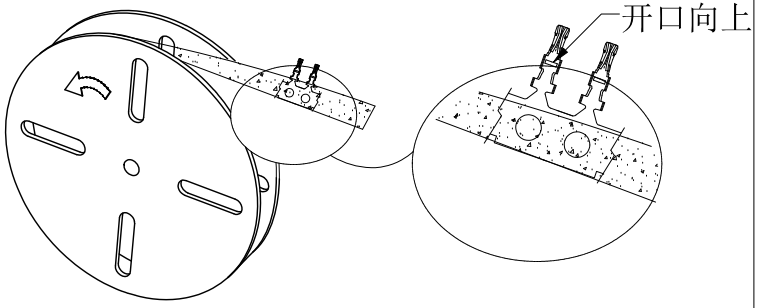

卷装方式

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1001TF-PT1	AWG#28-#32	0.8mm(max)	Phosphor Bronze	Tin Plated	20,000pcs
A1001TF-PG1	AWG#28-#32	0.8mm(max)	Phosphor Bronze	Gold Flash,	20,000pcs

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1

角法 PROJECT

LDZY® Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATE
周立鸿	兰 雄	陆 波	2014/10/17

料号 PART NO: A1001TF-PXX

品名 TITLE: 1.00mm Pitch Terminal

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/1	LDZY-8801	A

LDZY