


RoHS Pb Lead-free

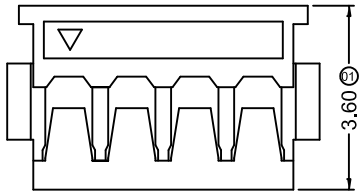


2~5Pin Shape

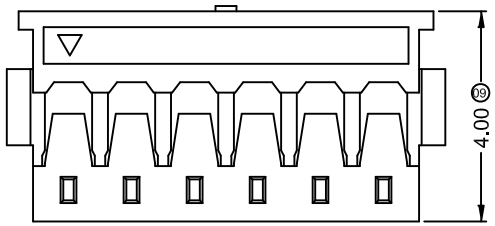


6Pin Shape

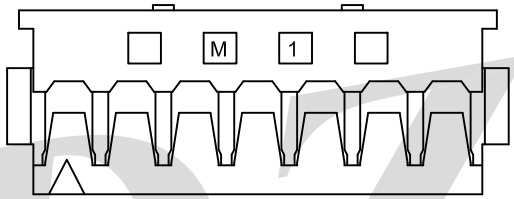



7Pin Shape




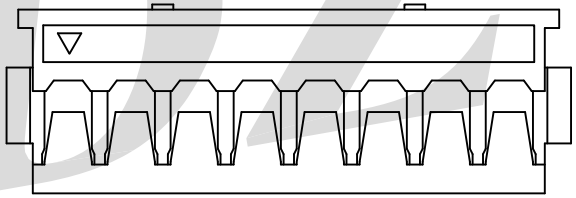

8~10Pin Shape

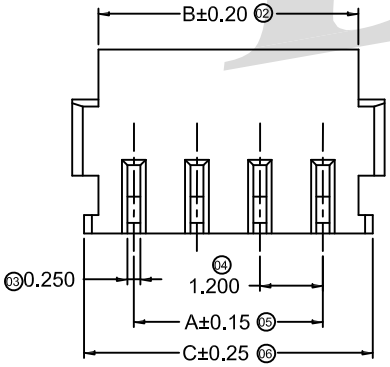





3D View

SPECIFICATIONS :

Voltage Rating：50V AC / DC
Current Rating：1A AC / DC
Withstanding Voltage：500V AC/minute
Temperature Range：-25°C~+85°C
Insulation Resistance：100MΩ Min.
Contact Resistance：20mΩ Max.
After environmental testing：40mΩ Max.
*Suitable LDZY A1201 series Terminal
*Mates with LDZY A1201 series Wafer
Material：LCP, UL94V-0
Color：Black

A1201 H X X - NP - L0 BK 0
① ②③④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category：H-Housing
③ Housing Type：Blank-Common，
F-Female Housing，M-Male Housing，
④ Colloid Feature：Blank-Common，A-A TYPE ...
⑤ Circuit No.:02~15PIN
⑥ Material：L0-LCP, UL94V-0
⑦ Color：BK-Black,
⑧ Option：0-0 TYPE

	Poles	Dimensions(mm)		
		A	B	C
	02	1.20	2.60	3.10
	03	2.40	3.80	4.30
	04	3.60	5.00	5.50
	05	4.80	6.20	6.70
	06	6.00	7.40	7.90
	07	7.20	8.60	9.10
B	08	8.40	9.80	10.30
B	09	9.60	11.00	11.50
B	10	10.80	12.20	12.70

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1201H-NP-L0BK0
											品名 TITLE 1.20mm Pitch Housing
2018/04/14	A	B	NEW 8,9,10Pin specifications				核准 APPD	审核 CHK	绘图 DR	日期 DATA	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰 雄	唐文舜	2018/04/14	单位 UNIT mm / 比例 SCALE 1/1 / 图号 NUMBER LDZY-81001 / 版次 REV B