


RoHS Pb Lead-free

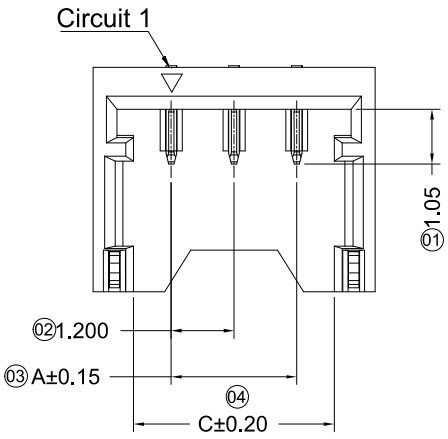

2-3 Pin
Without Sticking Point

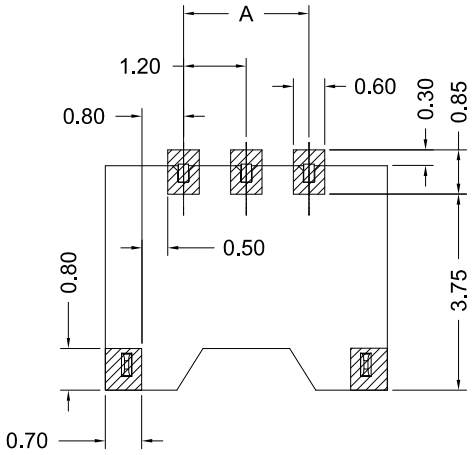

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



3D View


■ **Specification**


Voltage Rating : 50V AC/DC
Current Rating : 2A AC/DC
Withstanding Voltage : 500V AC /minute
Insulation Resistance : 100MΩ min
Temperature Range : -40°C~+105°C
Contact Resistance : ＜20mΩ
After Environmental Testing: ≤40mΩ
Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max

Reference Informations:
*Material:
PIN: Phosphor Bronze, Gold-Flash
Ground lug:Phosphor Bronze,Matte Tin Plated,

Wafer: PA4T,UL94V-0, Color: Black
*Q'TY: REEL
*Mates with LDZY A1201 series Housing

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.20	4.20	2.64	03	2.40	5.40	3.84

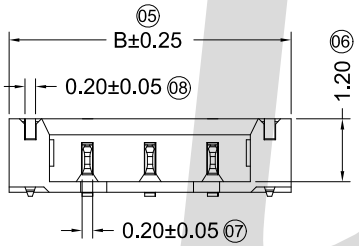

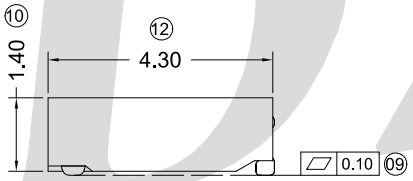

A1201 W R X S - NP - 4T BK G
① ②③④⑤ ⑥ ⑦ ⑧ ⑨

① Series No.
② Category：W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Colloid Feature：Blank-Common, A-. . .
⑤ Welding Way：S-SMT Type;
⑥ Circuit No.：02-2PIN,
⑦ Material：4T-PA4T,UL94V-0;
⑧ Color：BK-Black
⑨ Plating Method：G-Gold-Flash,

LDZY

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY Electronics® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1201WRS-NP-4TBKG
							核准 APPD	审核 CHK	绘图 DR	日期 DATA	品名 TITLE 1.2mm Crimp Style Connectors
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT			2023/3/23	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8951	版次 REV A