


RoHS Pb
Lead-free

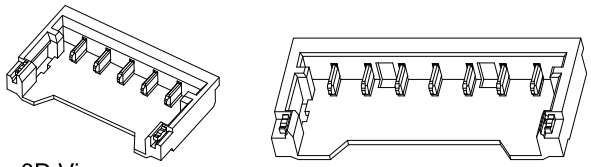


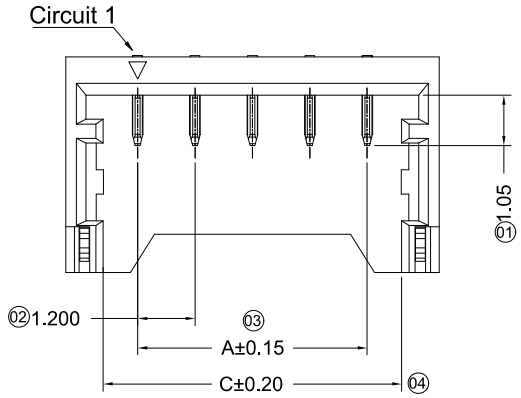



4-5Pin
Without Sticking Point

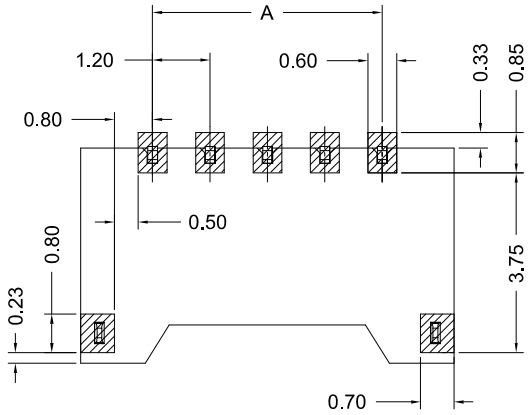


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

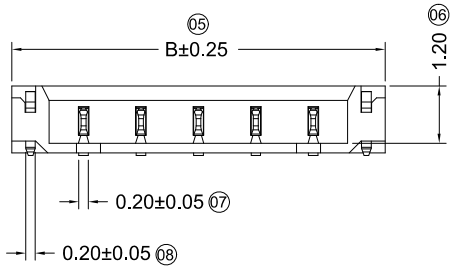

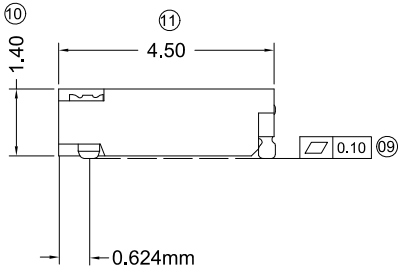



6P With Sticking Point
Scale 1:1



7 P With Sticking Point
Scale 1:1

■ Specification

Voltage Rating : 50V AC/DC
Current Rating : 2A AC/DC
Withstanding Voltage : 500V AC /minute
Insulation Resistance : 100MΩ min
Temperature Range : -40°C~+105°C
Contact Resistance : ＜20mΩ
After Environmental Testing: ≤40mΩ
Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max

Reference Informations:
*Material:
PIN: Phosphor Bronze, Gold-Flash
Ground lug:Phosphor Bronze,Matte Tin Plated,

Wafer: PA4T,UL94V-0, Color: Black
*Q'TY: REEL
*Mates with LDZY A1201 series Housing

Poles	Dimensions(mm)		
	A	B	C
04	3.60	6.60	5.04
05	4.80	7.80	6.24
06	6.00	9.00	7.44
07	7.20	10.20	8.64

A1201 W R X S - NP - XX BK G
① ②③④⑤ ⑥ ⑦⑧⑨

① Series No.
② Category：W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Colloid Feature：Blank-Common, A-. . .
⑤ Welding Way：S-SMT Type;
⑥ Circuit No.：02-2PIN,
⑦ Material：4T-PA4T,UL94V-0
⑧ Color：BK-Black
⑨ Plating Method： G-Gold-Flash

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
角法 PROJECT

LDZY Electronics 东莞市蓝雁电子有限公司
DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATA
			2023/03/21

料号 PART NO
A1201WRS-NP-XXBKG

品名 TITLE
1.2mm Crimp Style Connectors

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/1	LDZY-8951	A