



RoHS Pb Lead-free

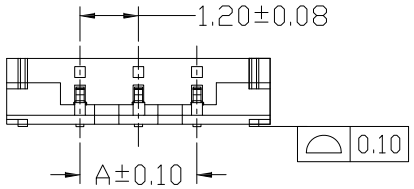





剖面 A-A

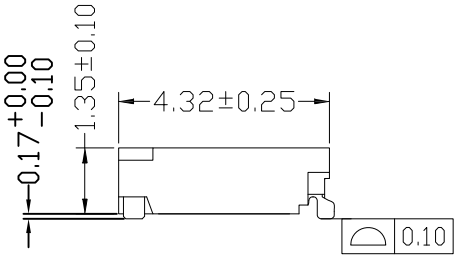

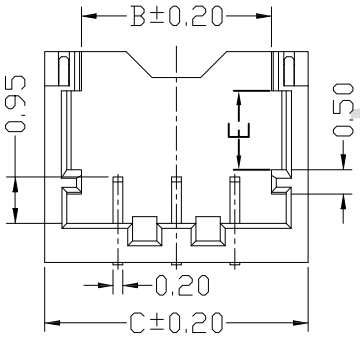


3P

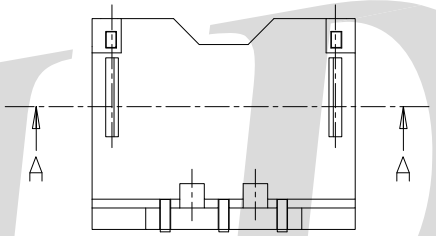

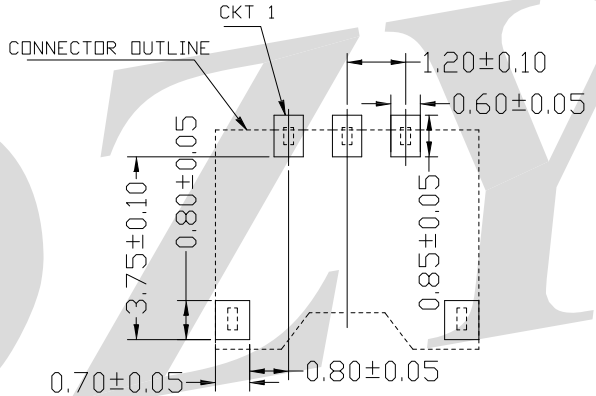

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



2P

■ Specifications

- Voltage Rating: 50V AC/ DC
- Current Rating: 2A AC/DC
- Withstanding Voltage: 500V AC/Minute
- Insulation Resistance:100MΩ Min.
- Temperature Range: -25°C~+85°C
- Contack Resistance: 20mΩ Max.
- After enviornmetntal testing:20mΩ Max.

*Mates with LDZY A1203 series Housing

Material:
Wafer: PA6T UL94V-0,
Color: Natural
Conductor: Phosphor Bronze/Gold Plated
Solder Ear: Phosphor Bronze/Tin Plated

A1203 W R S - NP - 6T NA G
① ②③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Welding Way: S-SMT Type;
⑤ Circuit No.: 02-2PIN,
⑥ Material: 6T-PA6T,UL94V-0
⑦ Color: NA-Natural
⑧ Plating Method: G-Gold Plated,

Poles	Dimensions(mm)				
	A	B	C	D	E
02	1.20	2.70	4.20	3.20	1.50
03	2.40	3.90	5.40	4.40	1.50

LDZY

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1203WRS-NP-6TNAG
											品名 TITLE 1.20mm Crimp Style connectors
2018/10/05	A	B	变更胶壳材质和取消耳扣凸台(材质有LCP变更PA6T)				核准 APPD	审核 CHK	绘图 DR	日期 DATA	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	Rodney	兰 雄	杨胜	2018/10/05	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8802 / 版次 REV B