
RoHS Pb Lead-free

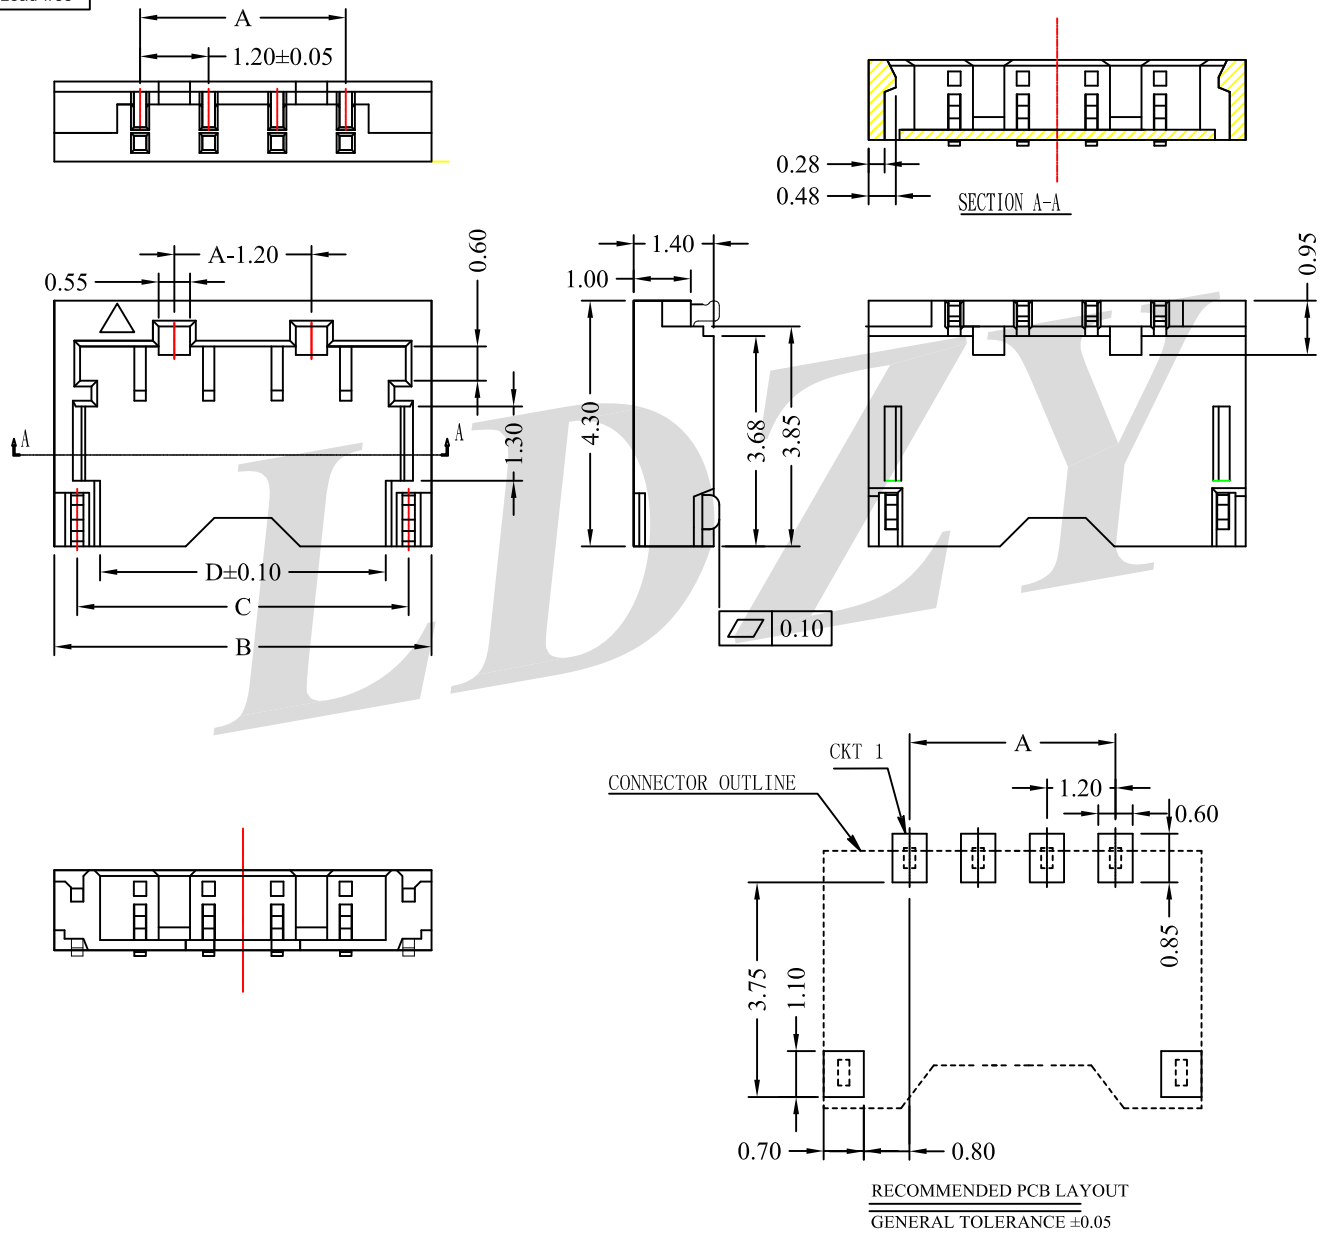

■ Specifications

- Voltage Rating: 50V AC/ DC
- Current Rating: 2A AC/DC
- Withstanding Voltage: 500V AC/Minute
- Insulation Resistance:100MΩ Min.
- Temperature Range: -25° C~+85° C
- Contack Resistance: 20mΩ Max.
- After enviornmetntal testing:20mΩ Max.

*Mates with LDZY A1203 series Housing

Material:

Wafer: LCP UL94V-0,
Color: Natural
Conductor: Phosphor Bronze/Gold Plated
Solder Ear: Phosphor Bronze/Tin Plated

A1203 W R S - NP - L0 NA G
① ②③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Welding Way: S-SMT Type;
⑤ Circuit No.: 02-2PIN,
⑥ Material: L0-LCP,UL94V-0
⑦ Color: NA-Natural
⑧ Plating Method: G-Gold Plated,

Circuits	Dimensions			
	A	B	C	D
4P	3.60	6.60	5.80	5.00
5P	4.80	7.80	7.00	6.20
6P	6.00	9.00	8.20	7.40

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1
角法 PROJECT

LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATA
周立鸿	兰 雄	唐文舜	2019/08/14

料号 PART NO: A1203WRS-NP-L0NAG

品名 TITLE: 1.20mm Crimp Style connectors

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/1	LDZY-8802	A