
RoHS Pb Lead-free

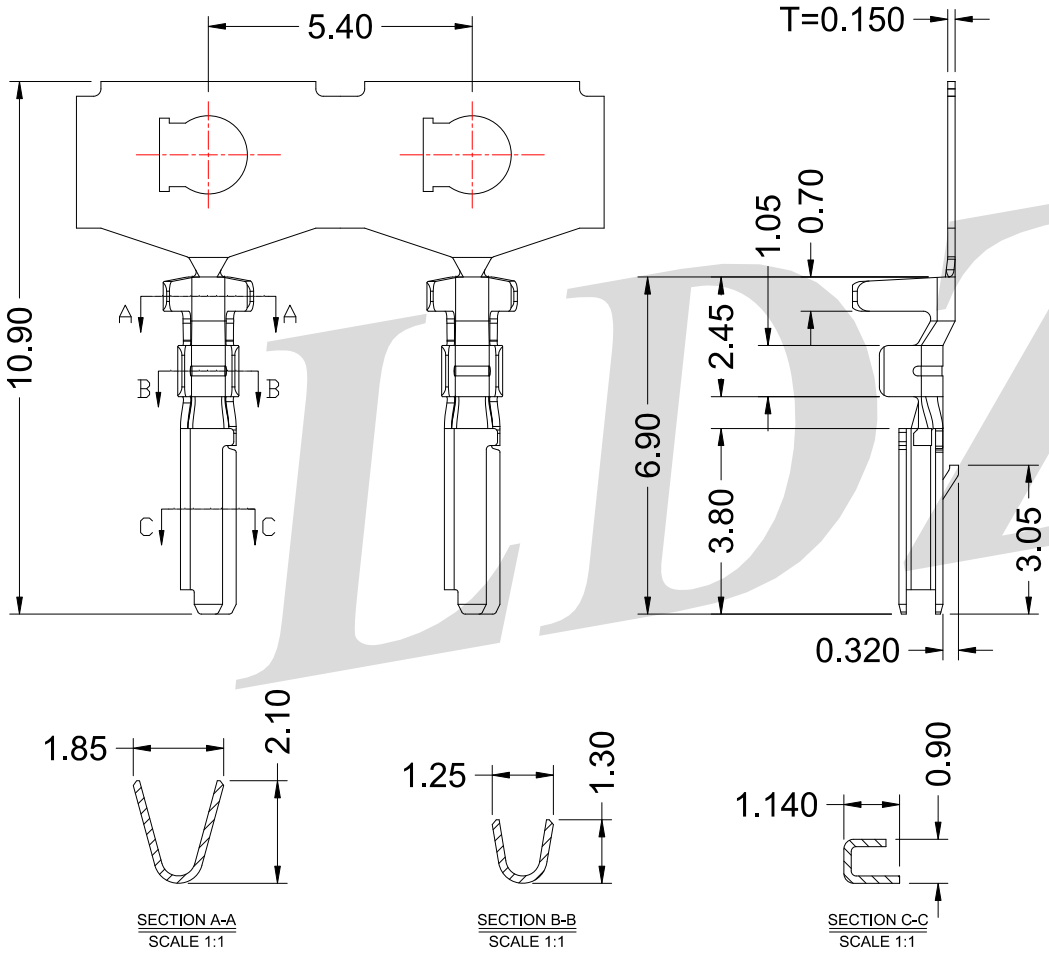


■ Specifications :

- Voltage Rating: 100V AC / DC
- Current Rating: 2A AC / DC
- Withstanding Voltage: 500V AC/Minute
- Temperature Range: -40°C~+105°C
- Insulation Resistance: 500MΩ/Min
- Contact Resistance: 20mΩ/Max
- Wire Range：AWG#24-#26
- Insulation O.D.:1.28mm(Max)
- Used in A1502H series Housing

A1502 TF - P XX
① ② ③ ④

① Series No.
② Termianl Type：TM-mate with female housing
TF-Mate with male housing
TW-WAFER mate with wafer
③ Material：P-Phosphor bronze
④ Plating Specification：T1-Tin Plated G1-Gold flash
GT-Contact Gold Flash Bottom Nickel



LDZY

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
角法 PROJECT

LDZY® Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATE
周立鸿	兰 雄	罗吉康	2023/11/03

料号 PART NO: A1502TF-PXX
品名 TITLE: 1.50mm Pitch Terminal

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/4	LDZY-8101	A