

RoHS Pb Lead-free

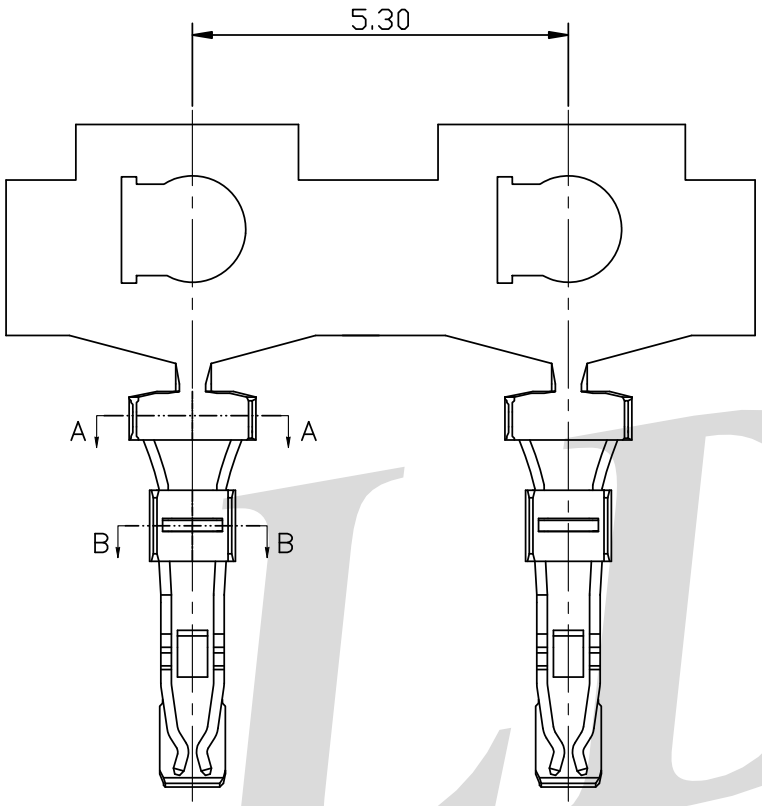

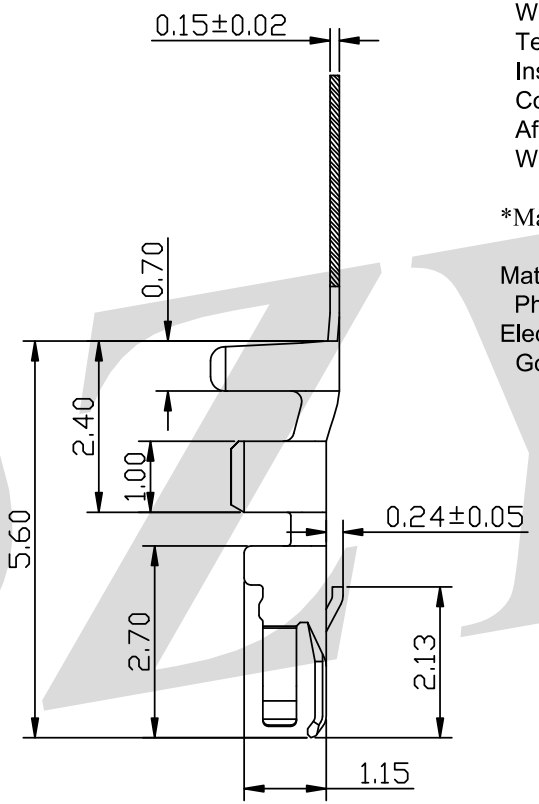


SPECIFICATIONS :
Voltage Rating：150V AC / DC
Current Rating： 3A AC / DC
Withstanding Voltage：500V AC/minute
Temperature Range：-25°C~+85°C
Insulation Resistance：1000MΩ Min.
Contact Resistance：20mΩ Max.
After environmental testing：40mΩ Max.
Wire Range：AWG#28~30.

*Mates with LDZY A1503H series Housing


Material：
Phosphor Bronze
Electroplating:
Gold Flash or Tin-plated

A1503 T F - P XX
① ②③ ④ ⑤


① Series No.：
② Category： T- Terminal
③ Terminal Type： F-mate with male housing
④ Material： P-Phosphor Bronze
⑤ Surface Finish ： T1-Tin Plated , G1- Gold Flash



SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1



Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish
A1503TF-PT1	AWG#28-30	1.1mm(max)	Phosphor Bronze	Tin-plated
A1503TF-PG1	AWG#28-30	1.1mm(max)	Phosphor Bronze	Gold Flash

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY® 东莞市蓝雁电子有限公司 Electronics DongGuan LDZY Electronics CO.,LTD.				料号 PART NO	A1503TF-PXX
											品名 TITLE	1.50mm Pitch Terminal
2022.9.29	A	B	依据实物修正图纸				核准 APPD	审核 CHK	绘图 DR	日期 DATA		
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰 雄	陆 波	2022/09/29	单位 UNIT mm	比例 SCALE 1/1	图号 NUMBER LDZY-81102	版次 REV B