



RoHS Pb Lead-free

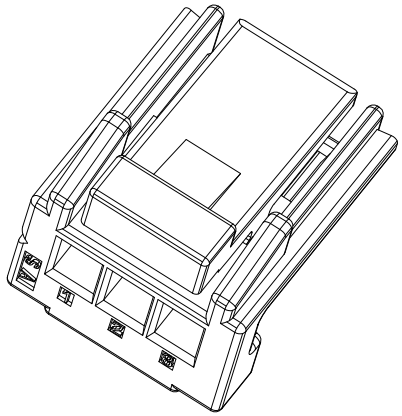

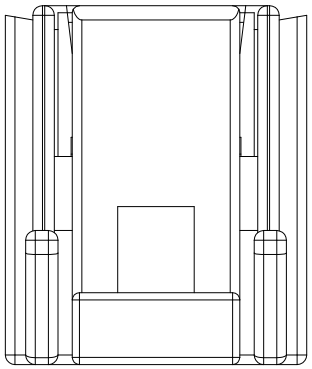

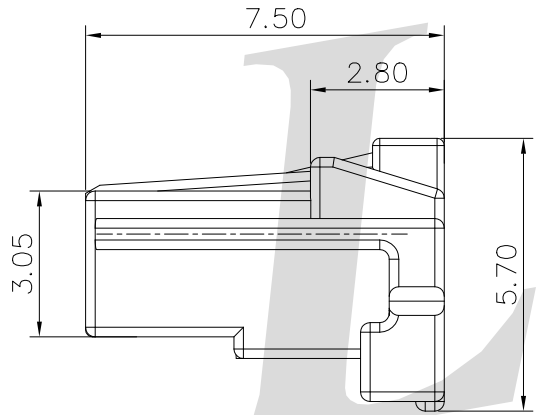

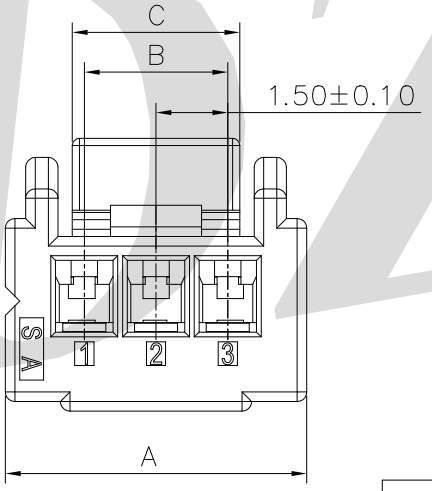

■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: −40℃~+105℃
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing：≤40mΩ

A1506 H - NP - P0 XX
① ② ③ ④ ⑤


① Series No.
② Category：H-Housing
③ Circuit No.:02-1*2PIN....16-1*16PIN
④ Material：P0-PBT,UL94V-0
⑤ Color：NA-Natural,BK-Black

Ordering Information & Dimensions


Poles	Dimensions(mm)			Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C		A	B	C
02	5.00	1.50	2.70	07	12.30	9.00	7.50	12	19.80	16.50	9.80
03	6.30	3.00	3.50	08	13.80	10.50	9.80	13	21.30	18.00	11.30
04	7.80	4.50	4.50	09	15.30	12.00	9.80	14	22.80	19.50	11.30
05	9.30	6.00	4.50	10	16.80	13.50	9.80	15	24.30	21.00	11.30
06	10.80	7.50	7.50	11	18.30	15.00	9.80	16	25.80	22.50	11.30

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY Electronics® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1506H-NP-P0XX	
											品名 TITLE 1.5mm Crimp Style connectors	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	核准 APPD	审核 CHK	绘图 DR	日期 DATA	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8101	版次 REV A
							周立鸿	兰 雄	潘昌文	2022/06/23				

RoHS Pb Lead-free




2PIN




3、4、6PIN


C View




2PIN



3、4PIN




6PIN




5、7-16PIN


D View




5、7、9PIN

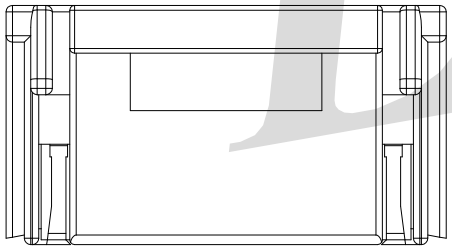

8PIN

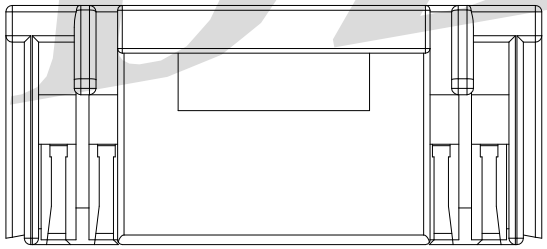

10、12、13PIN

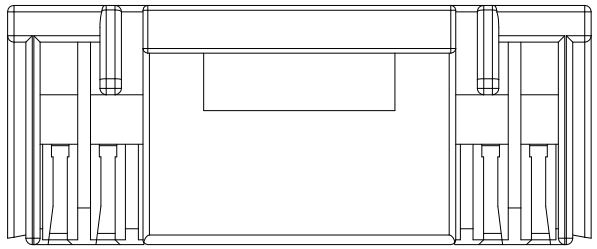

11、14-16PIN

LDZY

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY Electronics ® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1512H-NP-P0XX
											品名 TITLE 1.5mm Crimp Style connectors
2020/03/18		A	新模				核准 APPD	审核 CHK	绘图 DR	日期 DATA	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰 雄	潘昌文	2022/06/23	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY- / 版次 REV A