



RoHS Lead-free

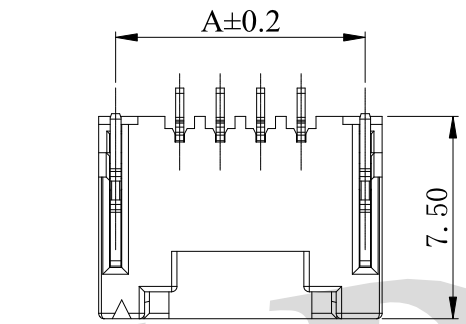


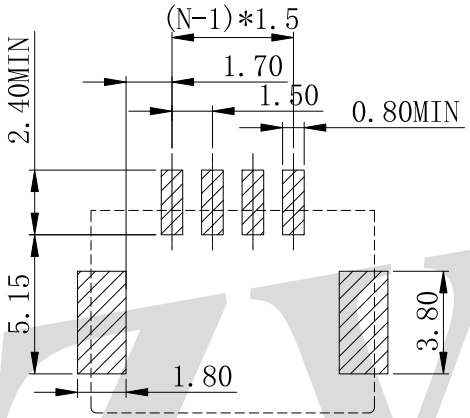



Recommended P.C.B Layout
General Tolerance±0.05

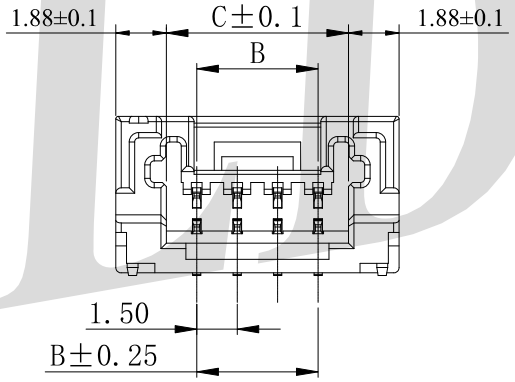

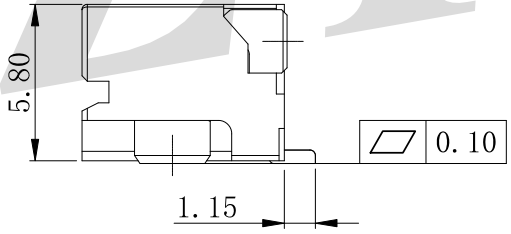


1~5PIN


6~9PIN


10~16 PIN

■ Specifications :
- Voltage rating: 125V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:Max 500MΩ
- Contact resistance: Min 20mΩ
- After Environmental Testing：40mΩ/Max
- *Mates with LDZY A1506 series Housing

■ *Material:
- Materal：9T-PA9T,UL94V-0,
- PIN: Phosphor bronze
- Plating Method：T- Tin Plated ,G-Gold Flash

A1506 W R S- NP - 9T XX X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Soldering Type：Blank-DIP Type, S-SMT Type,
⑤ Circuit No.：02-2PIN.....16-16PIN
⑥ Material：9T-PA9T UL94V-0
⑦ Color：NA-Natural ,BK-Black
⑧ Plating Method：T- Tin Plated ,G-Gold Flash

Ordering Information & Dimensions

Poles	Dimensions(mm)		
	A	B	C
02	6.25	1.50	3.75
03	7.75	3.00	5.25
04	9.25	4.50	6.75
05	10.75	6.00	8.25
06	12.25	7.50	9.75
07	13.75	9.00	11.25
08	15.25	10.50	12.75
09	16.75	12.00	14.25
10	18.25	13.50	15.75
11	19.75	15.00	17.25
12	21.25	16.50	18.75
13	22.75	18.00	20.25
14	24.25	19.50	21.75
15	25.75	21.00	23.25
16	27.25	22.50	24.75

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY Electronins® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1506WRS-NP-9TXXX
											品名 TITLE 1.50mm Crimp Style Connectors(Double post)
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	核准 APPD	审核 CHK	绘图 DR	日期 DATA	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8101 / 版次 REV A
							周立鸿	兰 雄	唐文舜	2022/11/22	