
RoHS Lead-free

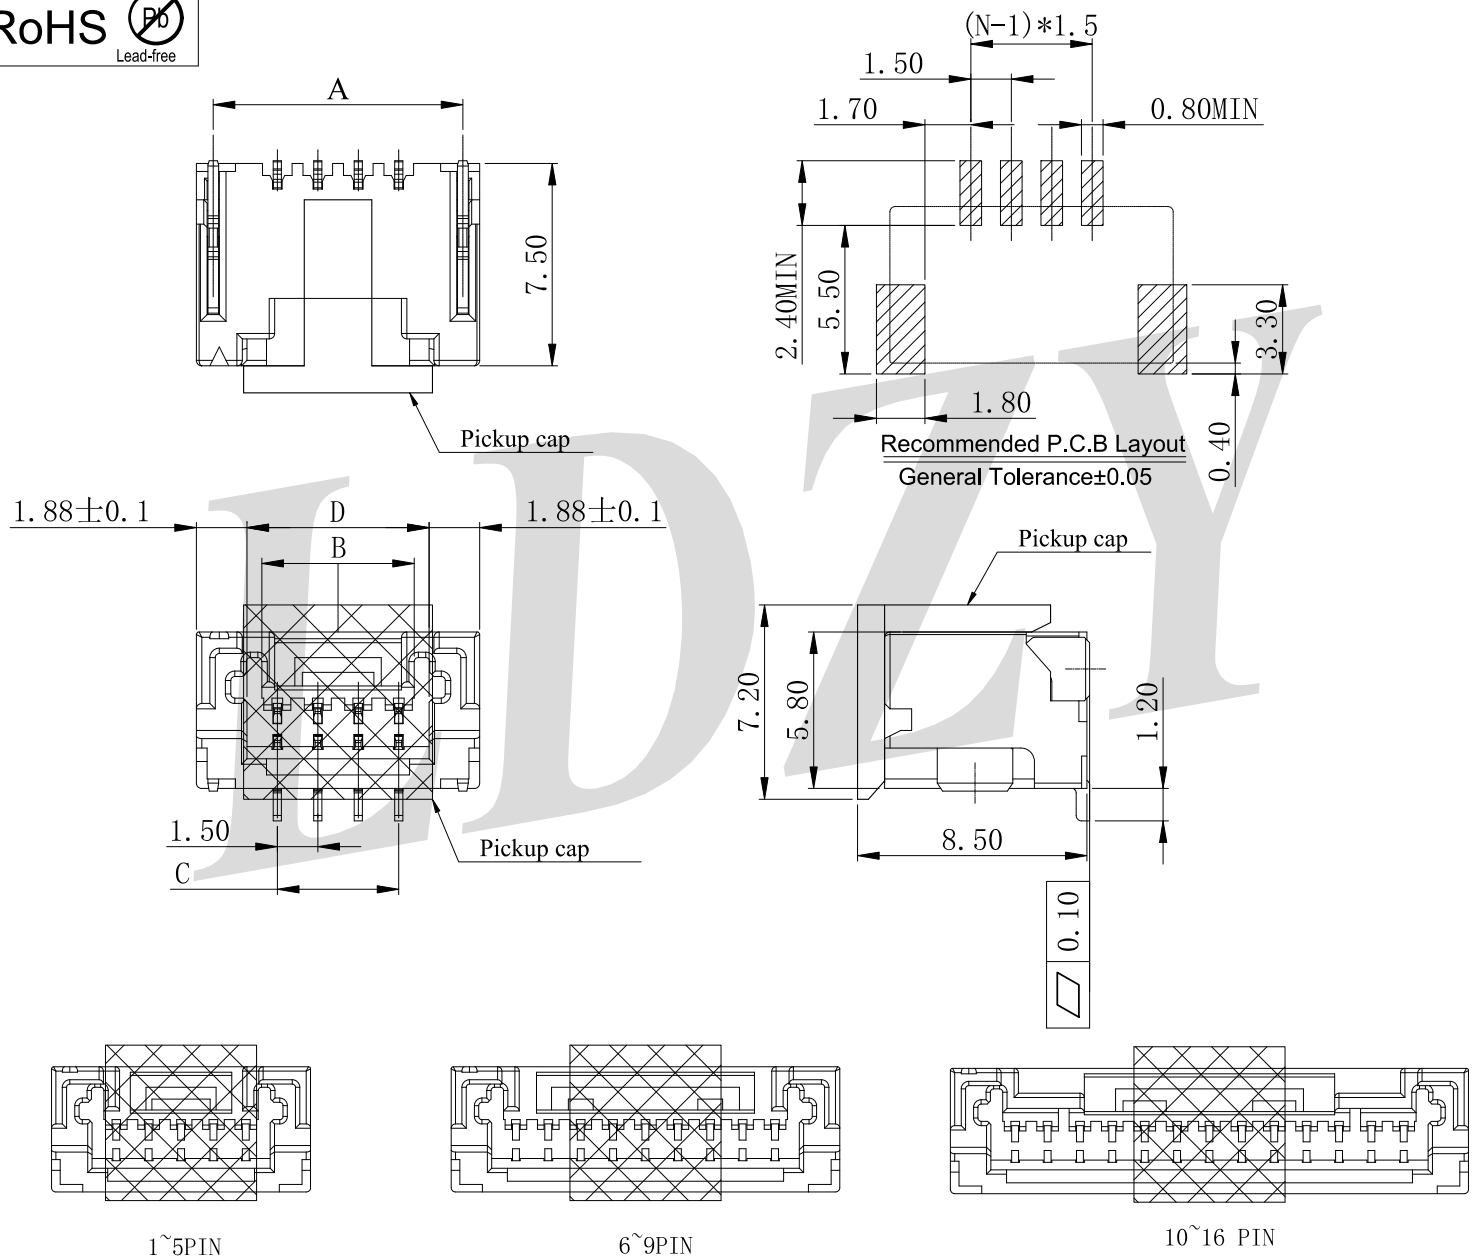

1~5PIN　　6~9PIN　　10~16 PIN

■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:Max 500MΩ
- Contact resistance: Min 20mΩ
- After Environmental Testing：40mΩ/Max
- *Mates with LDZY A1506 series Housing

■ *Material:

- Materal：9T-PA9T UL94V-0
- PIN: Phosphor bronze
- Plating Method：T- Tin Plated ,G-Gold Flash

A1506 W V S- NP - 9T XX X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-wafer
③ Welding Board Angle: V-Straight 180°
④ Soldering Type：S-SMT Type,
⑤ Circuit No.：02-2PIN.....16-16P
⑥ Material：9T-PA9T UL94V-0
⑦ Color：NA-Natural,BK-Black
⑧ Plating Method：T- Tin Plated ,G-Gold Flash

Ordering Information & Dimensions

Poles	Dimensions(mm)			
	A±0.2	B±0.2	C±0.2	D±0.2
02	6.25	2.65	1.50	3.75
03	7.75	4.15	3.00	5.25
04	9.25	5.65	4.50	6.75
05	10.75	7.15	6.00	8.25
06	12.25	8.65	7.50	9.75
07	13.75	10.15	9.00	11.25
08	15.25	11.65	10.50	12.75
09	16.75	13.15	12.00	14.25
10	18.25	14.65	13.50	15.75
11	19.75	16.15	15.00	17.25
12	21.25	17.65	16.50	18.75
13	22.75	19.15	18.00	20.25
14	24.25	20.65	19.50	21.75
15	25.75	22.15	21.00	23.25
16	27.25	23.65	22.50	24.75

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY Electronins® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1506WVS-NP-9TXXX
							核准 APPD	审核 CHK	绘图 DR	日期 DATA	品名 TITLE 1.50mm Crimp Style Connectors(Double post)
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰 雄	唐文舜	2023/05/23	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8101 / 版次 REV A