

RoHS Pb Lead-free

■ Specifications :


- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing：≤20mΩ

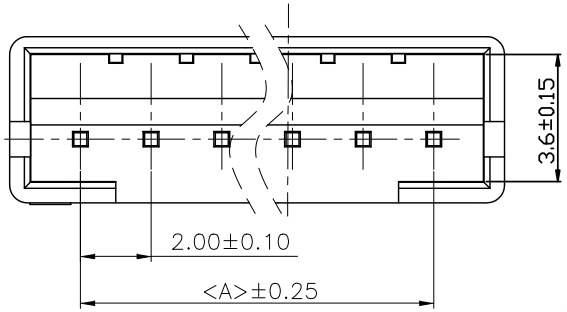


Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

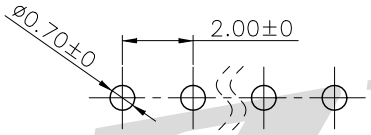


模穴号1.2.3...

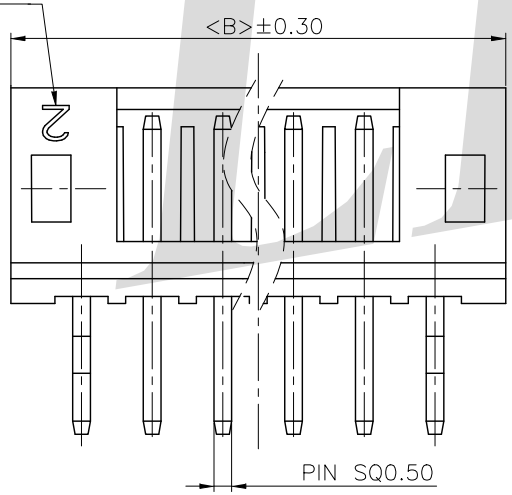

2 PIN 以上图示

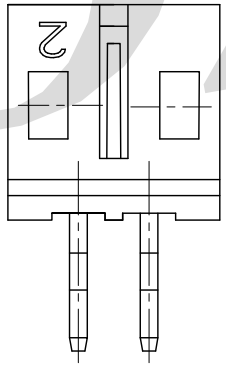


2 PIN 图示

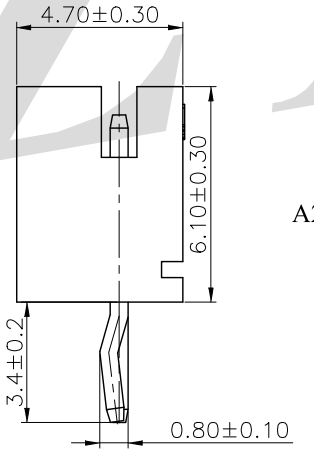


打反 “K”

A2001WV-NP-N0XXT2-



打正”K”

A2001WV-NP-N0XXT1-



无 “K”

A2001WV-NP-N0XXT-

■ Reference Informations:

*Material:
PIN: Brass
Wafer: Nylon 66,UL94V-0
Color:Natural(White)
*Mates with LDZY A2001 series Housing

A2001 WV - NP① N0② XX③ X④ X⑤ -⑥

① Circuit: 02~18PIN
② Material: N0-PA66 94V-0;
③ ColorL: NA-Natural, BK-Black,
④ Plating: G- Gold Flash T-Tin Plated, M-Matte Tin Plated
⑤ Other Types: Blank-Normal ,1-K TYPE 1; 2-K TYPE 2
⑥ Other：- LDZY-8197

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	6.00	11	20.00	24.00
03	4.00	8.00	12	22.00	26.00
04	6.00	10.00	13	24.00	28.00
05	8.00	12.00	14	26.00	30.00
06	10.00	14.00	15	28.00	32.00
07	12.00	16.00	16	30.00	34.00
08	14.00	18.00			
09	16.00	20.00			
10	18.00	22.00			

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1
角法 PROJECT

LDZY Electronics® 东莞市蓝雁电子有限公司
DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATE
Rodney	兰 雄	杨胜	2021/03/16

料号 PART NO A2001WV-NP-N0XXXX-
品名 TITLE 2.0mm Crimp Style Connector

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/1	LDZY-8197	A