
RoHS Lead-free




■ SPECIFICATIONS :


- Voltage Rating：125V AC / DC
- Current Rating： 2A AC / DC
- Withstanding Voltage：1000V AC/minute
- Temperature Range：-25°C~+85°C
- Insulation Resistance：1000MΩ Min.
- Contact Resistance：20mΩ Max.
- *Mates with LDZY A2008 series Housing

■ *Material:


PIN: Brass/Tin-plated
Wafer: PA66,UL94V-0
Color: Natural

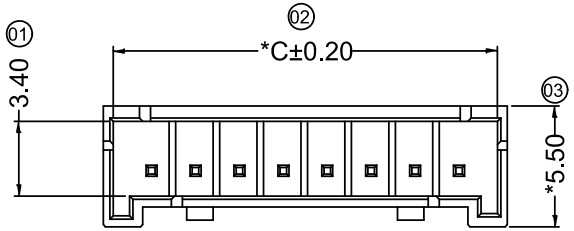

04P~15P Shape
Scale 1:1




02P Shape
Scale 1:1



03P Shape
Scale 1:1

$\frac{\text{A2008}}{}\ \frac{\text{W}}{}\ \frac{\text{V}}{①}\ -\frac{\text{NP}}{②}-\frac{\text{N0}}{③}\ \frac{\text{NA}}{④}\ \frac{\text{T}}{⑤}\ \frac{\text{K}}{⑥}$


① Appearance: V- Straight 180°
② The numbe of pin: 02-2PIN.....20-20PIN
③ Material: N0-PA66 UL94V-0
④ Color: NA-Natural
⑤ Plating:G-Gold Flash T-Tin Plated
⑥ Other Types:K-K type (打K脚)

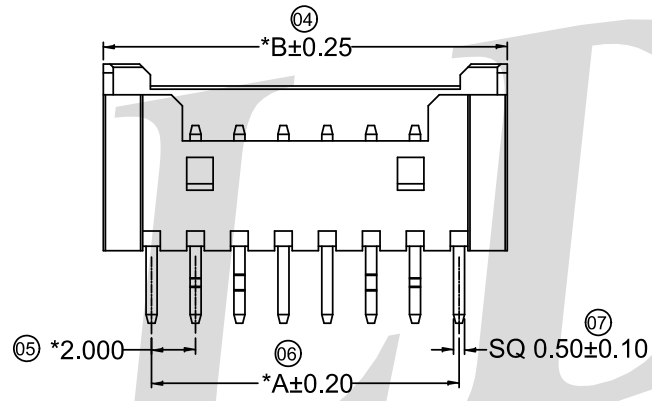

Recommended P.C.BLayout
General Tolerance±0.05

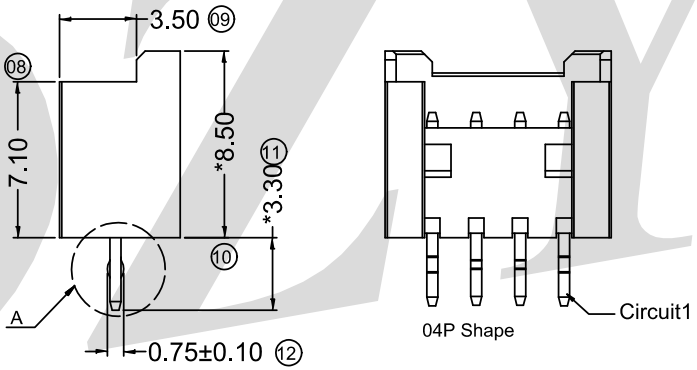

04P Shape

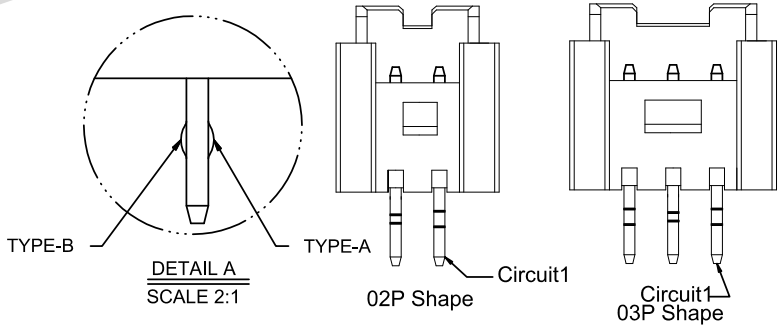

DETAIL A
SCALE 2:1
02P Shape
03P Shape

With K to Choose the type(A Or B)

PIN No / PoLes / TYPE	1	2	3	4	5	6	N-2	N-1	N
6 PIN Over	-	A	B	-	-	-	B	A	-
6 PIN	-	A	B	B	A	-			
5 PIN	A	B	-	B	A				
4 PIN	A	B	B	A					
3 PIN	A	B	A						
2 PIN	A	B							

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	7.70	5.30	09	16.20	20.50	19.60
03	4.00	9.70	7.30	10	18.20	22.50	21.60
04	6.00	10.30	9.30	11	20.20	24.60	23.60
05	8.00	12.30	11.30	12	22.20	26.60	25.70
06	10.00	14.30	13.30	13	24.20	28.70	27.70
07	12.10	16.40	15.50	14	26.20	30.70	29.70
08	14.10	18.40	17.50	15	28.30	32.80	31.60

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A2008WV-NP-N0NATK
											品名 TITLE 2.0mm Crimp Style connectors
2022-03-11	A	A1	根据实物修正图面				核准 APPD	审核 CHK	绘图 DR	日期 DATE	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8101 / 版次 REV A1
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰 雄	陆 波	2022/03/11	