
RoHS Pb Lead-free

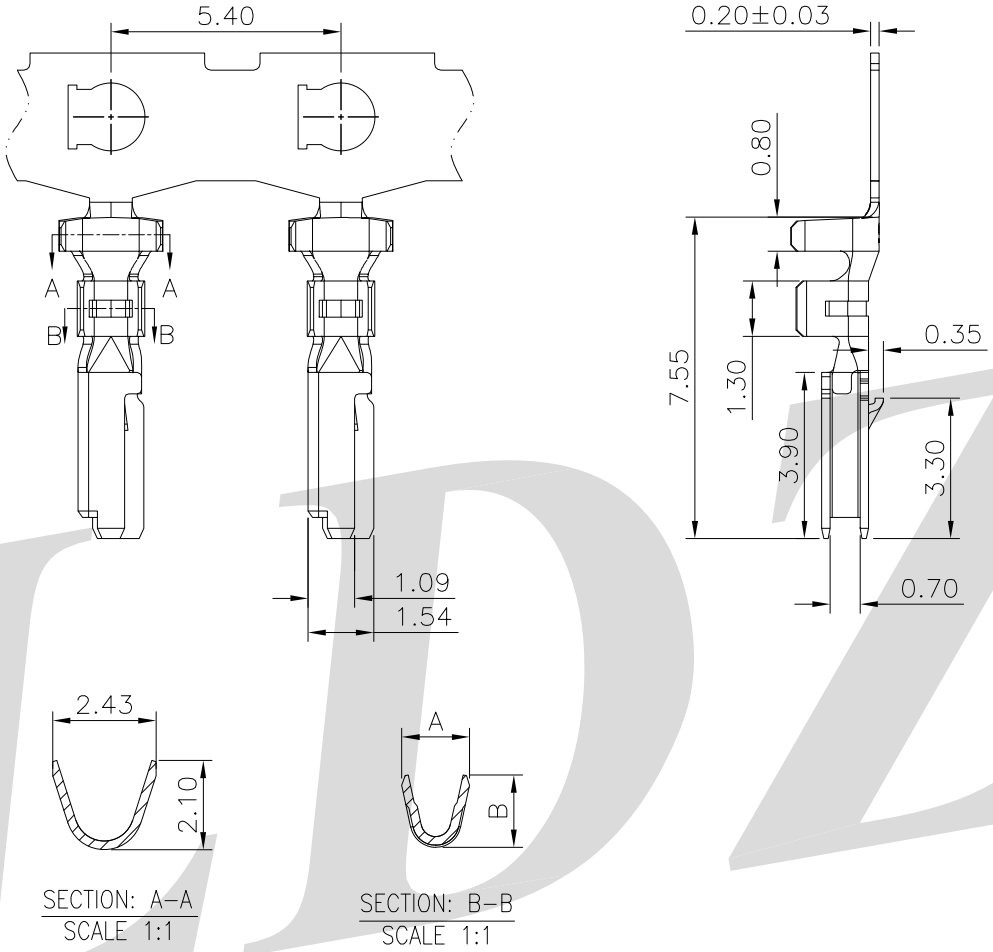

■ SPECIFICATIONS :

- Voltage Rating: 250V AC / DC
- Current Rating: 3A AC / DC
- Withstanding Voltage: 800V AC/minute
- Temperature Range: -40° C~+105° C
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 10mΩ Max.

■ *Material:

Terminal: Phosphor Bronze

Plating: Tin Plated

A2026 T F - P T1 X

① ② ③ ④ ⑤ ⑤

①Series No.:

②Category: T- Terminal

③Terminal Type: F-mate with male housing

④Shape: Blank-Low Barrel;H-High Barrel

⑤Material: P-Phosphor Bronze

⑥Shape: Blank-Normal,L-低脚

Ordering Information & Specifications

P/N	Wire Range	Insulation O.D.	Finish	Suitable LDZY Housing	Dim A	Dim B
A2026TF-PT1	AWG#22~24 (0.35~0.22mm²)	Ø1.4mm Max	Ni 40~120u" (1~3um)overall	A2026H	1.60	1.70
A2026TF-PT1L	AWG#24~26 (0.22~0.13mm²)	Ø1.2mm Max	Sn 80~200u" (2~5um)overall		1.45	1.35

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
角法 PROJECT

LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATA
周立鸿	兰 雄	陆 波	2022/09/06

料号 PART NO A2026TF-PT1X

品名 TITLE 2.0mm Crimp Style connectors

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/1	LDZY-8101	A