



RoHS Lead-free

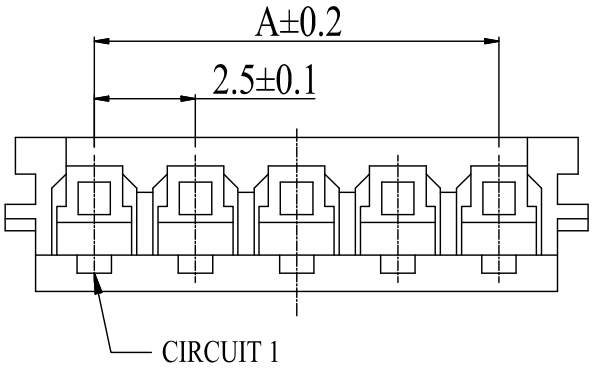

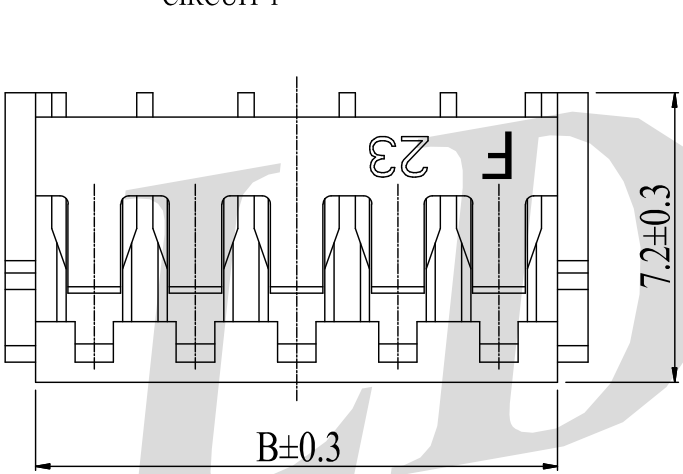

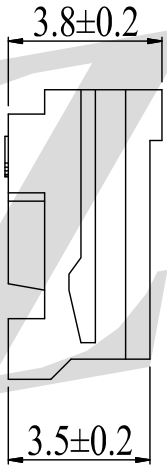

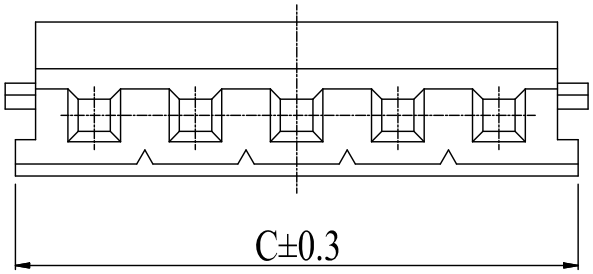

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: −25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V−0
Color: Natural(White)

A2502 H - NP - N0 WH
① ② ③ ④ ⑤

①Series:
②lastic Shell Category：H- Housing
③The Number of Pin:02~15PIN
④Material: N0-PA66 UL 94V-0
⑤Color: WH-White

Ordering Information & Dimensions

POLES	A	B	C
2	2.50	5.40	6.40
3	5.00	7.90	8.90
4	7.50	10.40	11.40
5	10.00	12.90	13.90
6	12.50	15.40	16.40
7	15.00	17.90	18.90
8	17.50	20.40	21.40
9	20.00	22.90	23.90
10	22.50	25.40	26.40
11	25.00	27.90	28.90
12	27.50	30.40	31.40
13	30.00	32.90	33.90
14	32.50	35.40	36.40
15	35.00	37.90	38.90

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO	A2502H-NP-N0WH
2026/06/10	B	C	按实物更新图面								品名 TITLE	2.5mm Crimp Style connectors
2025/12/13	A	B	按实物修正图面				核准 APPD	审核 CHK	绘图 DR	日期 DATE		
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	兰 雄	唐文舜	W L	2026/06/10	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8105	版次 REV C