

RoHS Pb Lead-free

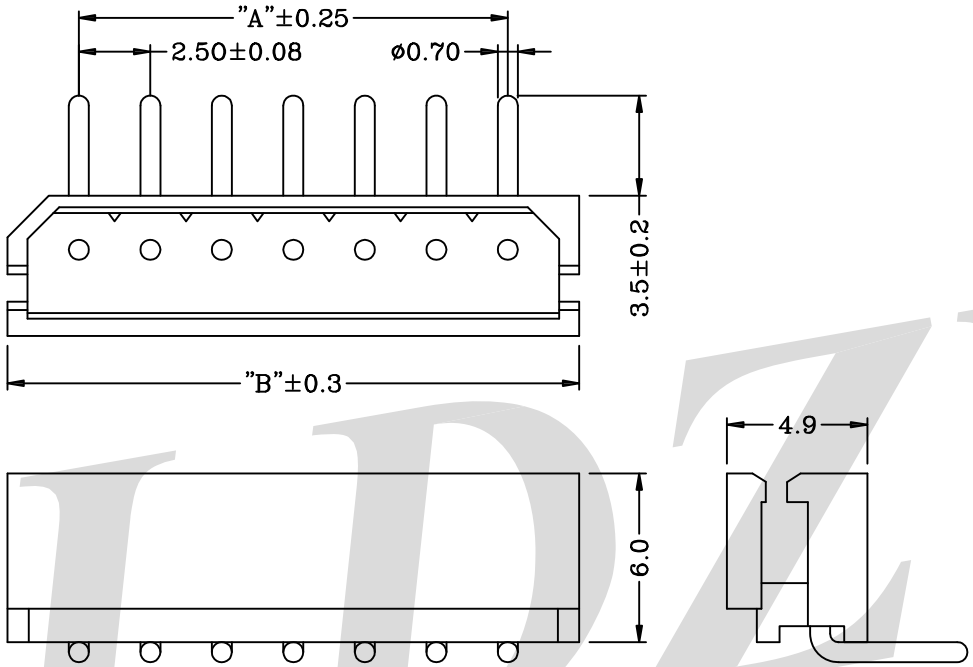



PCB LAYOUT

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: −25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin−plated
Material: Nylon 66,UL94V−0
Pantone Color: Natural

A2506 W R - NP - N0 NA T
① ②③ ④ ⑤ ⑥ ⑦

① Series No.
② Category：W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Circuit No.：02~16PIN,
⑤ Material：NO-PA66 UL94V-0,
⑥ Color：NA-Natural,
⑦ Plating Method：T-Tin-Plated,

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.50	7.50	12	27.50	32.50
03	5.00	10.00	13	30.00	35.00
04	7.50	12.50	14	32.50	37.50
05	10.00	15.00	15	35.00	40.00
06	12.50	17.50	16	37.50	42.50
07	15.00	20.00			
08	17.50	22.50			
09	20.00	25.00			
10	22.50	27.50			
11	25.00	30.00			

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY Electronics® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A2506WR-NP-N0NAT
											品名 TITLE 2.5mm Crimp Style connectors
2011/06/30	A	B	修改图框格式				核准 APPD	审核 CHK	绘图 DR	日期 DATA	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8105 / 版次 REV B
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	Rodney	兰 雄	刘小菊	2010/11/10	