
RoHS Lead-free

■ Specifications :


- Voltage rating: 30V AC / DC
- Current rating: 3.0A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥100MΩ
- Contact resistance: ≤20mΩ
- *Suitable LDZY A1300series Housing


■ Material：

- Wafer： PA4T UL94V-0，
- Color：Black,Natural
- Conductor：Brass/Gold Flash

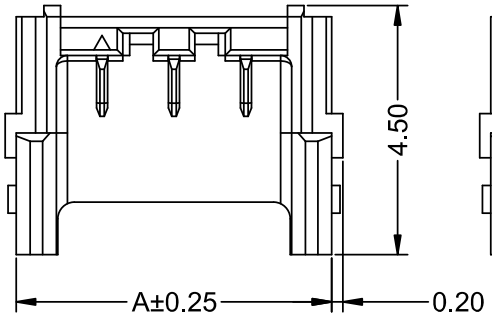

3~12Pin Shape



2Pin Shape

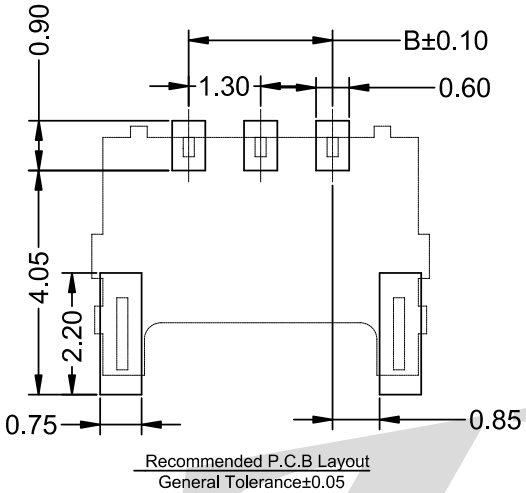


Recommended P.C.B Layout
General Tolerance±0.05

A1300 W R S - NP - 4T XX G
① ②③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category：W-wafer
③ Welding Board Angle: R-Vertical 90°
④ Welding Way：S-SMT Type;
⑤ Circuit No.：02-2PIN,
⑥ Material： 4T-PA4T,UL94V-0
⑦ Color：BK-Black,NA-Natural
⑧ Plating Method：G-Gold Flash,

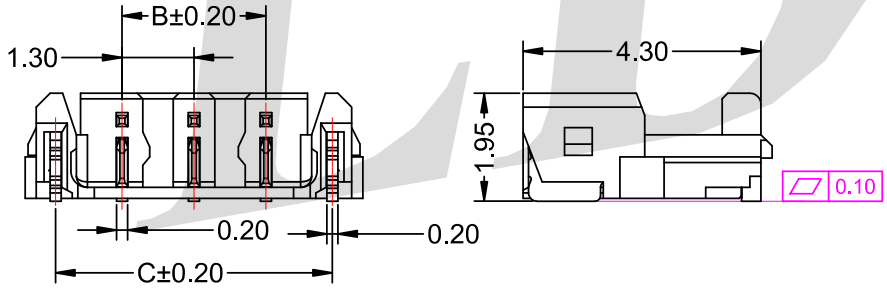



Poles	Dimensions (mm)		
	A	B	C
1x02	4.40	1.30	3.70
1x03	5.70	2.60	5.00
1x04	7.00	3.90	6.30
1x05	8.30	5.20	7.60
1x06	9.60	6.50	8.90
1x07	10.90	7.80	10.20
1x08	12.20	9.10	11.50
1x09	13.50	10.40	12.80
1x10	14.80	11.70	14.10
1x11	16.10	13.00	15.40
1x12	17.40	14.30	16.70

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1300WRS-NP-4TXXG
											品名 TITLE 1.30mm 90°SMT Wafer
2022/11/26	A	B	更新图面				核准 APPD	审核 CHK	绘图 DR	日期 DATE	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	Rodney	兰 雄	易小许	2016/07/15	单位 UNIT mm / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8101 / 版次 REV B