


RoHS Pb Lead-free



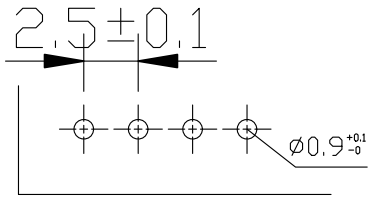

PCB LAYOUT

使用温度范围 (Ambient temperature Range):-25° ~+85°
适用线规 (Applicable Wires):AWG 28#~22#
适用基板厚度 Applicable PCboard thickness):1.6mm
额定电压 (Voltage rating):250V AC,DC
额定电流 (Current rating):3A
接触电阻 Contact Resistance): ≤0.02Ω
绝缘电阻 (Insulation Resistance):≥1000MΩ
耐压 (Withstand Voltange):1000V/min
材料 (Material)
1.基座: PA66 FV2 增强尼龙
2.插针: 黄铜

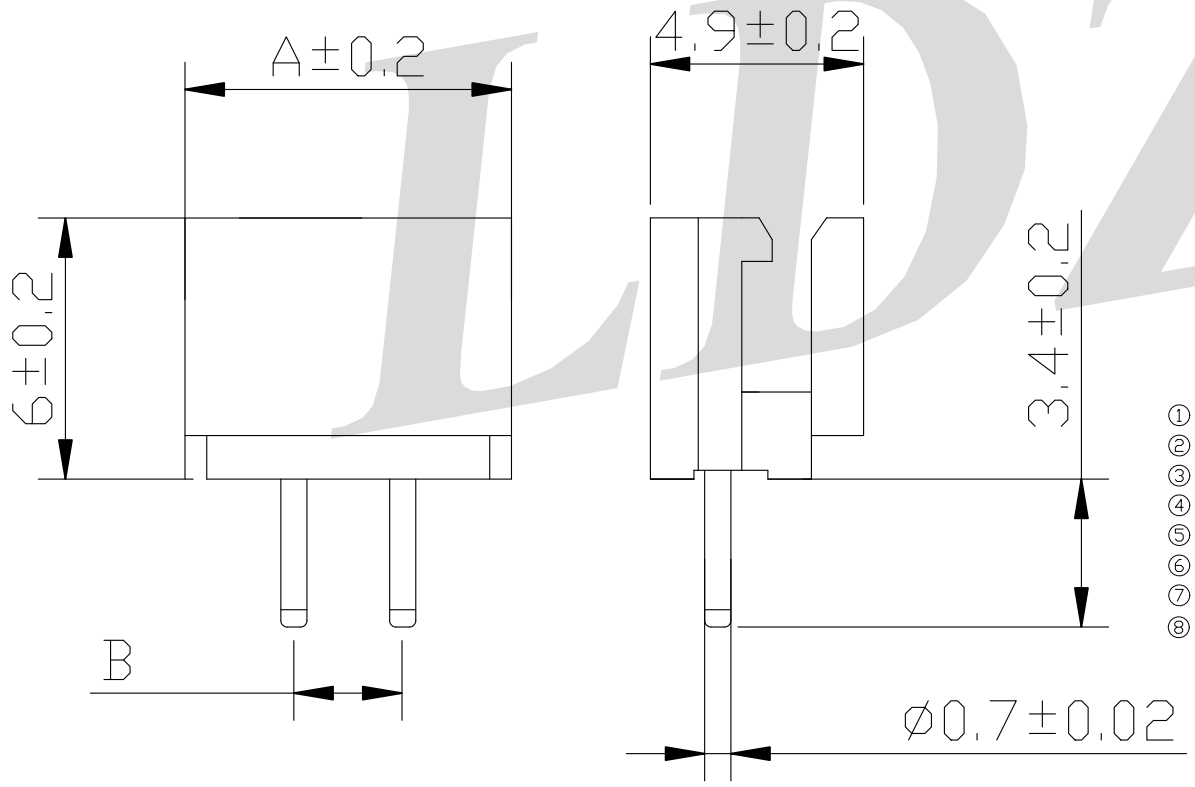

A2506 W V - NP - N0 NA T - A
① ②③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-wafer
③ Welding Board Angle: V- Straight 180°
④ Circuit No.: 02~20PIN,
⑤ Material: N0-PA66 UL94V-0,
⑥ Color: NA-Natural,WH-White
⑦ Plating Method: T-Tin-Plated,
⑧ Other:A-LDZY-8174

Ordering Information & Dimensions

孔位	A	B
2	7.5	2.5
3	10	5.0
4	12.5	7.5
5	15.0	10.0
6	17.5	12.5
7	20.0	15.0
8	22.5	17.5
9	25.0	20.0
10	27.5	22.5
11	30.0	25.0
12	32.5	27.5
13	35.0	30.0
14	37.5	32.5
15	40.0	35.0
16	42.5	37.5

						一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1	LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A2506WV-NP-N0NAT-A
											品名 TITLE 2.5mm Crimp Style Connector
2022/11/14	A	B	更新图面				核准 APPD	审核 CHK	绘图 DR	日期 DATA	
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰雄	潘昌文	2022/10/28	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8174 / 版次 REV B