
RoHS Pb Lead-free

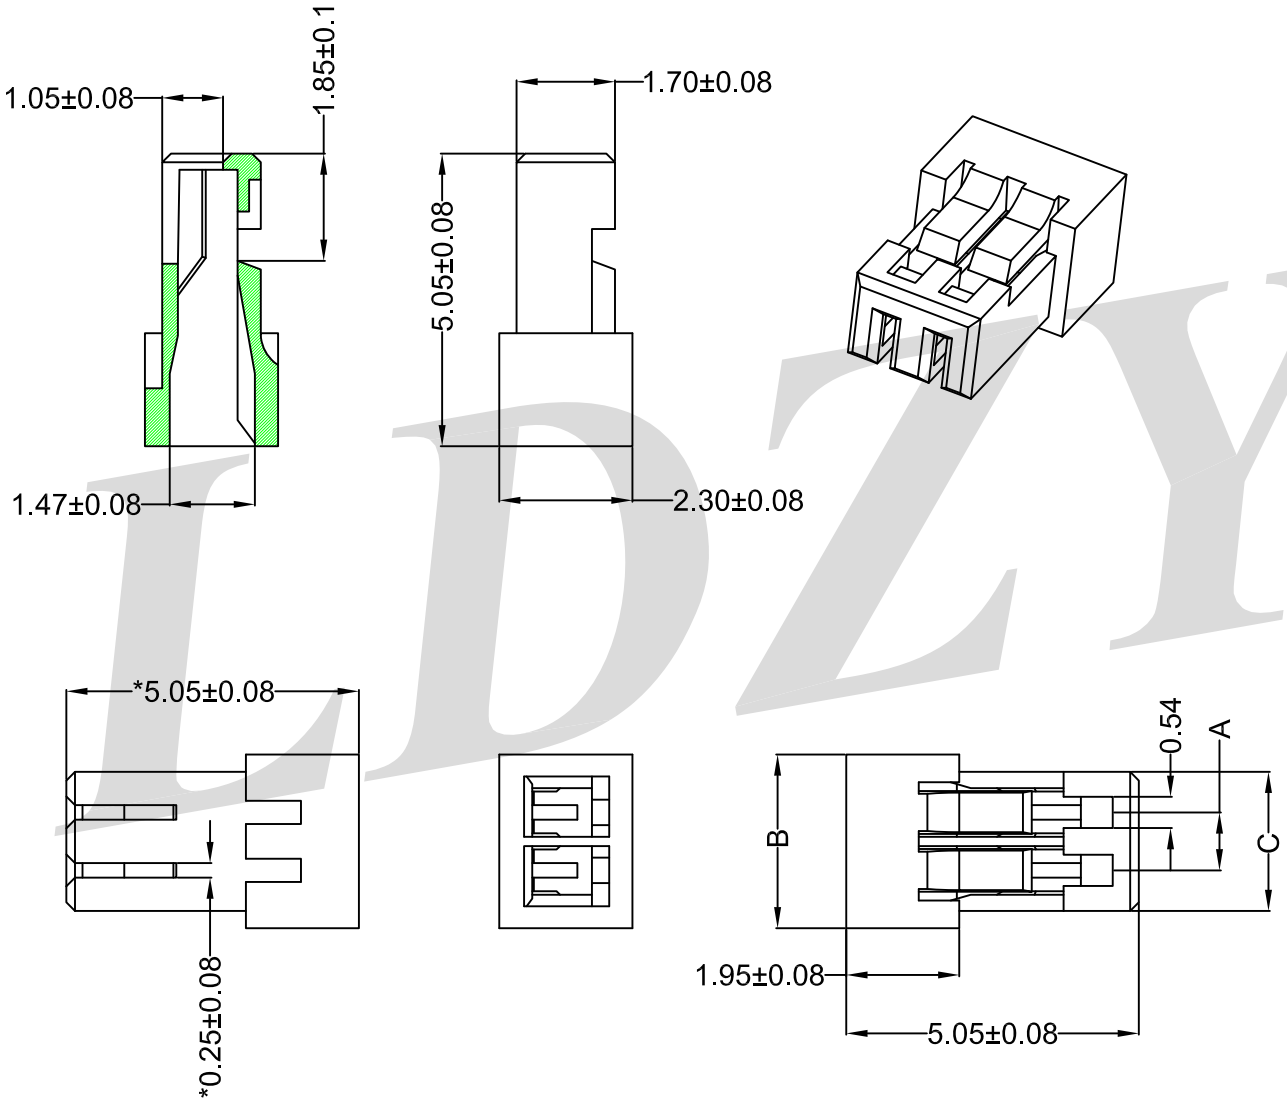

■ Specifications :

- Voltage rating: 125 AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing：≤40mΩ

A1002 H - NP - N0 NA
① ② ③ ④ ⑤

① Series No.
② Category：H-Housing
③ Circuit No.:02~16PIN
④ Material：N0-PA66, UL94V-0
⑤ Color：NA-Natural

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
2	1.00	3.00	2.40
3	2.00	4.00	3.40
4	3.00	5.00	4.40
5	4.00	6.00	5.40
6	5.00	7.00	6.40
7	6.00	8.00	7.40
8	7.00	9.00	8.40
9	8.00	10.00	9.40
10	9.00	11.00	10.40
11	10.00	12.00	11.40
12	11.00	13.00	12.40
13	12.00	14.00	13.40
14	13.00	15.00	14.40
15	14.00	16.00	15.40
16	15.00	17.00	16.40

LDZY

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
角法 PROJECT

LDZY Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATA
Rodney	兰 雄	易小许	2021/07/23

料号 PART NO: A1002H-NP-N0NA
品名 TITLE: 1.0mm Crimp Style connectors

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
mm	1/1	LDZY-8713	A