
RoHS Pb Lead-free

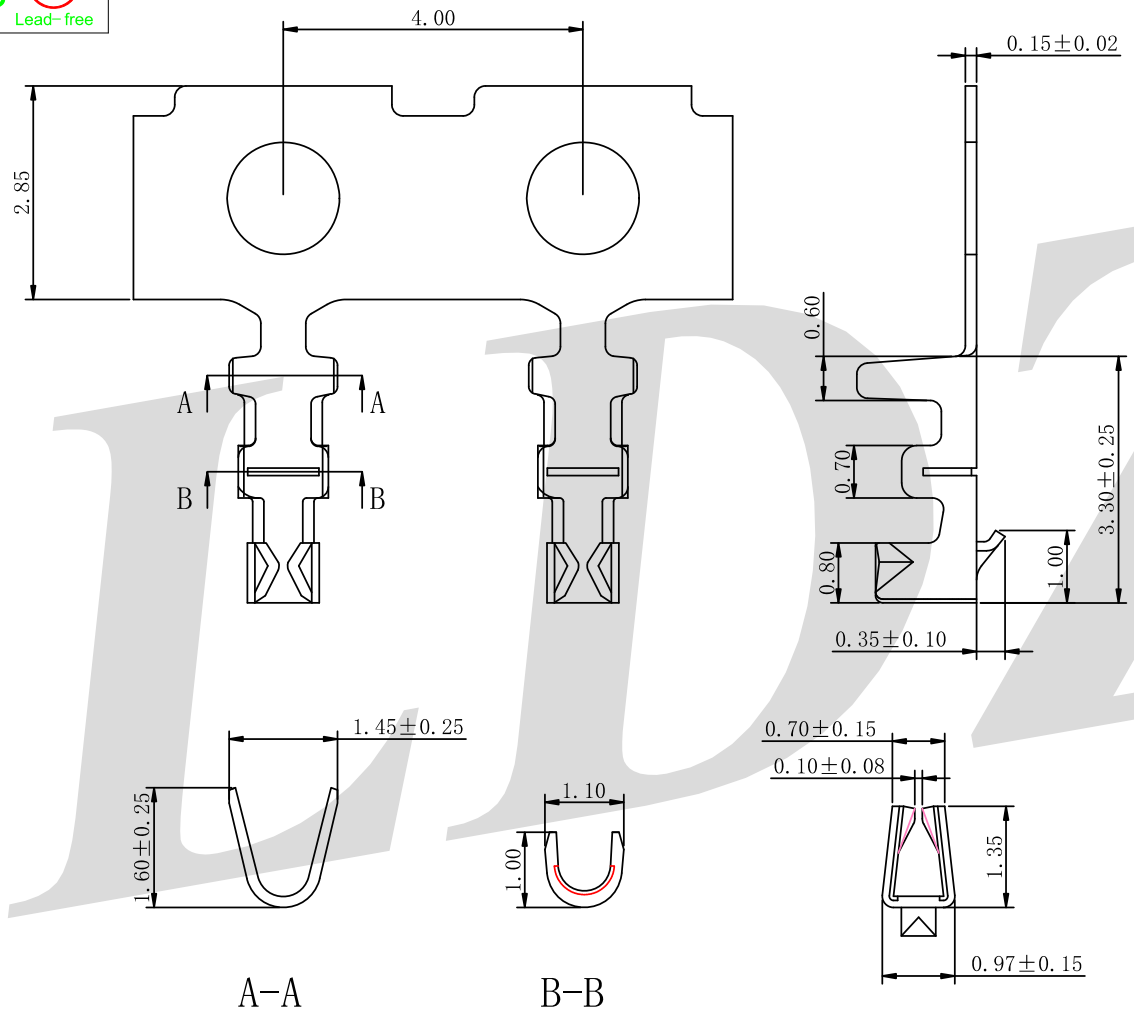

■ SPECIFICATIONS :


- Voltage Rating: 125V AC / DC
- Current Rating: 1A AC / DC
- Withstanding Voltage: 500V AC/minute
- Temperature Range: -25° C~+85° C
- Insulation Resistance: 100MΩ Min.
- Contact Resistance: 20mΩ Max.
- *Mates with LDZY A1250HF series Housing

■ *Material:

Terminal: Phosphor Bronze
Plating: Tin Plated

A1250 T F X - P XX A
① ②③④ ⑤ ⑥⑦

① Series No.:
② Category: T- Terminal
③ Terminal Type: F-mate with male housing
④ Feature Type: Blank-Common
⑤ Material: P-Phosphor Bronze, B-Brass
⑥ Plating : T1-Tin Plated, G1-Gold Flash,
⑦ Other Feature: Blank-Common, A-A type(紧端)

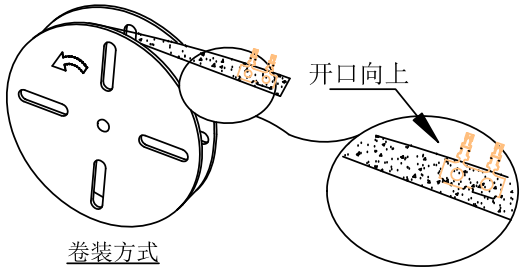

卷装方式

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1250TF-PG1A	AWG#26-#30	1.00mm(max)	Phosphor Bronze	Gold flash	20,000pcs
A1250TF-PT1A	AWG#26-#30	1.00mm(max)	Phosphor Bronze	Tin Plated	20,000pcs

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY® Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1250TF-PXXA
											品名 TITLE 1.25mm Crimp Style connectors
2022/07/25	A	B	新模				核准 APPD	审核 CHK	绘图 DR	日期 DATE	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8803 / 版次 REV B
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰 雄	陆 波	2022/07/25	