
RoHS Pb Lead-free

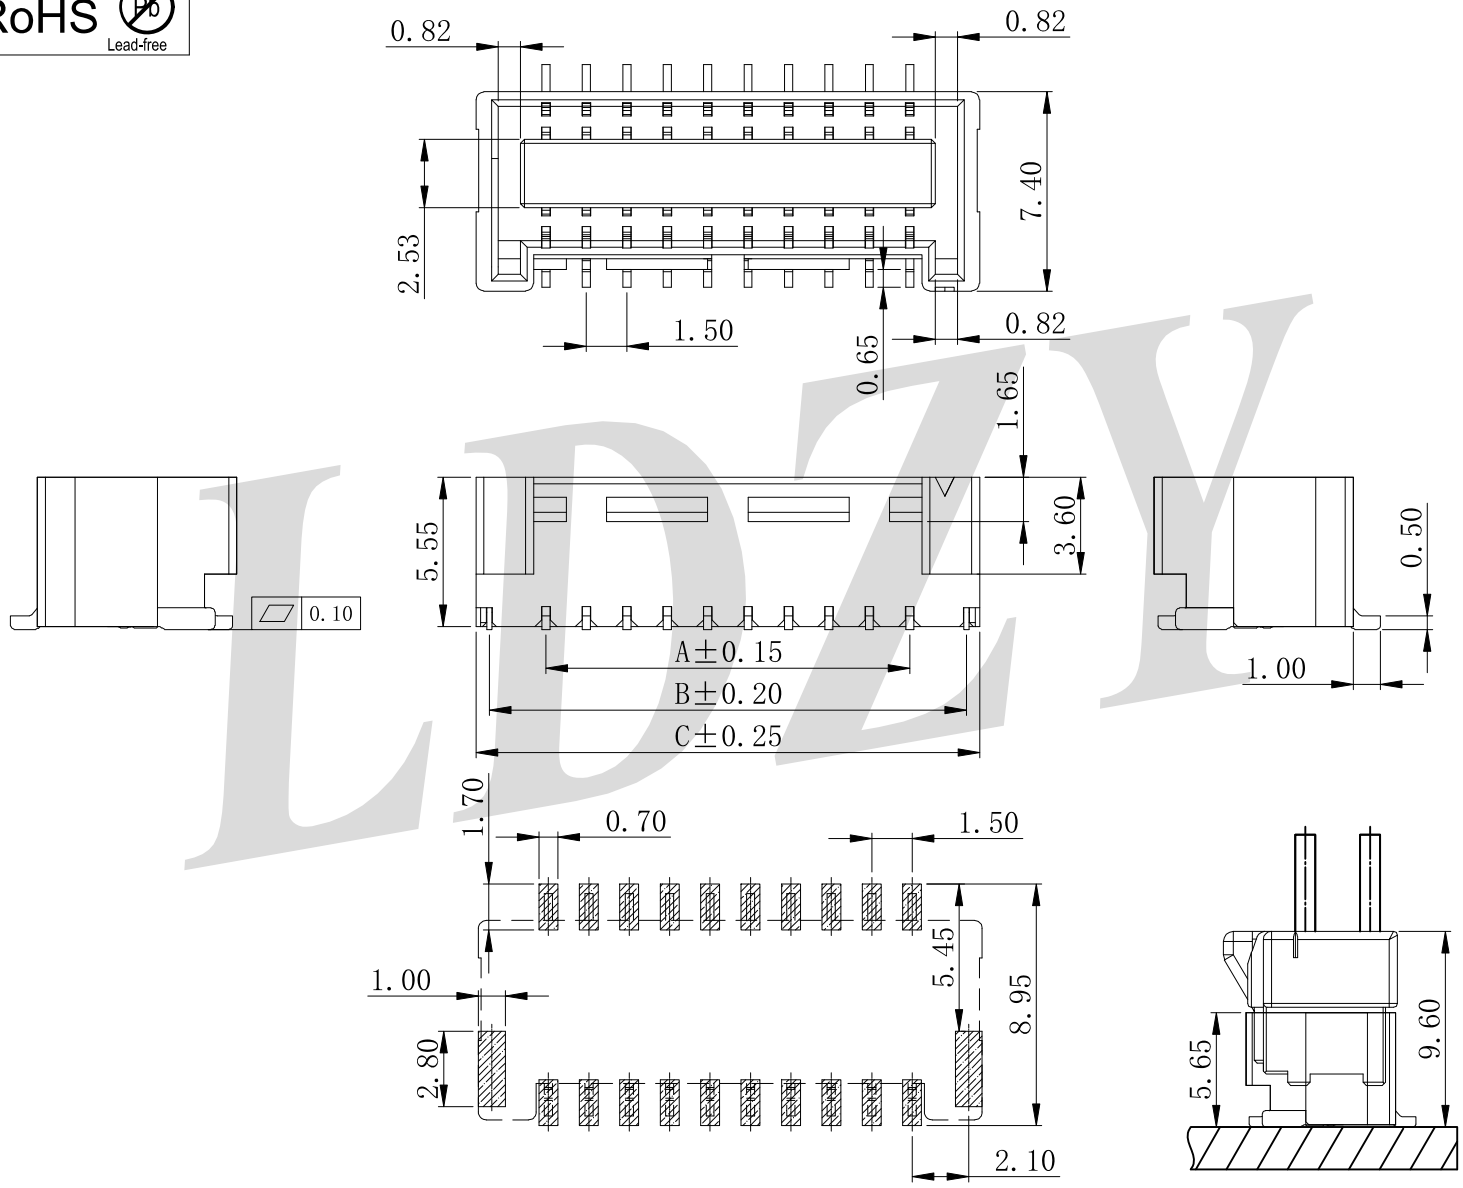

Recommended P.C.B Layout
General Tolerance±0.05

嵌合图
MATED CONNECTORS

■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC(10P~30P)
  1.5A AC/DC(32P~40P)
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:Max 500MΩ
- Contact resistance: Min 30mΩ
- After Environmental Testing：50mΩ/Max
- *Mates with LDZY A1505 series Housing

■ *Material:

- Materal：LCP,UL94V-0, Natural
- PIN: Solder Tabs:Brass/tin plated
- Plating Method：Brass/ Gold flash

A1505 W V S- 2NP - L0 NA G
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-wafer
③ Welding Board Angle: V-Straight 180°
④ Soldering Type：S-SMT Type,
⑤ Circuit No.：210-2*05PIN,212-2*06PIN.....
⑥ Material：L0-LCP,UL94V-0
⑦ Color：NA-Natural
⑧ Plating Method：G- Gold flash

Ordering Information & Dimensions

Poles	Dimension mm		
	A	B	C
2*05	6.00	10.20	11.20
2*06	7.50	11.70	12.70
2*07	9.00	13.20	14.20
2*08	10.50	14.70	15.70
2*09	12.00	16.20	17.20
2*10	13.50	17.70	18.70
2*11	15.00	19.20	20.20
2*12	16.50	20.70	21.70
2*13	18.00	22.20	23.20
2*14	19.50	23.70	24.70
2*15	21.00	25.20	26.20
2*16	22.50	26.70	27.70
2*17	24.00	28.20	29.20
2*18	25.50	29.70	30.70
2*19	27.00	31.20	32.20
2*20	28.50	32.70	33.70

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	LDZY Electronins® 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1505WVS-2NP-L0NAG
											品名 TITLE 1.5mm Crimp Style connectors
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	核准 APPD	审核 CHK	绘图 DR	日期 DATA	单位 UNIT MM / 比例 SCALE 1/1 / 图号 NUMBER LDZY-8115 / 版次 REV A
							Rodney	兰 雄	Lce	2022/11/16	

LDZY