




RoHS Pb Lead-free

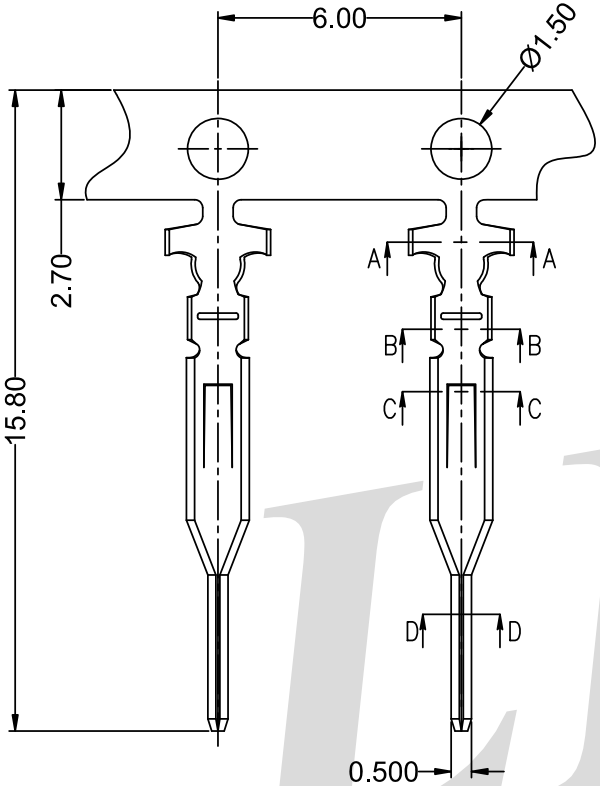


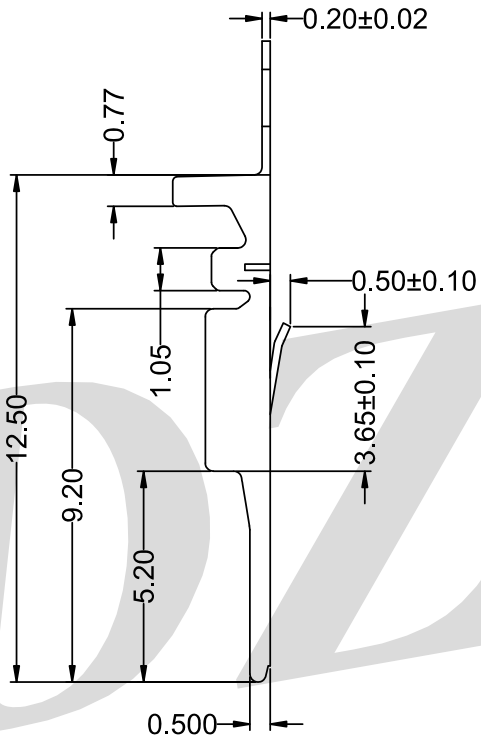










■ Specifications :

- Voltage Rating: 250V AC / DC
- Current Rating: 3A AC / DC
- Withstanding Voltage: 800V AC/Minute
- Temperature Range: -25°C~+85°C
- Insulation Resistance: 1000MΩ/Min
- Contact Resistance: 10mΩ/Max
- After Environmental Testing： 20mΩ/Max
- Wire Range：AWG#22-#28
- *Used in LDZY A2004HMB series Housing

■ *Material:
Terminal：Phosphor Bronze
Finish： Tin plated or Gold flash

A2004 T M B - P T1
① ② ③ ④ ⑤ ⑥

① Series No:A2004
② Category：T-terminal
③ Terminal type：M-Mate with female housing
④ Colloid Feature：B-B TYPE
⑤ Material：P-Phosphor Bronze，B-Brass
⑥ Plating specification：T1-Tin plated, G1-gold plated,

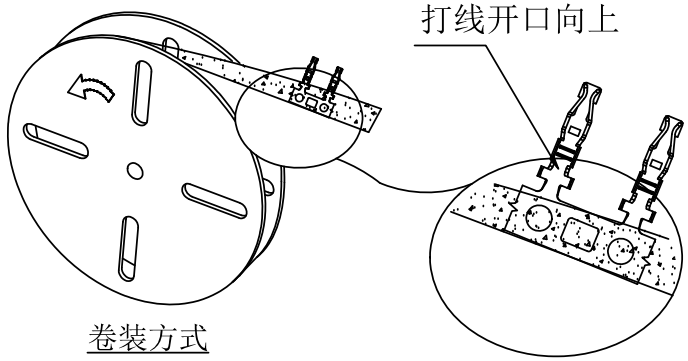

卷装方式

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2004TMB-PT1	AWG#22-#28	1.45mm(max)	Phosphor Bronze	Tin Plated	10,000pcs
A2004TMB-PG1	AWG#22-#28	1.45mm(max)	Phosphor Bronze	Gold Plated	10,000pcs

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD

一般公差 GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
角法 PROJECT

LDZY® Electronics 东莞市蓝雁电子有限公司
DongGuan LDZY Electronics CO.,LTD.

核准 APPD	审核 CHK	绘图 DR	日期 DATE
周立鸿	兰 雄	唐文舜	2024/01/09

料号 PART NO: A2004TMB-PXX
品名 TITLE: 2.0mm Crimp Style connectors

单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
MM	1/1	LDZY-8158	A